


BOWL T-84506

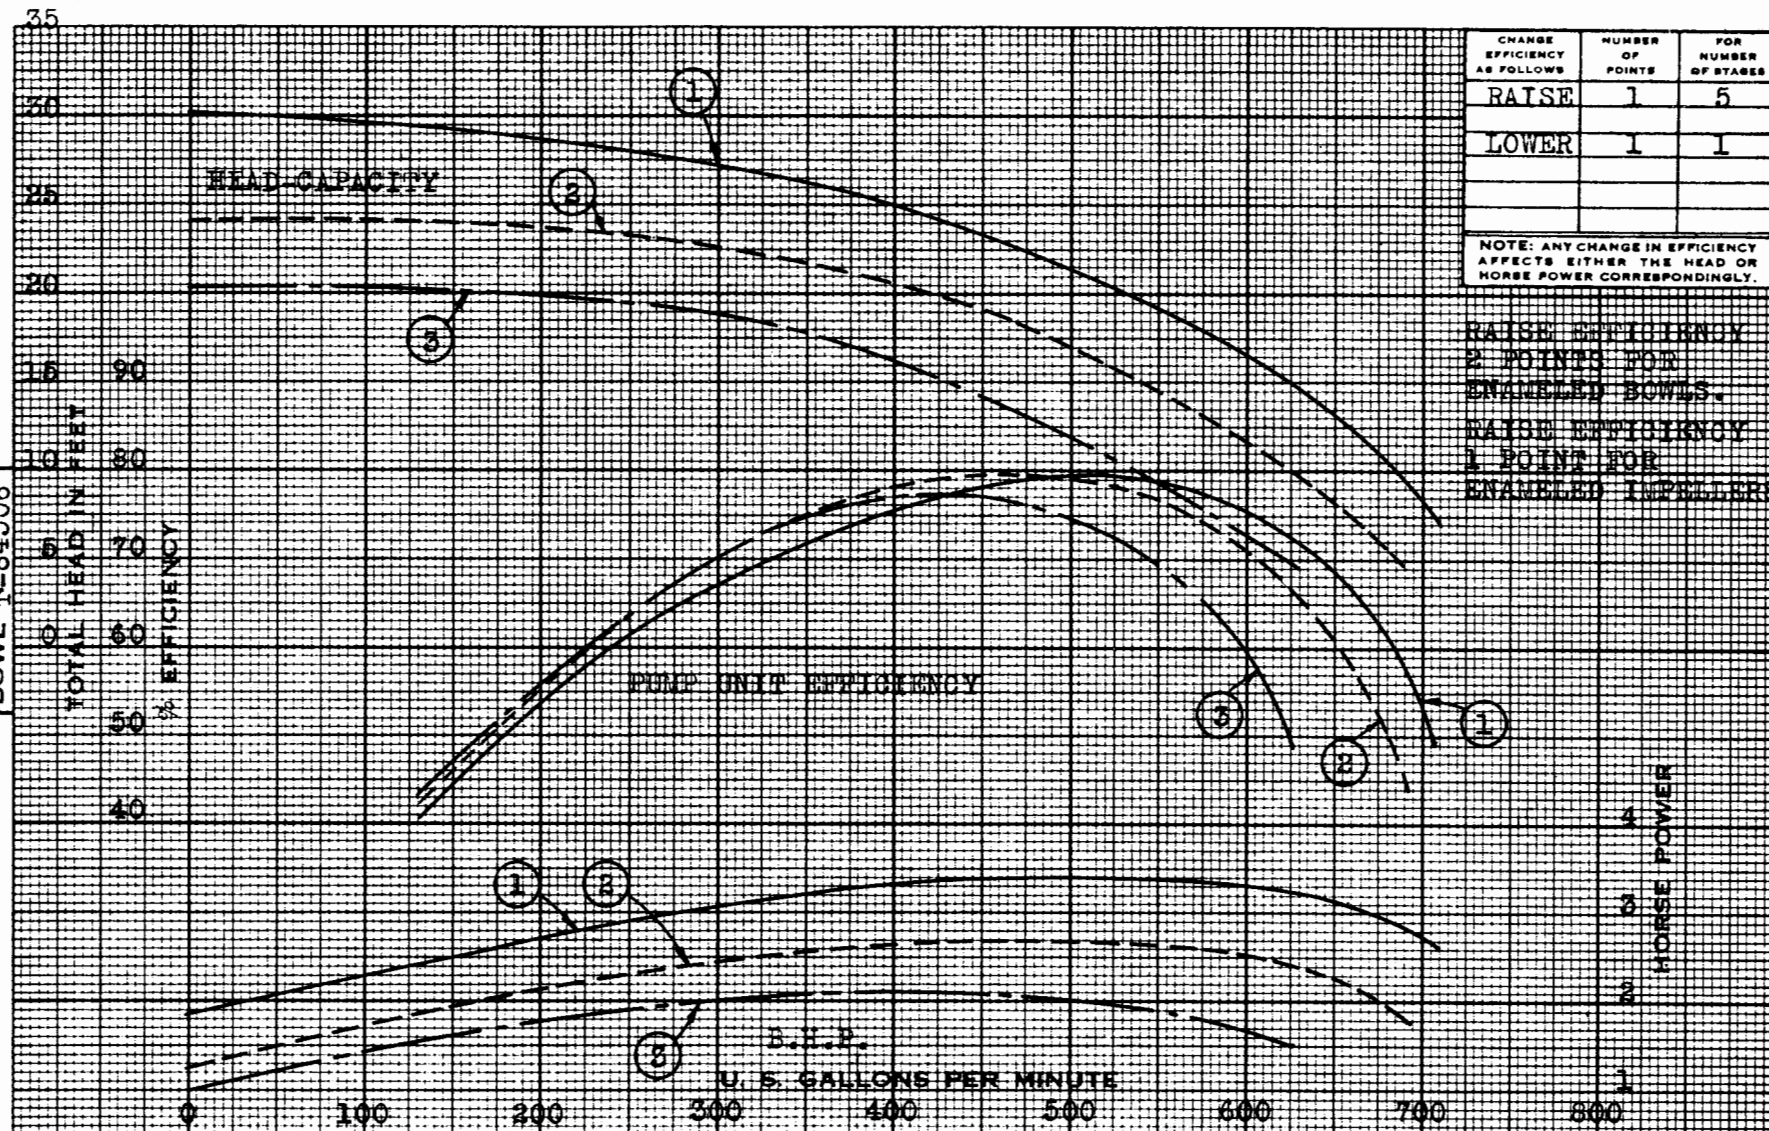

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	5
LOWER	1	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

RAISE EFFICIENCY 2 POINTS FOR ENAMELED BOWLS.
RAISE EFFICIENCY 1 POINT FOR ENAMELED IMPELLERS

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRAISIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED	1	T-84531	8-11/16	4465
	2	"	8-3/16	4469
	3	"	7-11/16	4471

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE

12" MA	DEEP WELL
1160	TURBINE PUMP
	R. P. M.
SHEET NO.	R-1111