


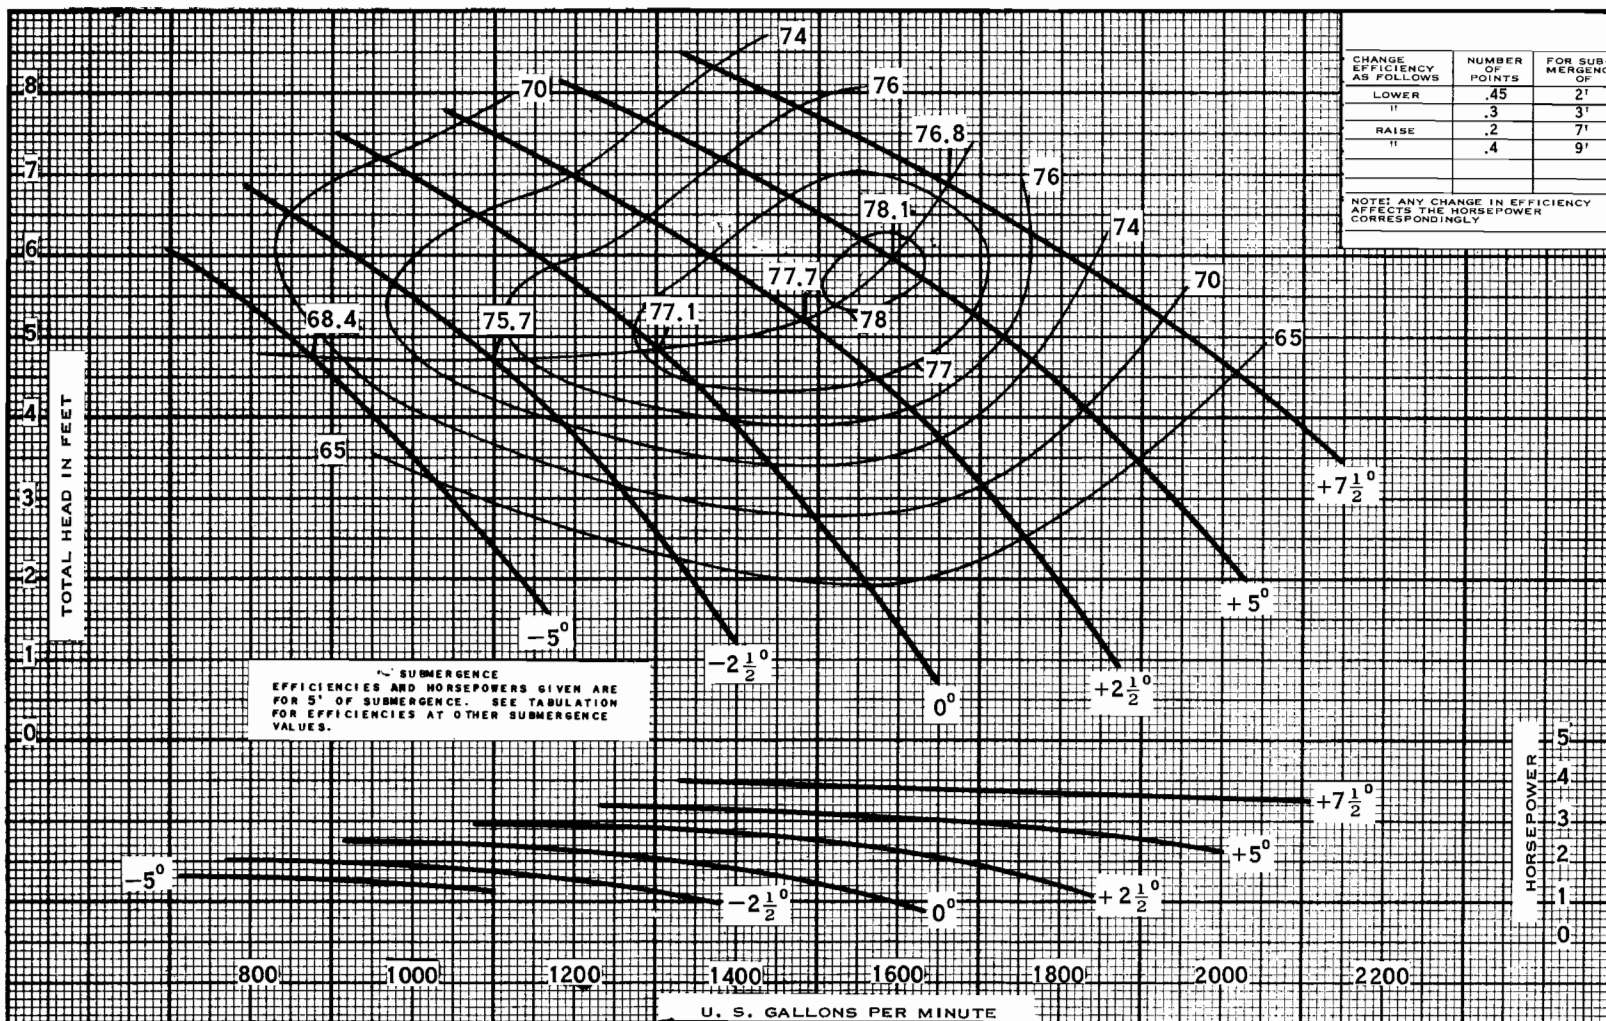

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUBMERGENCE OF
LOWER	.45	2'
"	.3	3'
RAISE	.2	7'
"	.4	9'

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

- Proper sump configuration
- Proper submergence
- Fluid free of gas, air & abrasives
- Proper lateral setting of impeller

GUARANTEED

☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP



LABORATORY PERFORMANCE

SIZE 12 PL

RPM 1160

CURVE NUMBER V4195A

DESCRIPTION: Hydro-Foil Pump with: Bowl T83864 ; Propeller T84483 -

Elbow ☐ above ☐ below base dia with x inner column

Driven _____

PEERLESS

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____