


CHANGE EFFICIENCY FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	2	1
"	1	2

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

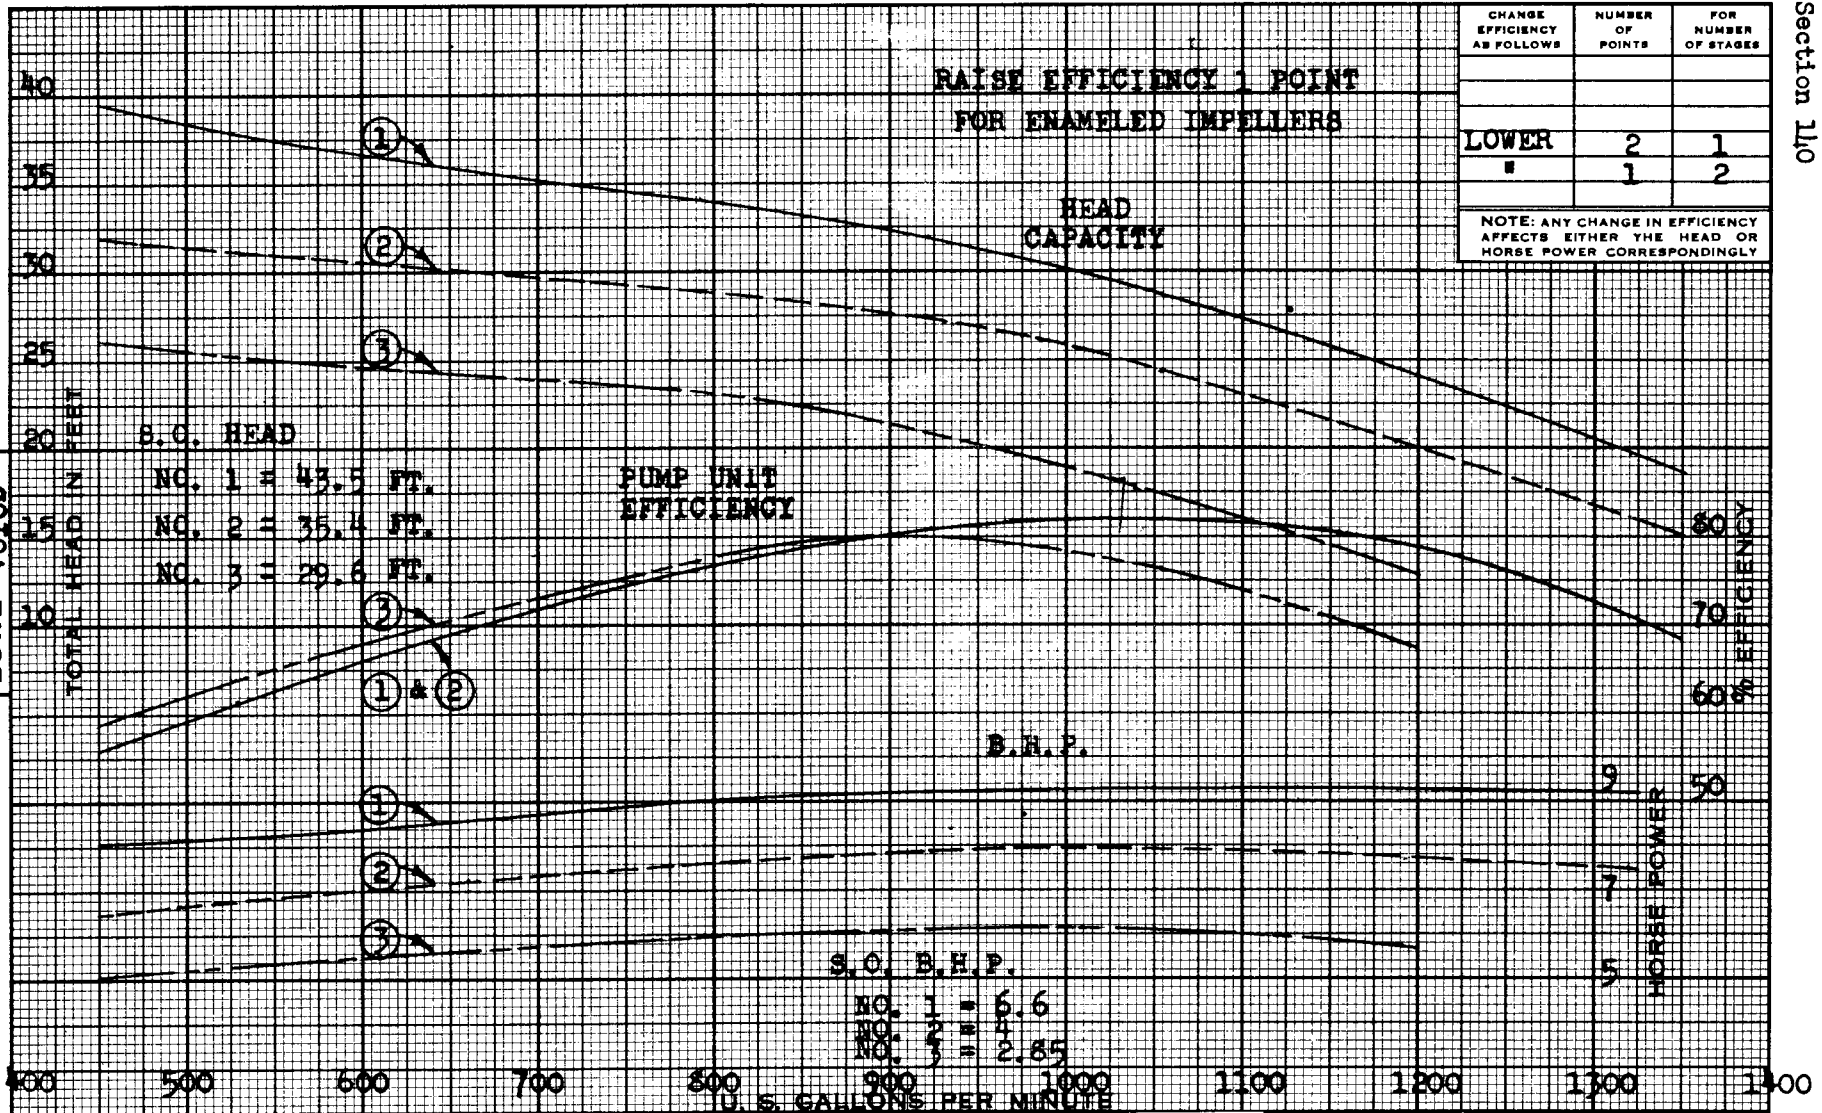

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	PEERLESS PUMP DIVISION	PERFORMANCE PER STAGE
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRAISIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	1	V619C	10-1/8"	4995	FOOD MACHINERY CORPORATION LOS ANGELES 31, CALIF.	14"MA
	2	V619C	9-5/8"	20159		1160
	3	V619C	9-1/8"	20203		

DEEP WELL TURBINE PUMP

R. P. M.

SHEET NO. R-1309

PRINTED IN U. S. A.