

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED

- ☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY

GPM

TOTAL DYNAMIC HEAD

FT

EFFICIENCY

BRAKE HORSEPOWER

BHP

FMC
Pump Division

LABORATORY PERFORMANCE

SIZE

16 PL

RPM


1160

CURVE NUMBER

V 4132A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.4	3'
AS SHOWN	---	5'
RAISE	0.2	6'
"	0.3	7'
"	0.5	8'
"	0.6	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

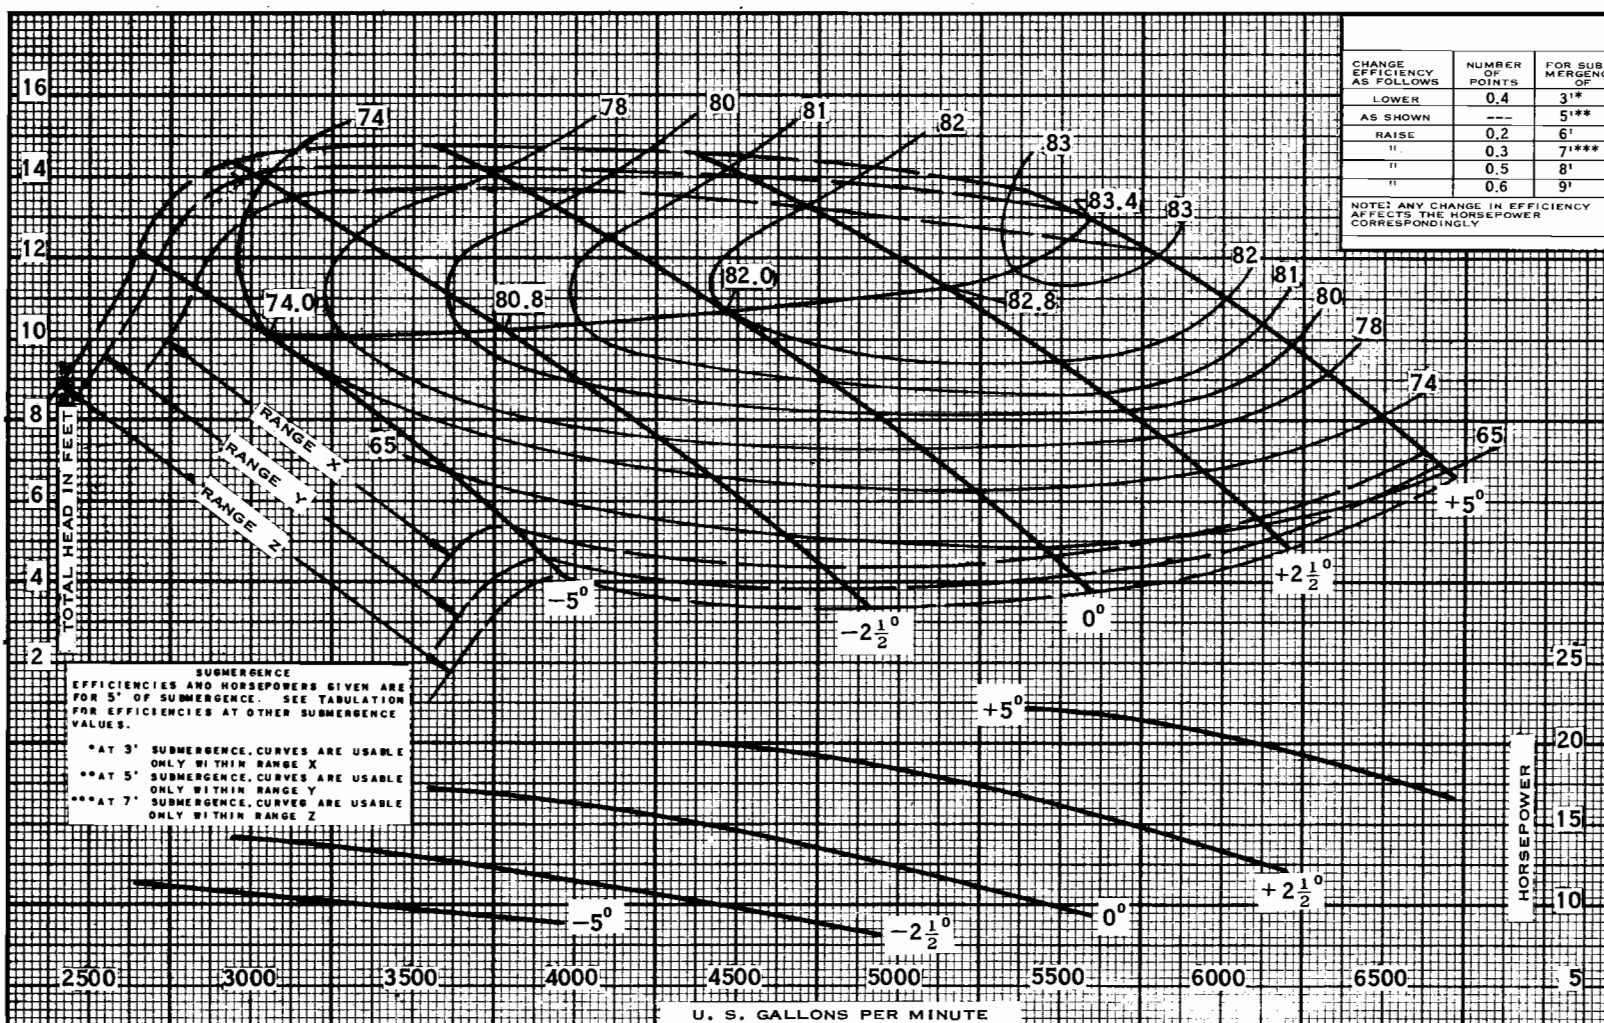

DESCRIPTION: Hydro-Foil Pump with: Bowl **T 83760** ; Propeller **T 84393**

Elbow ☐ above ☐ below base dia with x inner column

Driver:

PEERLESS

Customer

Item

Peerless Ref. No.

Pump No.