


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	8	1
"	7	2
"	5	4
"	3	5
"	1	6

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

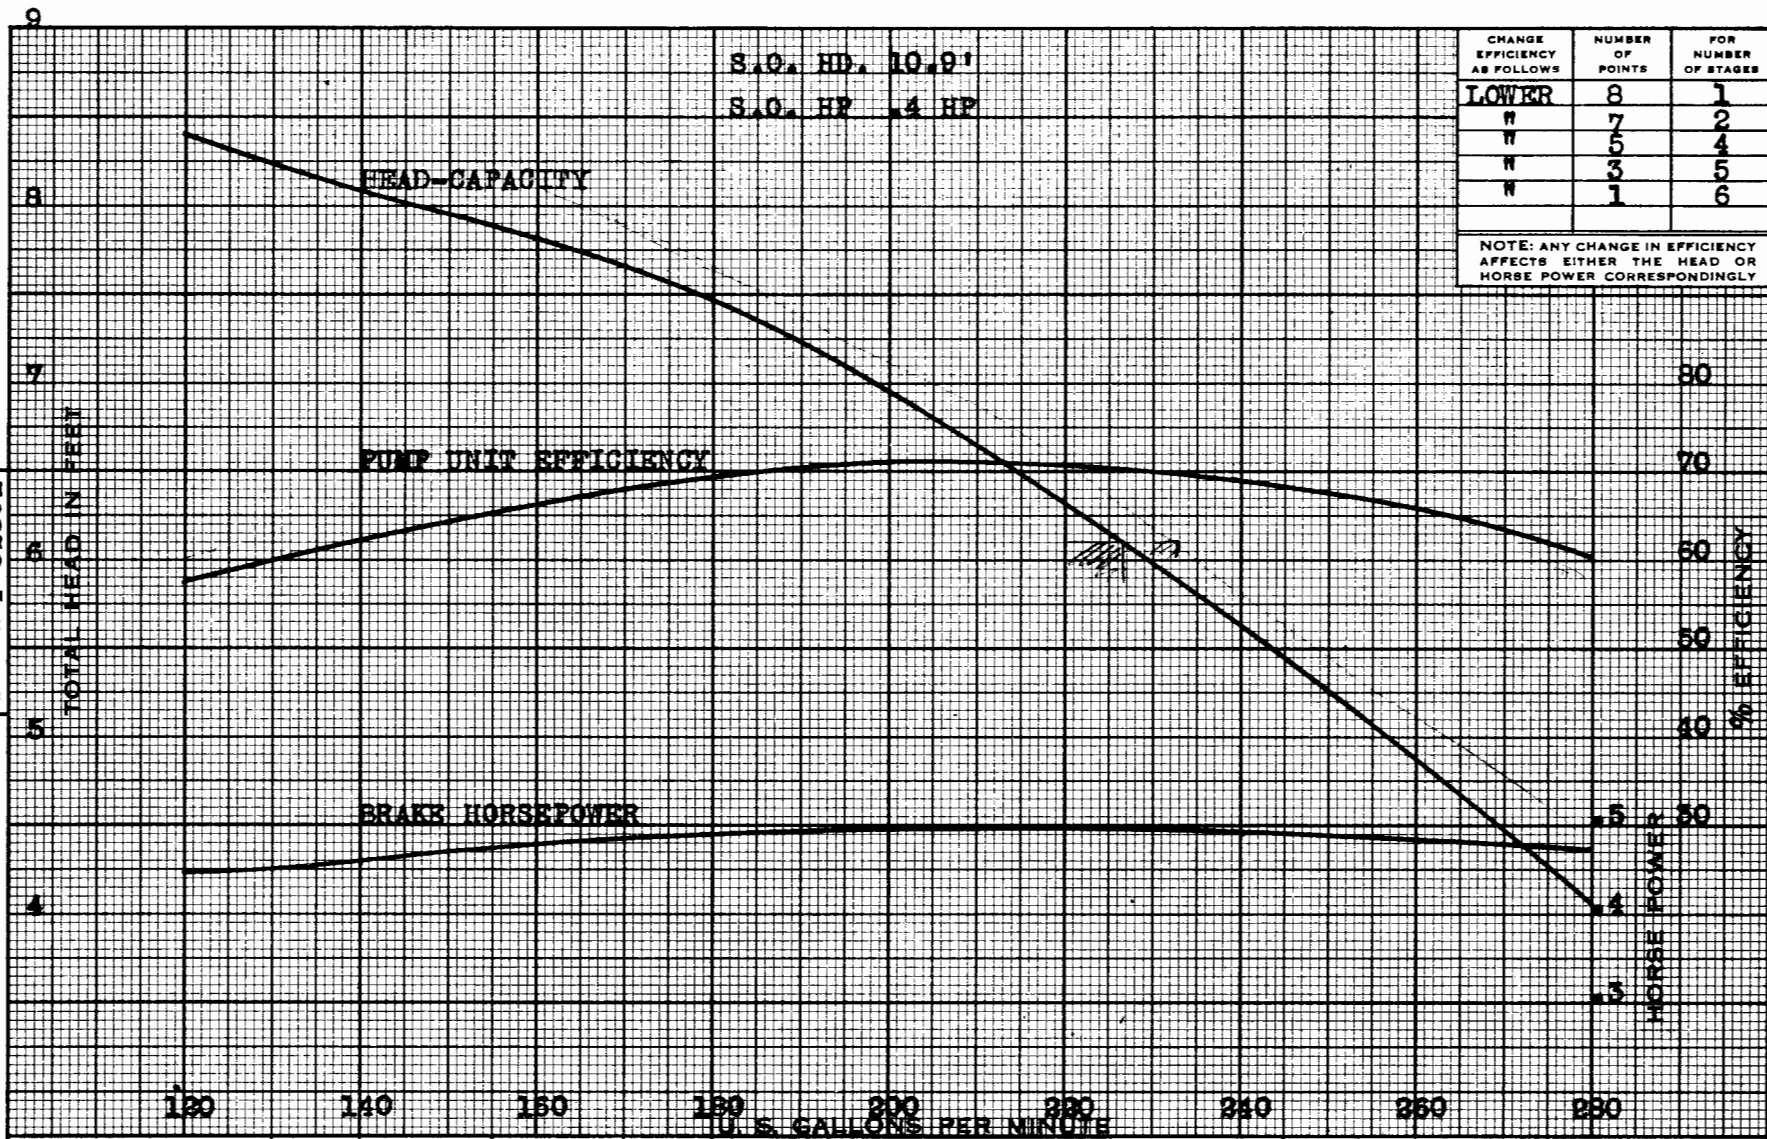

HYDRAULIC PERFORMANCE GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON- GASEOUS WATER FREE FROM AB- RASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
	1	T-82805	4 1/2" 9"	21190
	2			
	3			

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE
DEEP WELL
TURBINE PUMP

7" HX

1160

R. P. M.

SHEET NO. R-1463