


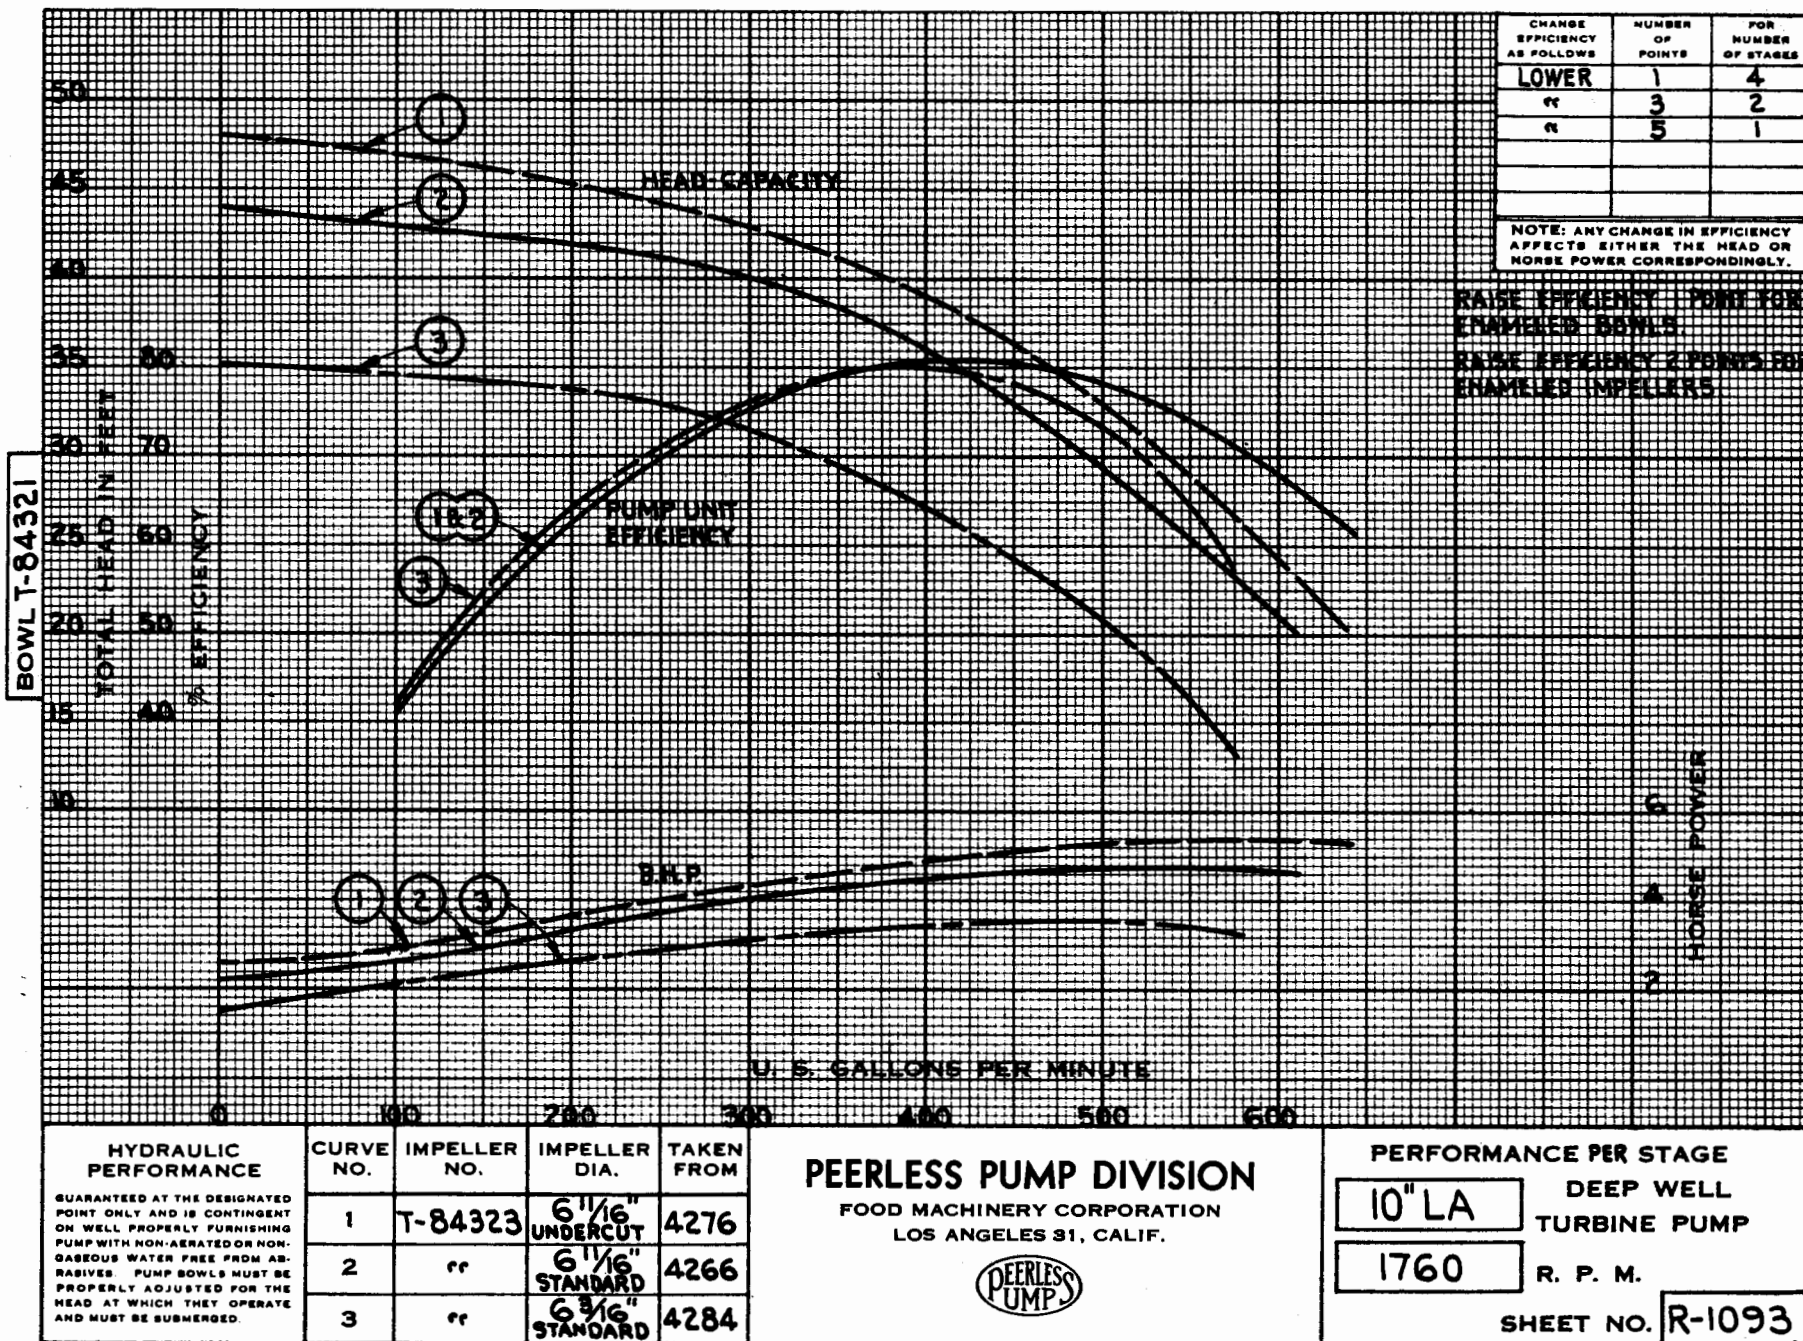

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	1	4
	3	2
	5	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

BOWL T84321 - F

TOTAL HEAD IN FEET


NPSH REQUIRED IN FEET

NPSH

B.H.P.

HORSE POWER

Head Capacity

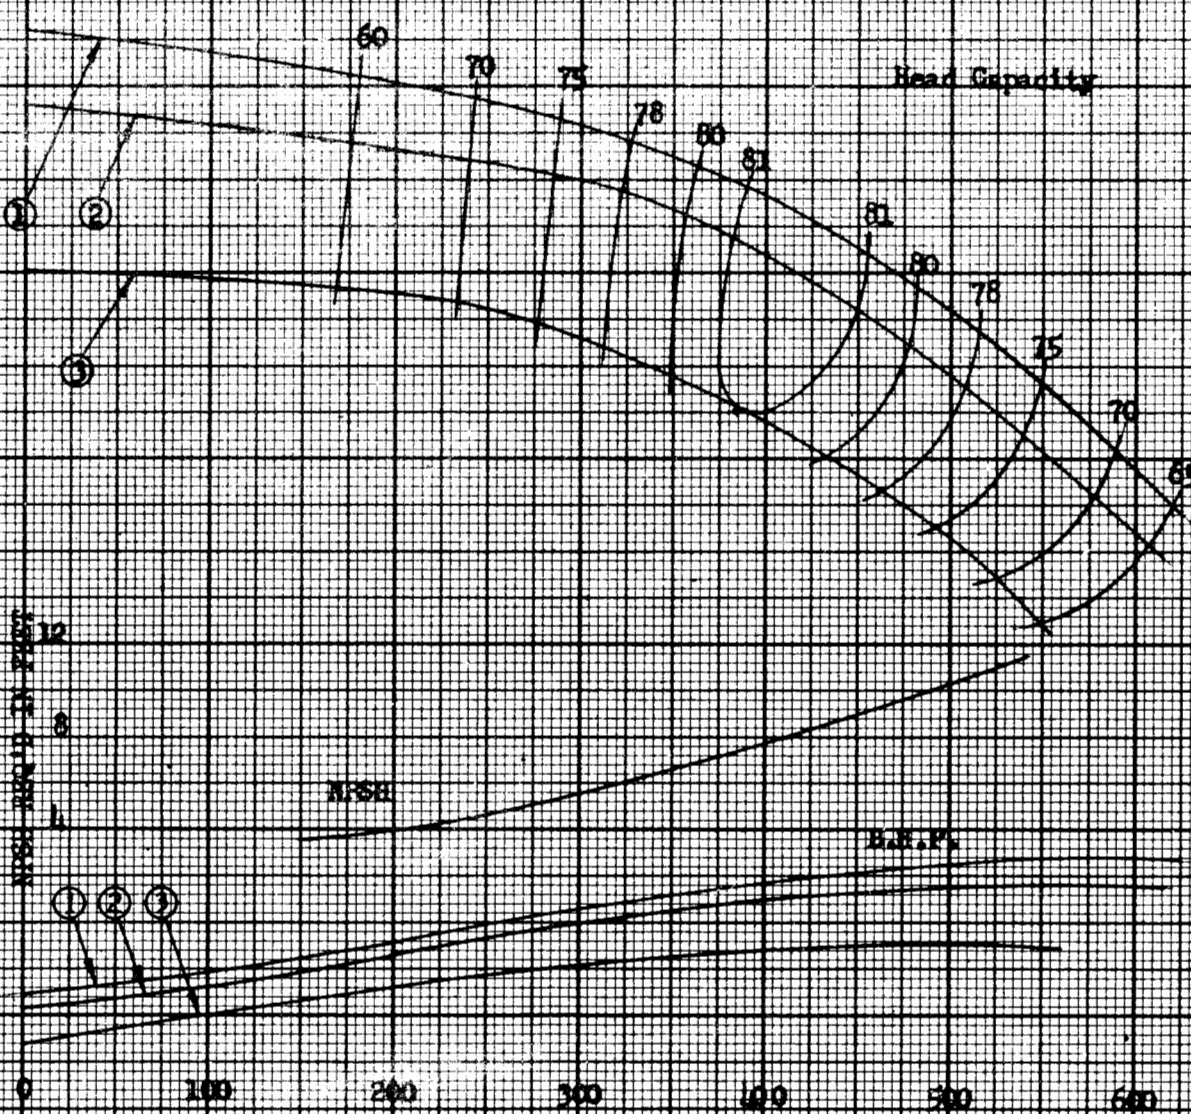

U. S. GALLONS PER MINUTE

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY.

Efficiency must be reduced for bronze & special material bowls - See Application Section

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T84323	6-11/16 Undercut	
2	T84323	6-11/16 Standard	27497
3	T84323	6-3/16	

PEERLESS PUMP DIVISION

FOOD MACHINERY AND CHEMICAL CORPORATION

LOS ANGELES 31, CALIFORNIA



PERFORMANCE PER STAGE

10 LA

1760

R. P. M.

SHEET NO. 2812569

