


| CHANGE<br>EFFICIENCY<br>AS FOLLOWS                                                           | NUMBER<br>OF<br>POINTS | FOR<br>NUMBER<br>OF STAGES |
|----------------------------------------------------------------------------------------------|------------------------|----------------------------|
| RAISE                                                                                        | 1                      | 8                          |
| LOWER                                                                                        | 1                      | 4                          |
|                                                                                              |                        |                            |
|                                                                                              |                        |                            |
| NOTE: ANY CHANGE IN EFFICIENCY<br>AFFECTS EITHER THE HEAD OR<br>HORSE POWER CORRESPONDINGLY. |                        |                            |

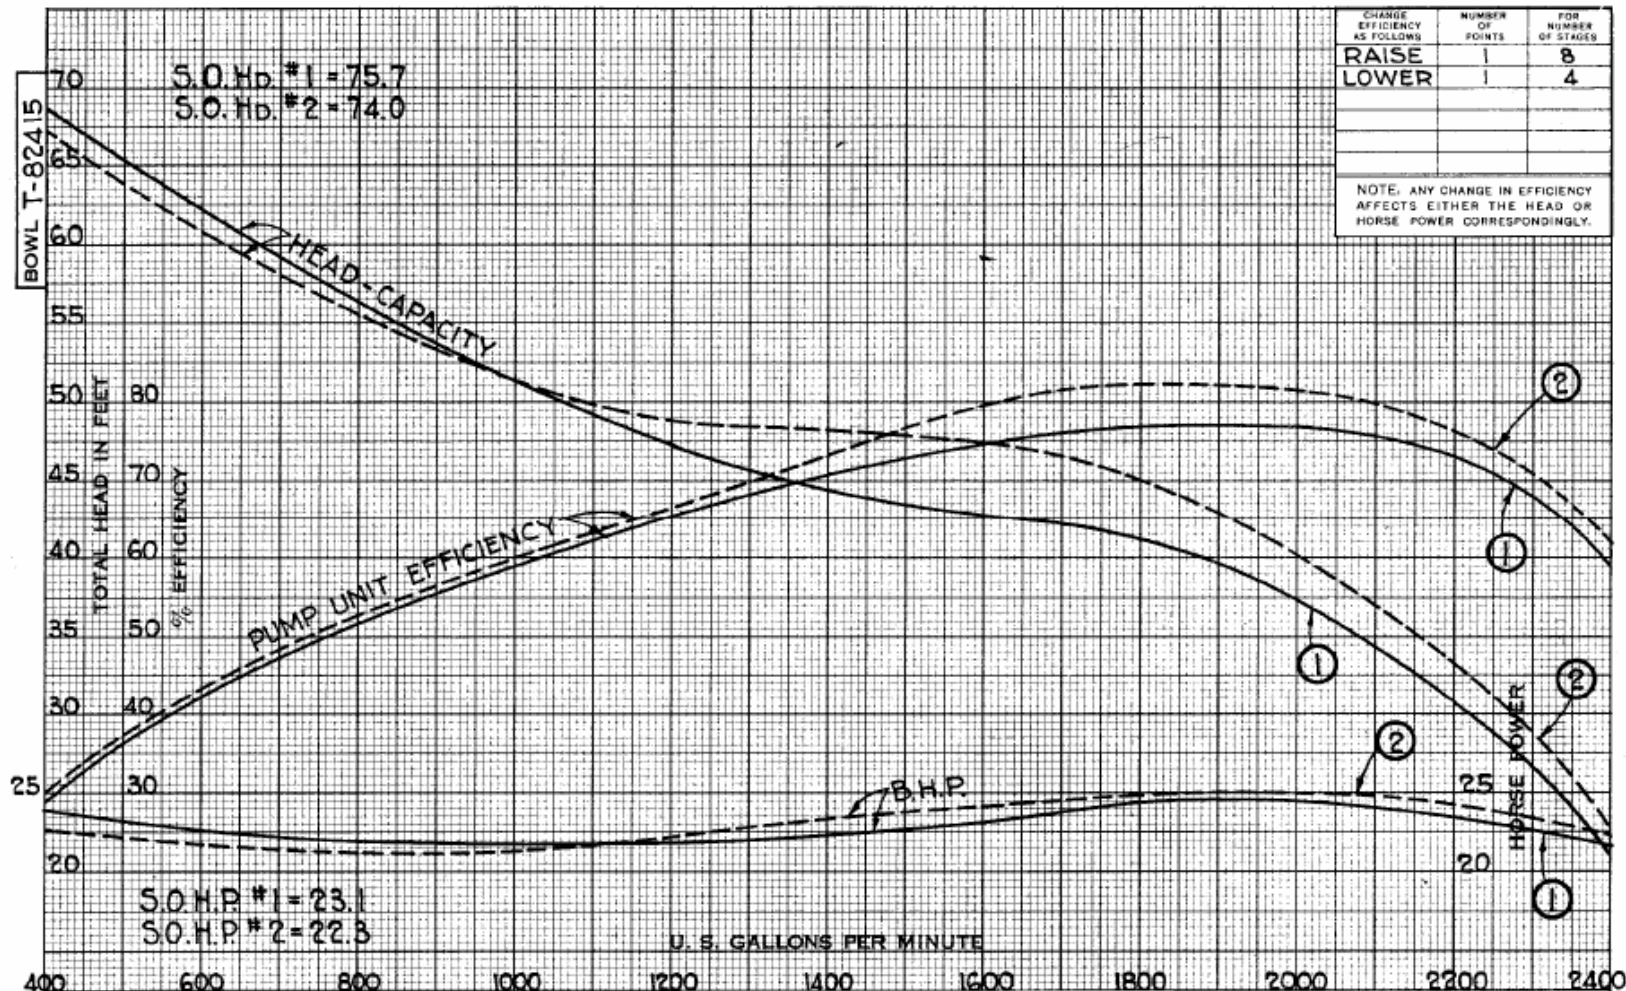

**HYDRAULIC PERFORMANCE**  
CONTINGENT ON WELL  
PROPERLY FURNISHING  
PUMP WITH THE AMOUNT  
OF NON-AERATED OR  
NON-GASEOUS WATER  
FREE FROM DETRITUS  
AT ANY HEAD ON  
THIS CURVE.

| CURVE<br>NO. | IMPELLER<br>NO. | IMPELLER<br>DIA.                      | TAKEN<br>FROM |
|--------------|-----------------|---------------------------------------|---------------|
| 1            | T-8241G         | 7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ " | T-2514        |
| 2            | T-8241GE        | 7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ " | T-2526        |
| 3            |                 |                                       |               |

### PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION  
LOS ANGELES 31, CALIF.



### PERFORMANCE PER STAGE

12" HXA

DEEP WELL  
TURBINE PUMP

1760

R. P. M.

SHEET NO. R-460A

PRINTED IN U.S.A.