


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	8
LOWER	1	4
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.		

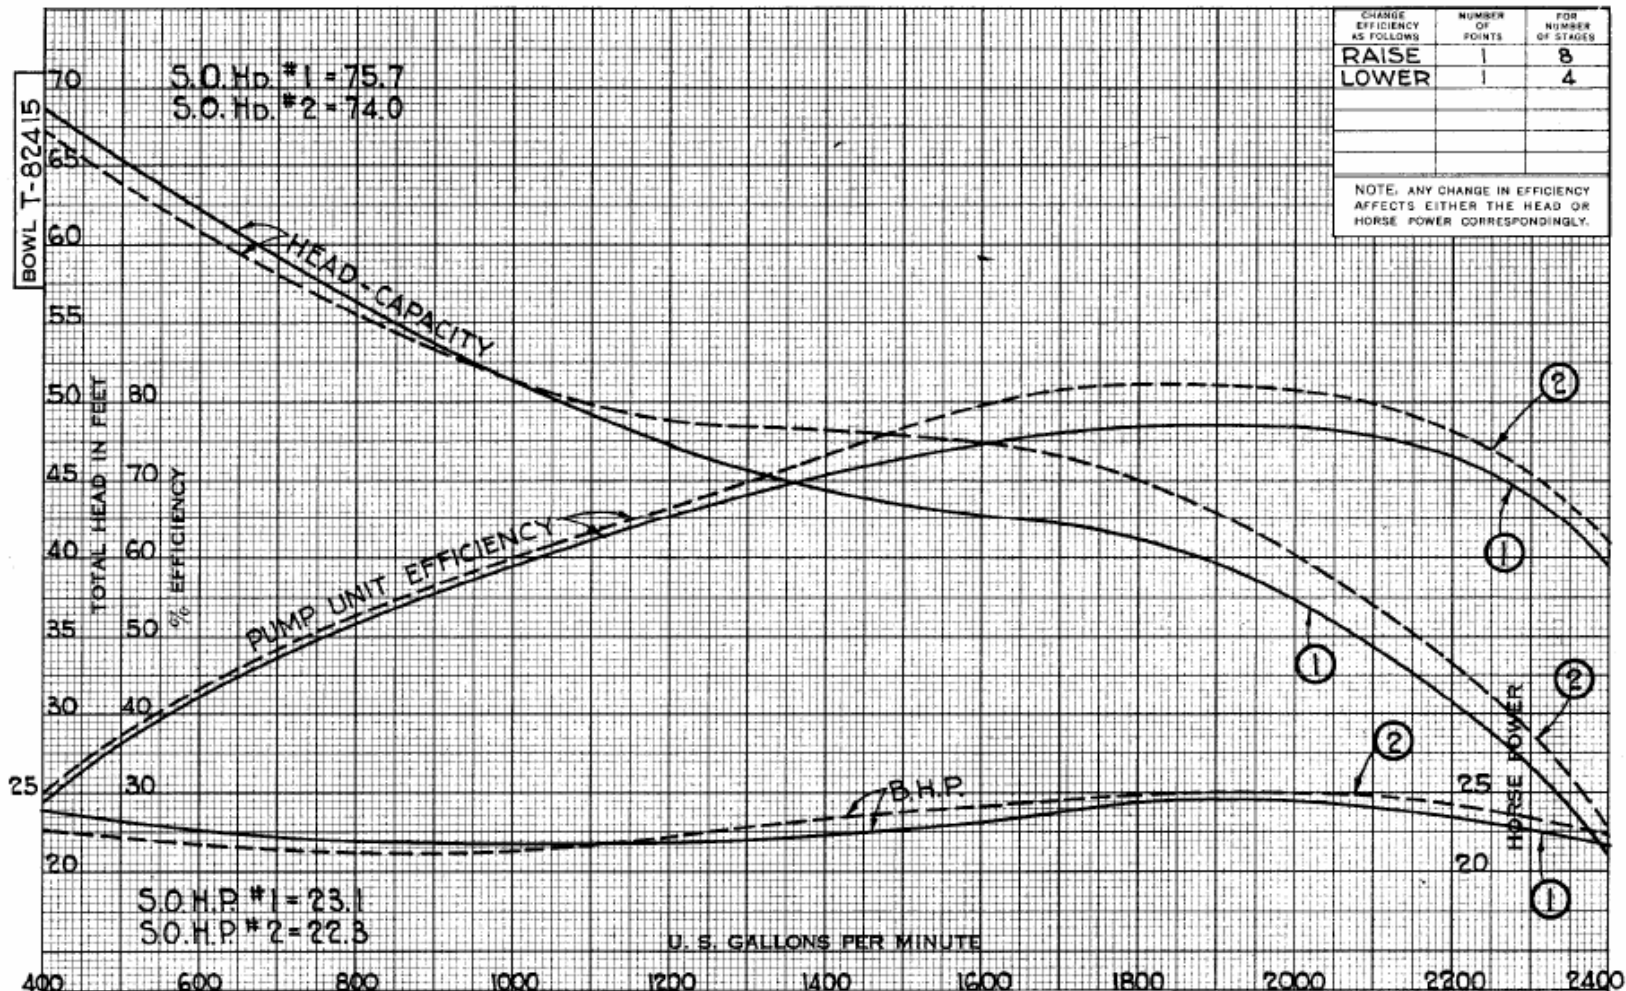

HYDRAULIC PERFORMANCE
CONTINGENT ON WELL
PROPERLY FURNISHING
PUMP WITH THE AMOUNT
OF NON-AERATED OR
NON-GASEOUS WATER
FREE FROM DETRITUS
AT ANY HEAD ON
THIS CURVE.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-8241G	7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ "	T-2514
2	T-8241GE	7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ "	T-2526
3			

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE

12" HXA

DEEP WELL
TURBINE PUMP

1760

R. P. M.

SHEET NO. R-460A

PRINTED IN U.S.A.