


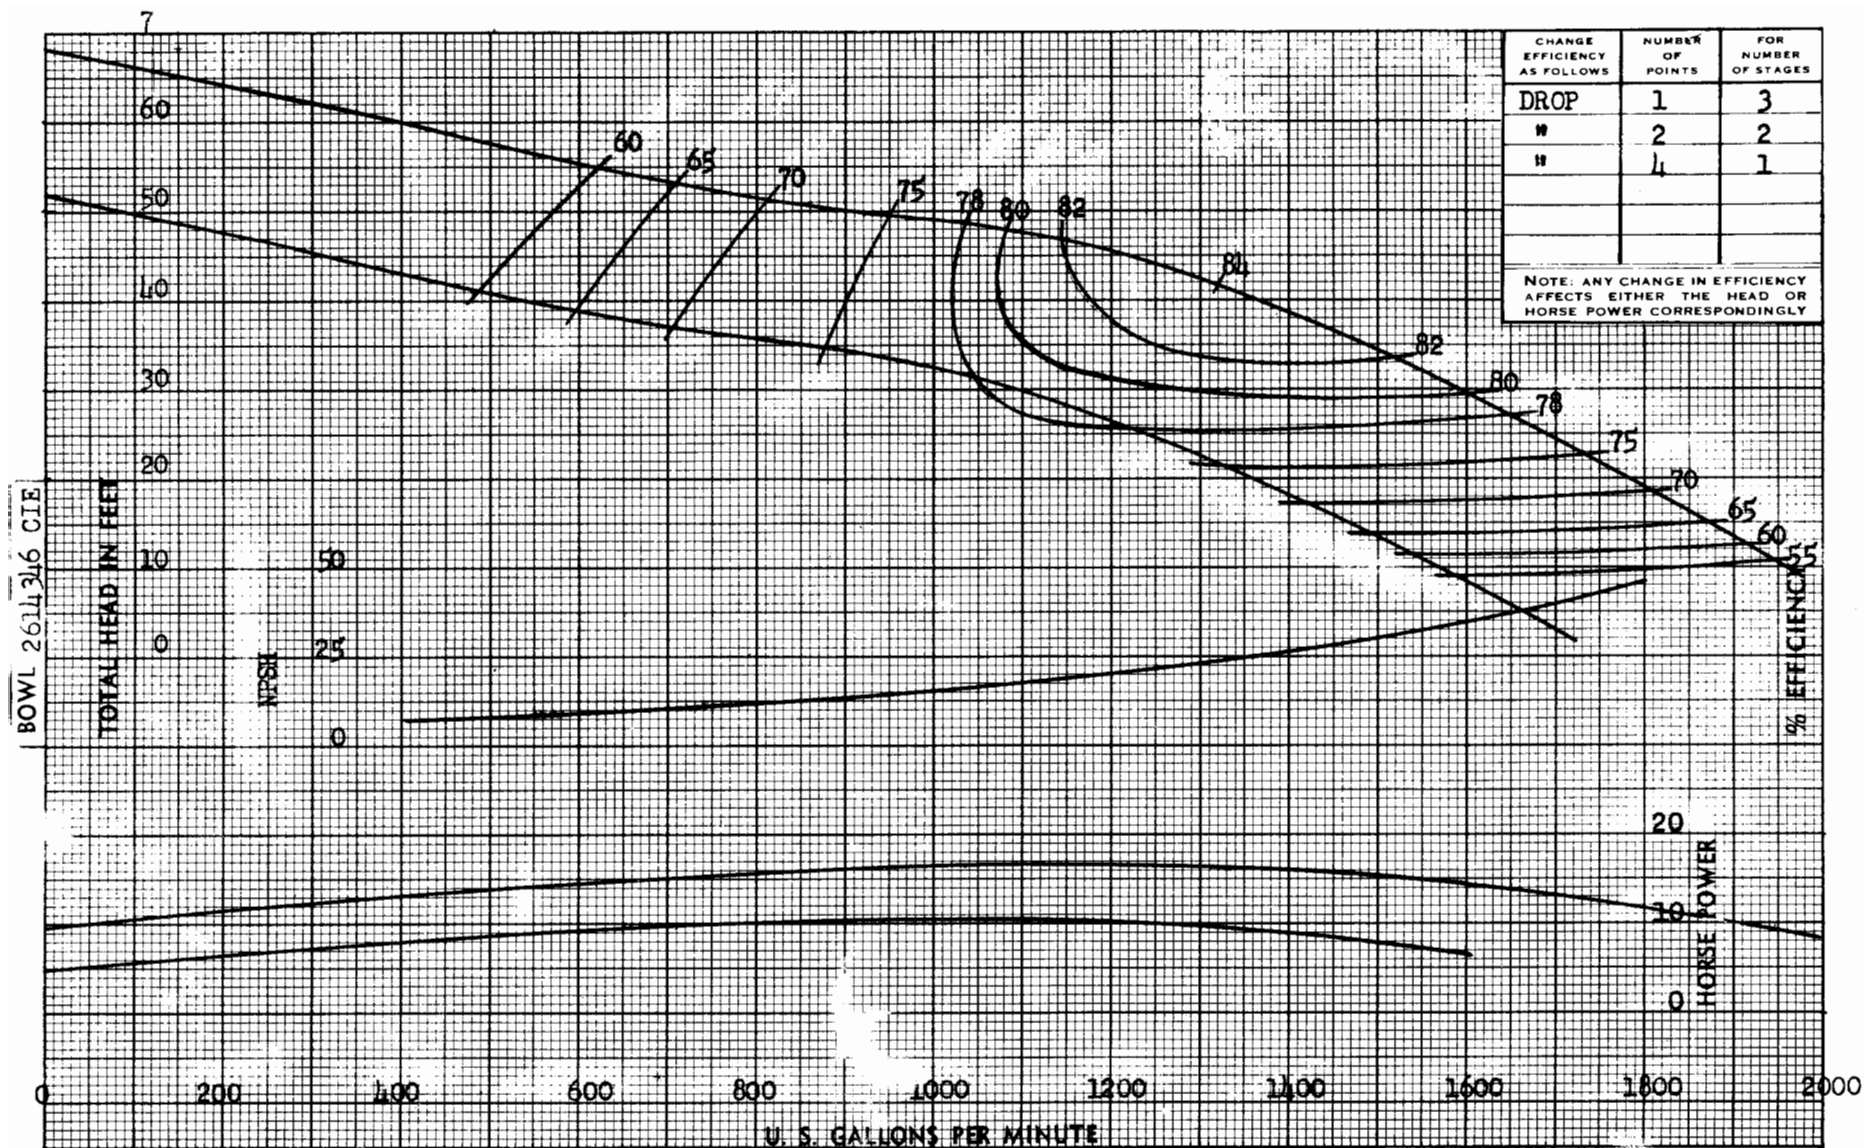

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
DROP	1	3
"	2	2
"	4	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

**HYDRAULIC
PERFORMANCE**

GUARANTEED AT THE DESIGNATED
POINT ONLY AND IS CONTINGENT
ON WELL PROPERLY FURNISHING
PUMP WITH NON-AERATED OR NON-
GASEOUS WATER FREE FROM AB-
RASIVES. PUMP BOWLS MUST BE
PROPERLY ADJUSTED FOR THE
HEAD AT WHICH THEY OPERATE
AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	2608379	7-27/32 x 8-15/16	
2	2608379	7-1/4 x 8-1/4	
3			



**PEERLESS
PUMP**

HYDRODYNAMICS
DIVISION

PERFORMANCE PER STAGE

12 HXB

DEEP WELL
TURBINE PUMP

1760

R. P. M.

SHEET NO. 2830574