


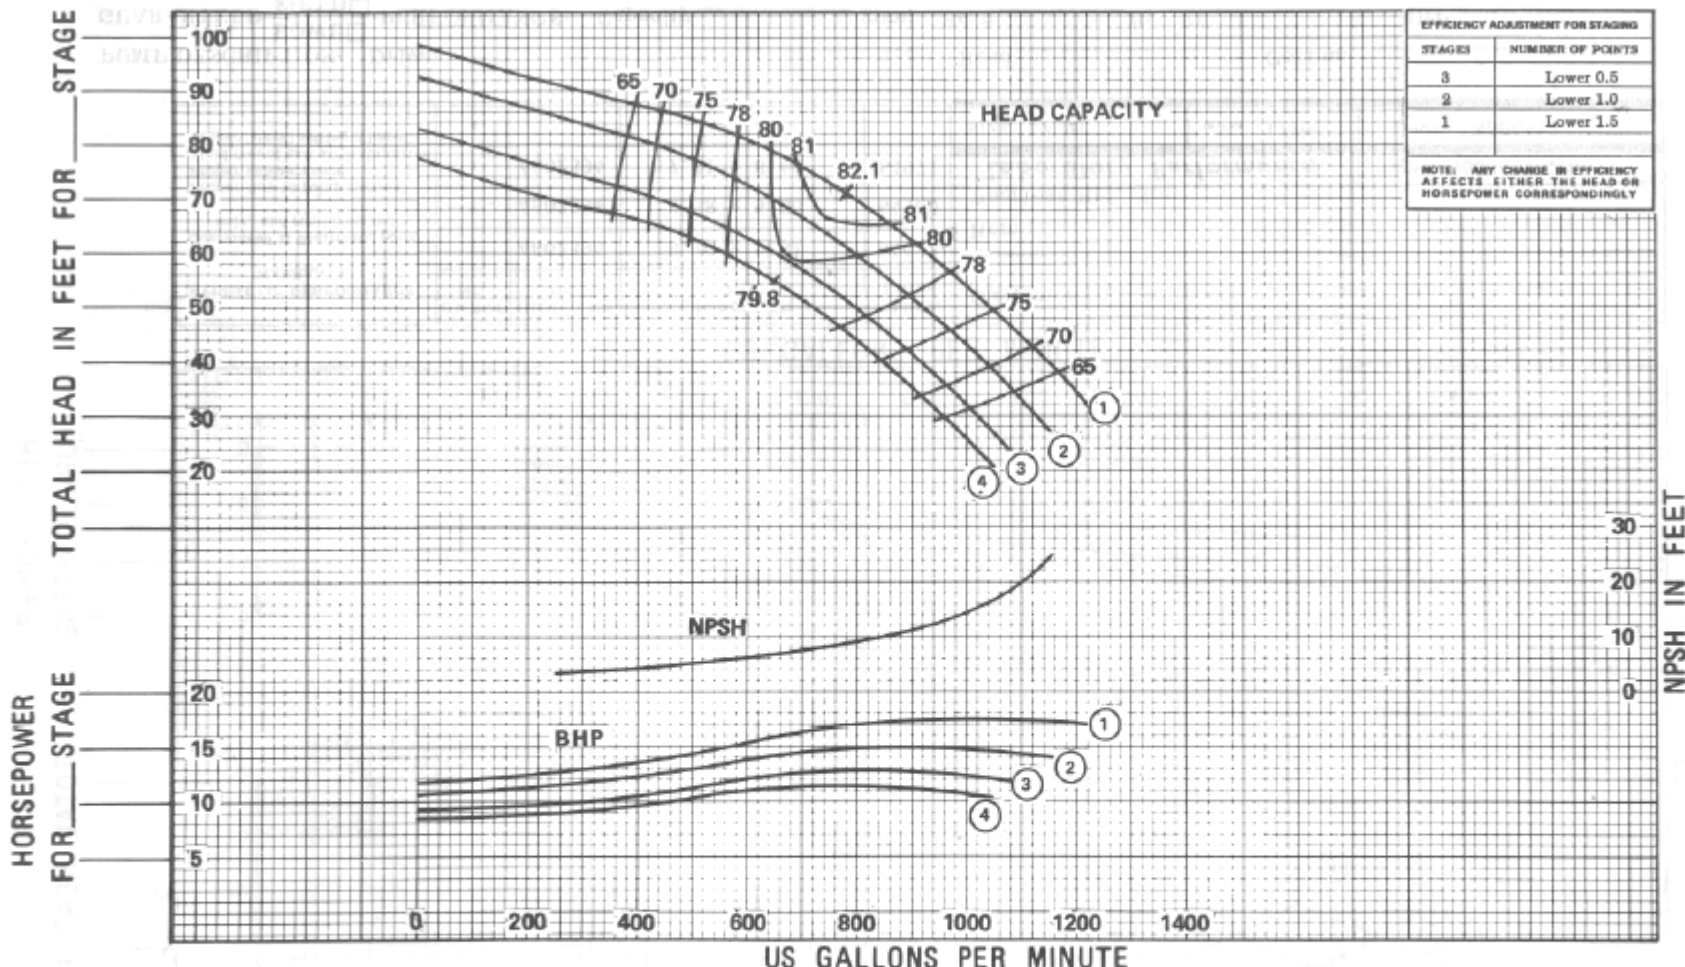

EFFICIENCY ADJUSTMENT FOR STAGING	
STAGES	NUMBER OF POINTS
3	Lower 0.5
2	Lower 1.0
1	Lower 1.5

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSEPOWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE WARRANTY Guaranteed at designated point only and contingent on: Proper flow to pump suction Proper submergence Fluid free of gas, air & abrasives Proper lateral setting of impeller	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____						
	1	2649365	8-15/16 x 9-23/32	56890	Item _____						
	2	2649365	8-5/8 x 9-7/16	57558	Peerless Ref. No: _____						
	3	2649365	8-1/4 x 9-5/32	57586	Laboratory Performance						
	4	2649365	7-7/8 x 8-29/32	57666	<table border="1"> <tr> <td>SIZE 12LD</td> <td>RPM 1760</td> <td>BOWL 2634907 CIE</td> </tr> <tr> <td></td> <td></td> <td>CURVE 4806198</td> </tr> </table>	SIZE 12LD	RPM 1760	BOWL 2634907 CIE			CURVE 4806198
SIZE 12LD	RPM 1760	BOWL 2634907 CIE									
		CURVE 4806198									

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED ☐ BOWL PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____

FIELD ☐