


BOWL T8L506-E

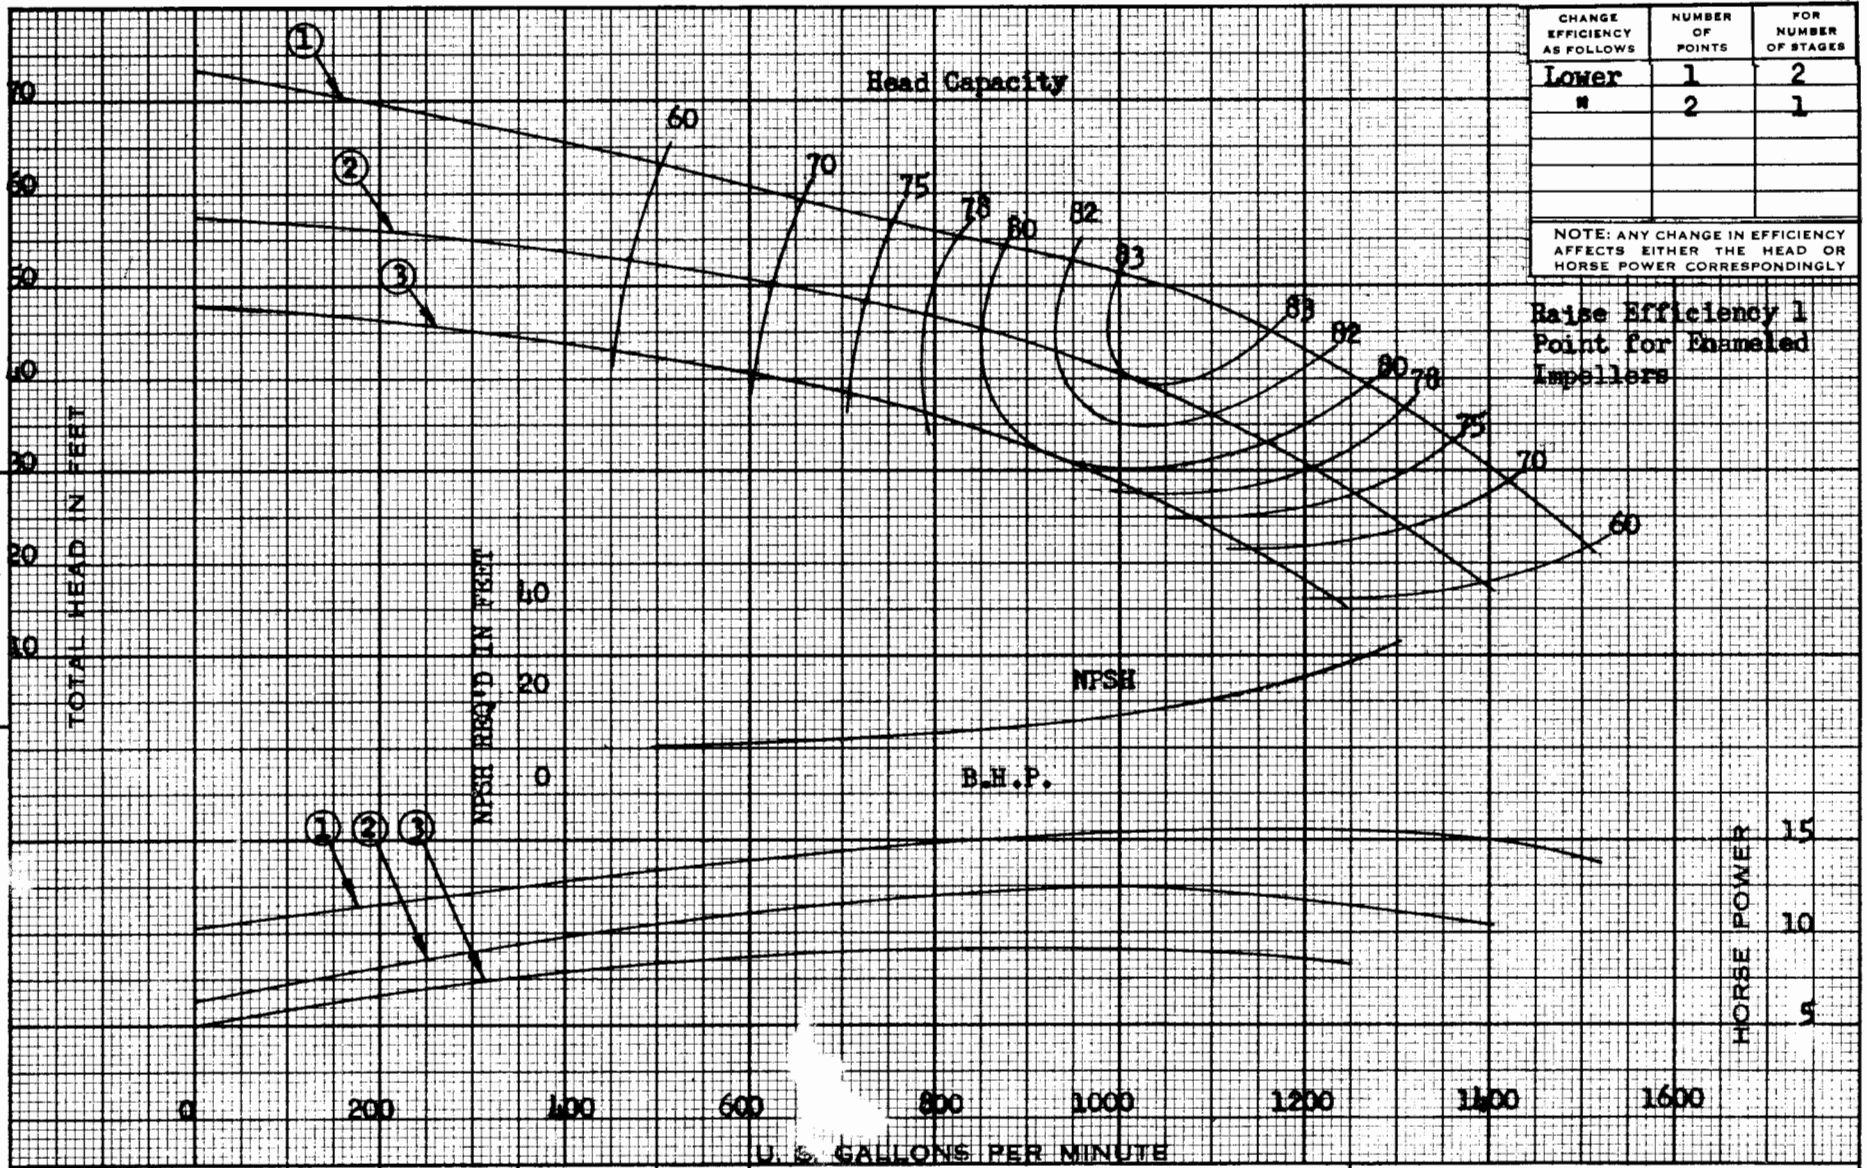

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	1	2
H	2	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

Raise Efficiency 1 Point for Enameled Impellers

HYDRAULIC PERFORMANCE GUARANTEED AT THE DESIGNATED POINT ONLY.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
Efficiency must be reduced for bronze & special material bowls - See Application Section	1	T8L528	8-11/16	4436
	2	T8L528	8-3/16	4437
	3	T8L528	7-11/16	4439

PEERLESS PUMP



HYDRODYNAMICS DIVISION

Los Angeles 31 • Indianapolis 8

PERFORMANCE PER STAGE

12 MA

1760

R. P. M.

SHEET NO. 2812193

