


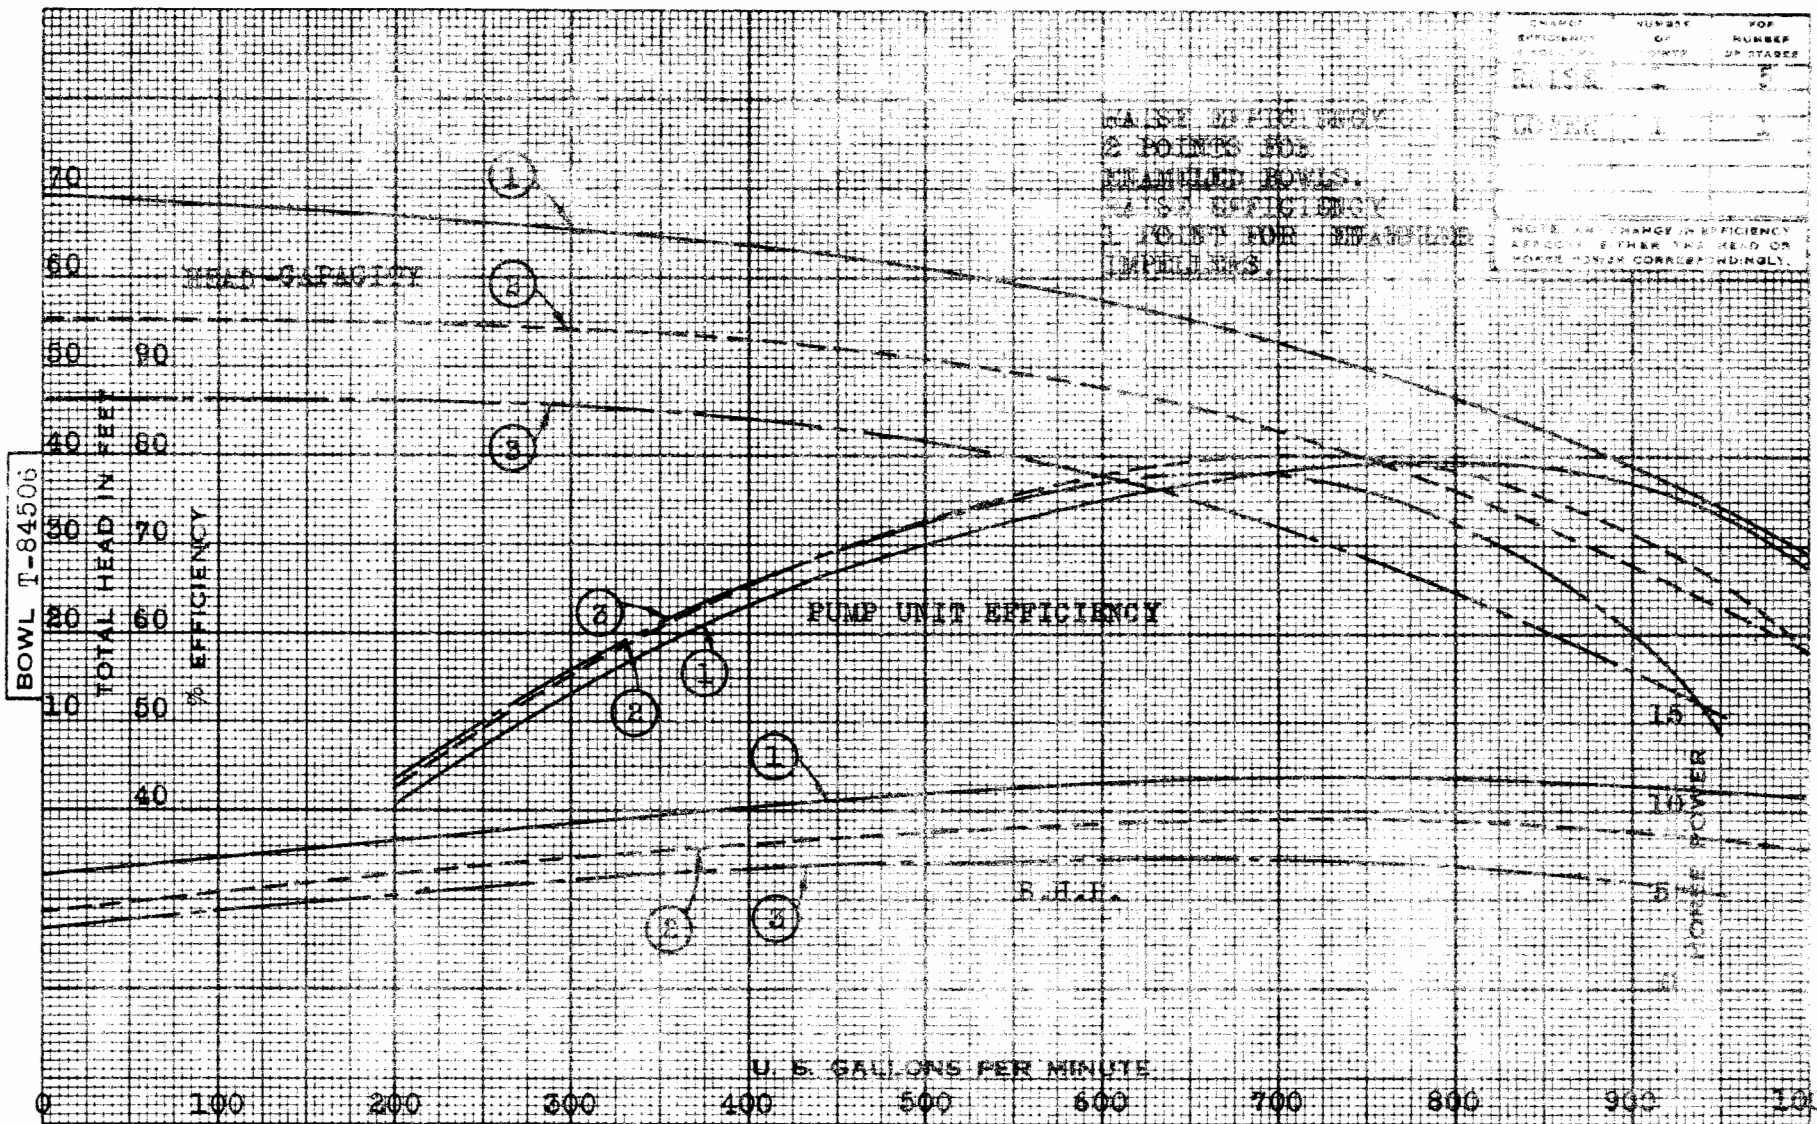

BOWL T-84506

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED	1	T-84531	8-11/16	4465
	2	"	8-3/16	4469
	3	"	7-11/16	4471

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE
12" MA
1760
R. P. M.
SHEET NO. R-1113