


BOWL V-3019-C C.I.E.

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1.5	7
"	2.5	6
"	3.5	5
"	4.0	4
"	5.0	3
"	6.0	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

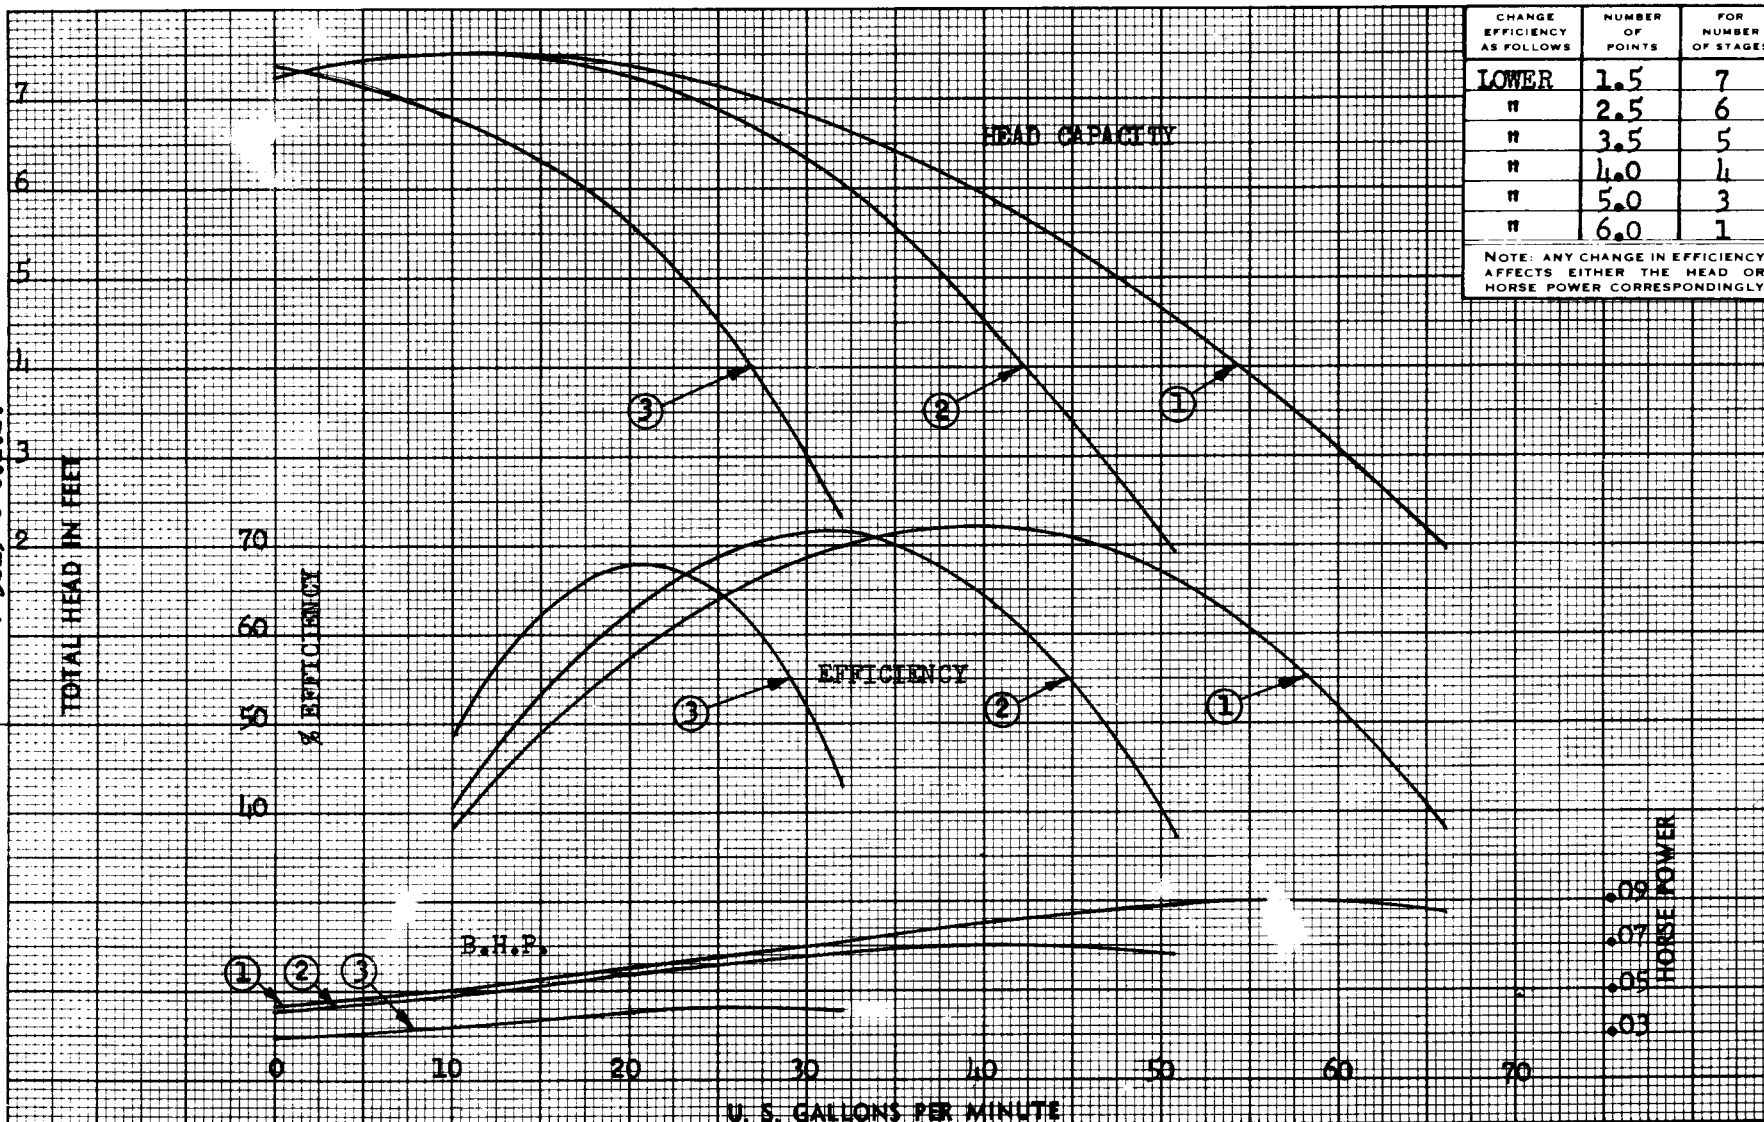

HYDRAULIC PERFORMANCE GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM AB-RASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	HYDRODYNAMICS DIVISION PEERLESS PUMP Los Angeles 31 • Indianapolis 8	PERFORMANCE PER STAGE DEEP WELL TURBINE PUMP R. P. M.		SHEET NO. 2840770
	1	2621671	3-9/64	36818		440		
	2	2621672	3-9/64	36819		1760		
	3	2621673	3-9/64	36934				