


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	5
"	2	2
"	4	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.		

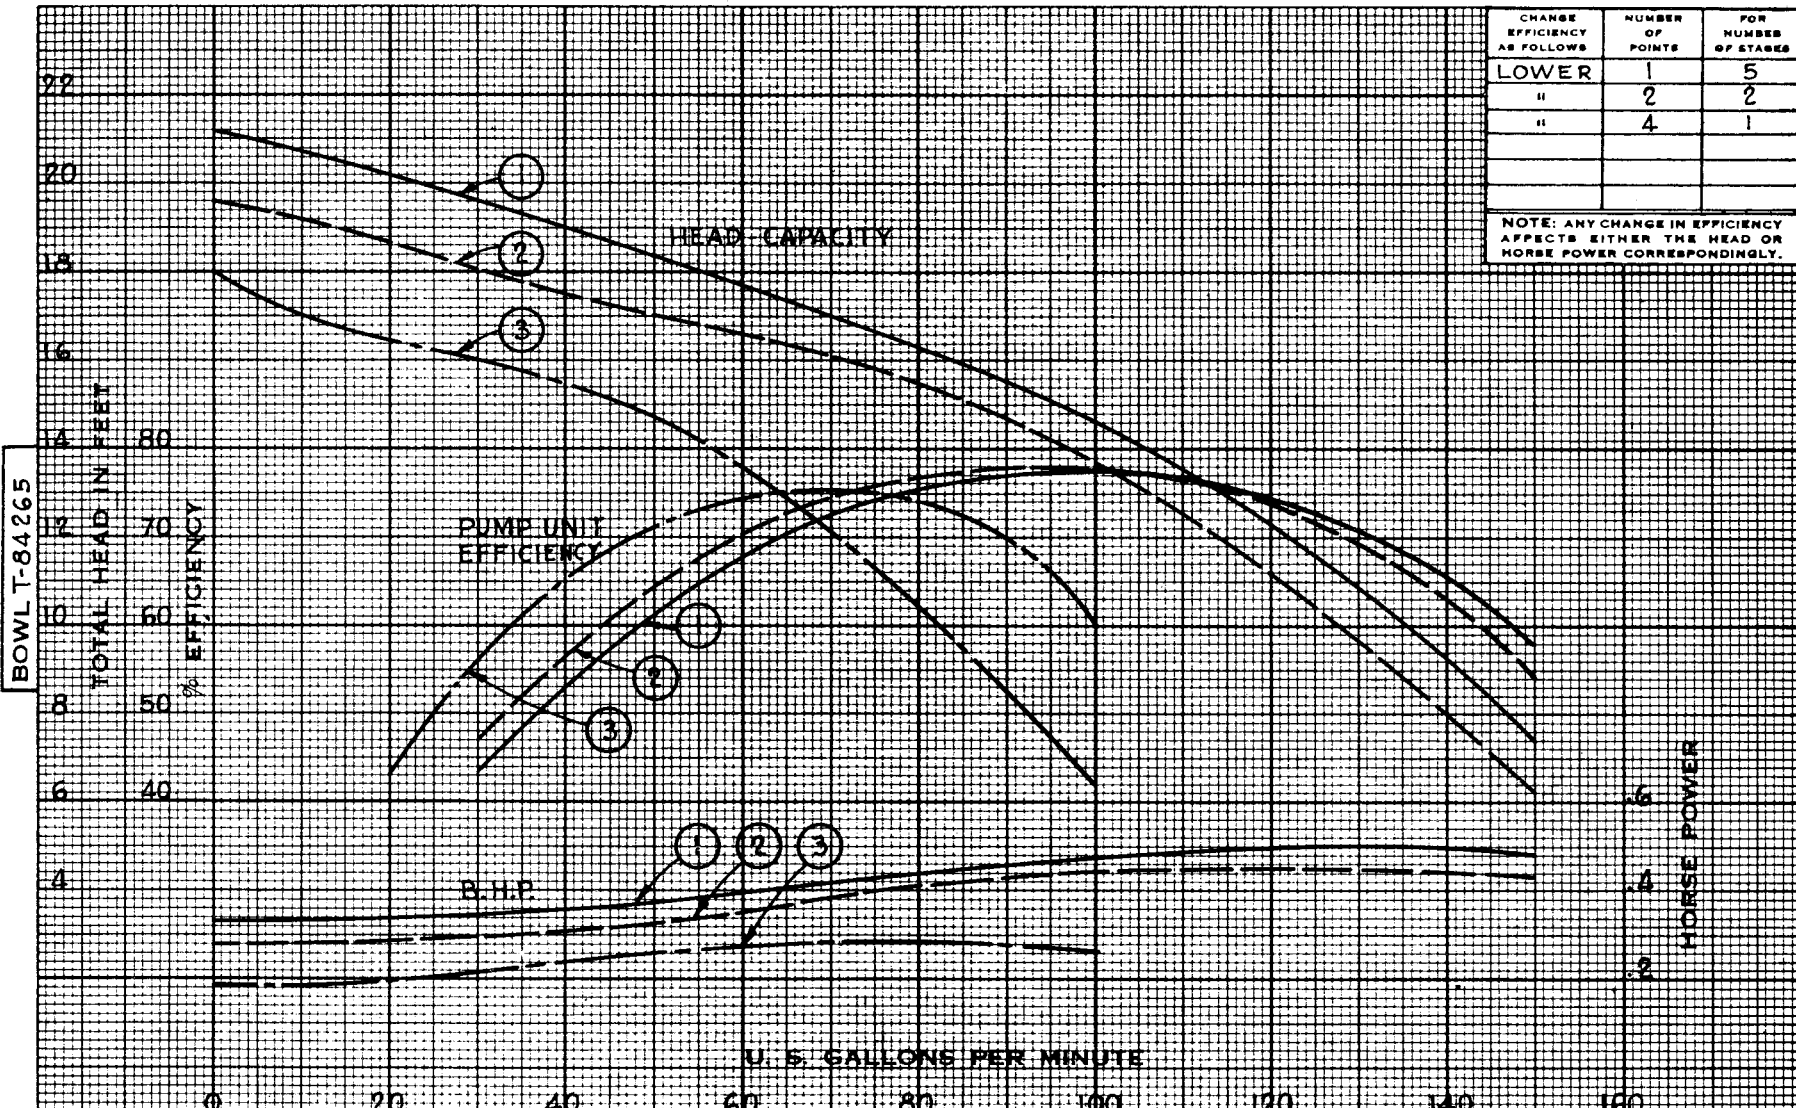

BOWL T-84265

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON- GASEOUS WATER FREE FROM AB- RASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED	1	T-84267	4 1/4" UNDERCUT	4200
	2	T-84267	4 1/4" STANDARD	4199
	3	T-84423	4 1/4" STANDARD	4238

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE	
6" LA	DEEP WELL
1760	TURBINE PUMP
	R. P. M.
SHEET NO. R-1073	