


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	1	5
"	2	2
"	4	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

BOWL T8L265E

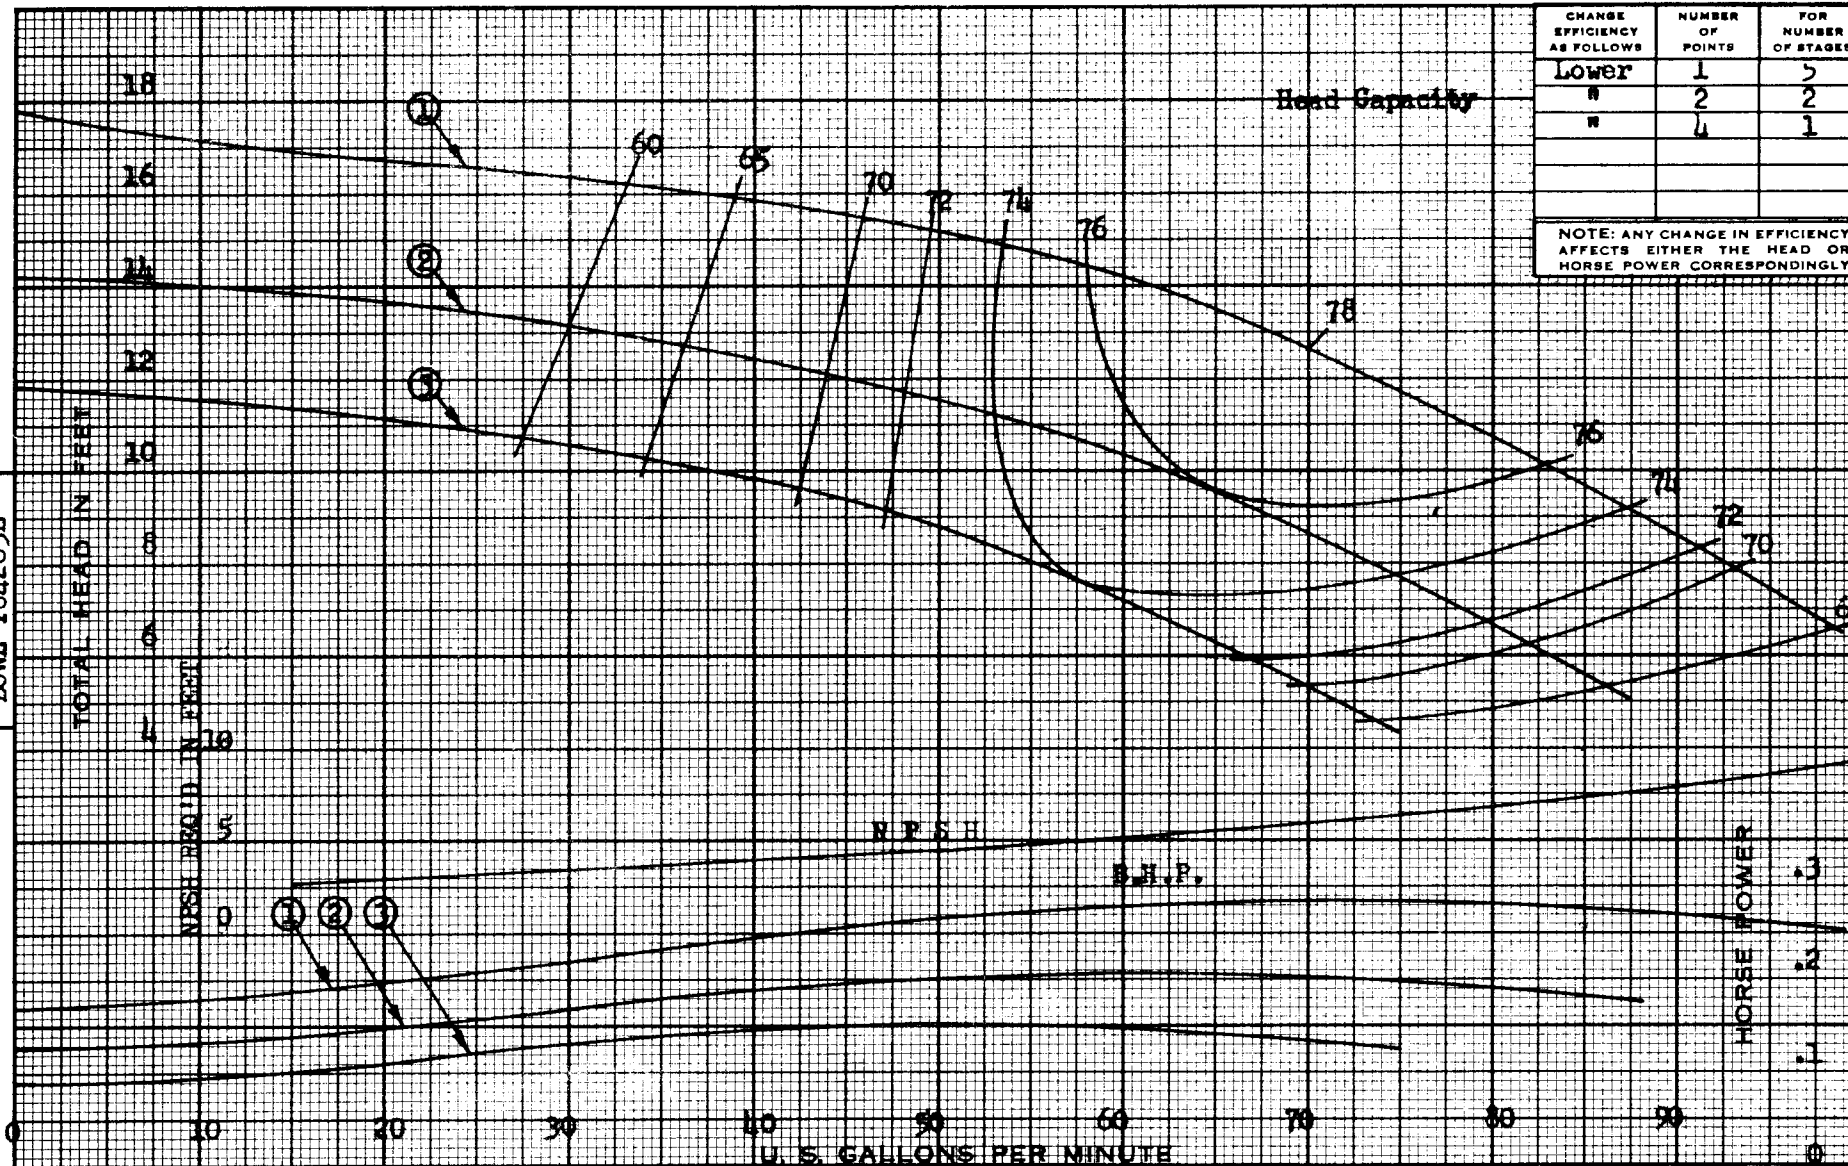


HYDRAULIC PERFORMANCE GUARANTEED AT THE DESIGNATED POINT ONLY.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
Efficiency must be reduced for bronze & special material bowls - See Appli- cation Section	1	T8L423	4-1/4	27691
	2	T8L423	4	24998
	3	T8L423	3-3/4	

PEERLESS PUMP DIVISION
 FOOD MACHINERY AND CHEMICAL
 CORPORATION
 LOS ANGELES 31, CALIFORNIA



PERFORMANCE PER STAGE	
6 LA	
1760	R. P. M.
SHEET NO.	2812036

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	5
"	2	2
"	4	1
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.		

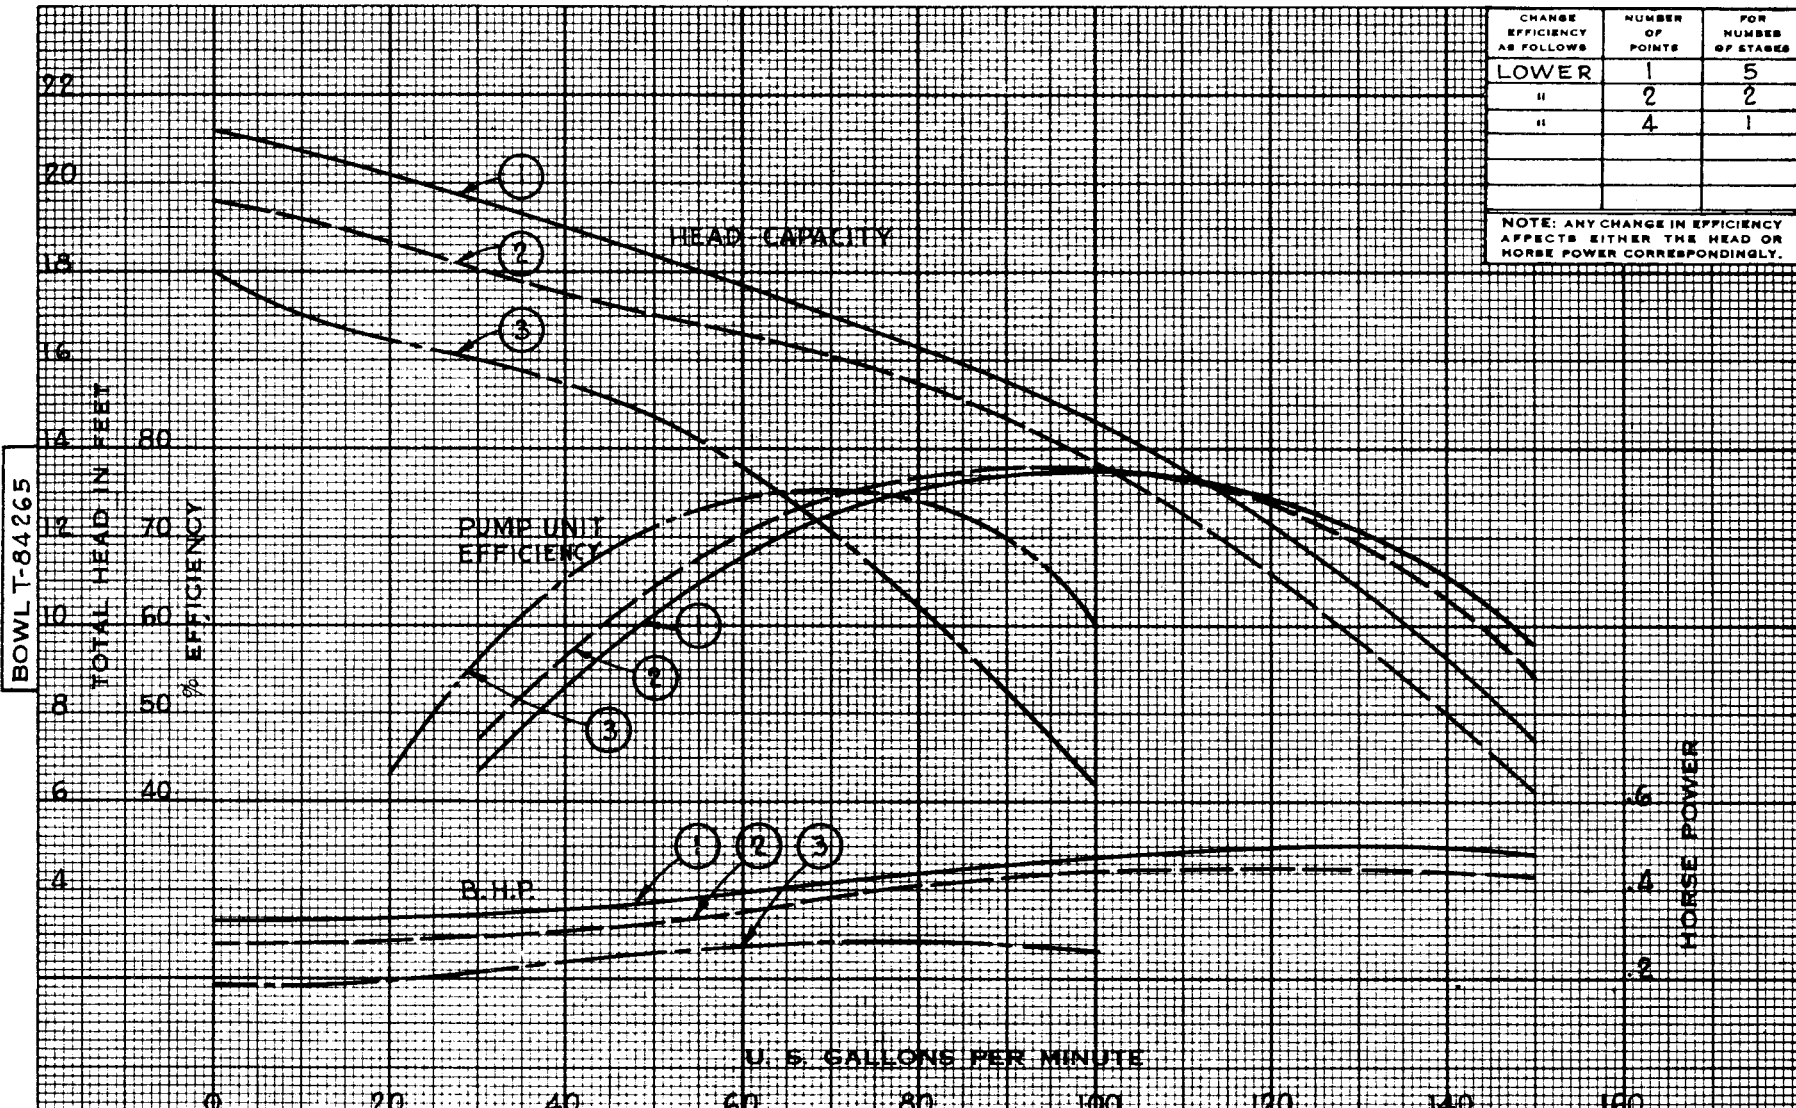

BOWL T-84265

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON- GASEOUS WATER FREE FROM AB- RASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED	1	T-84267	4 1/4" UNDERCUT	4200
	2	T-84267	4 1/4" STANDARD	4199
	3	T-84423	4 1/4" STANDARD	4238

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE	
6" LA	DEEP WELL TURBINE PUMP
1760	R. P. M.
SHEET NO. R-1073	