




HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRAISIVES PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	2616318	4-15/32	34385
2	2616318	4-5/16 x 4-15/32	37221
3	2616318	4-1/64 x 4-15/32	37324

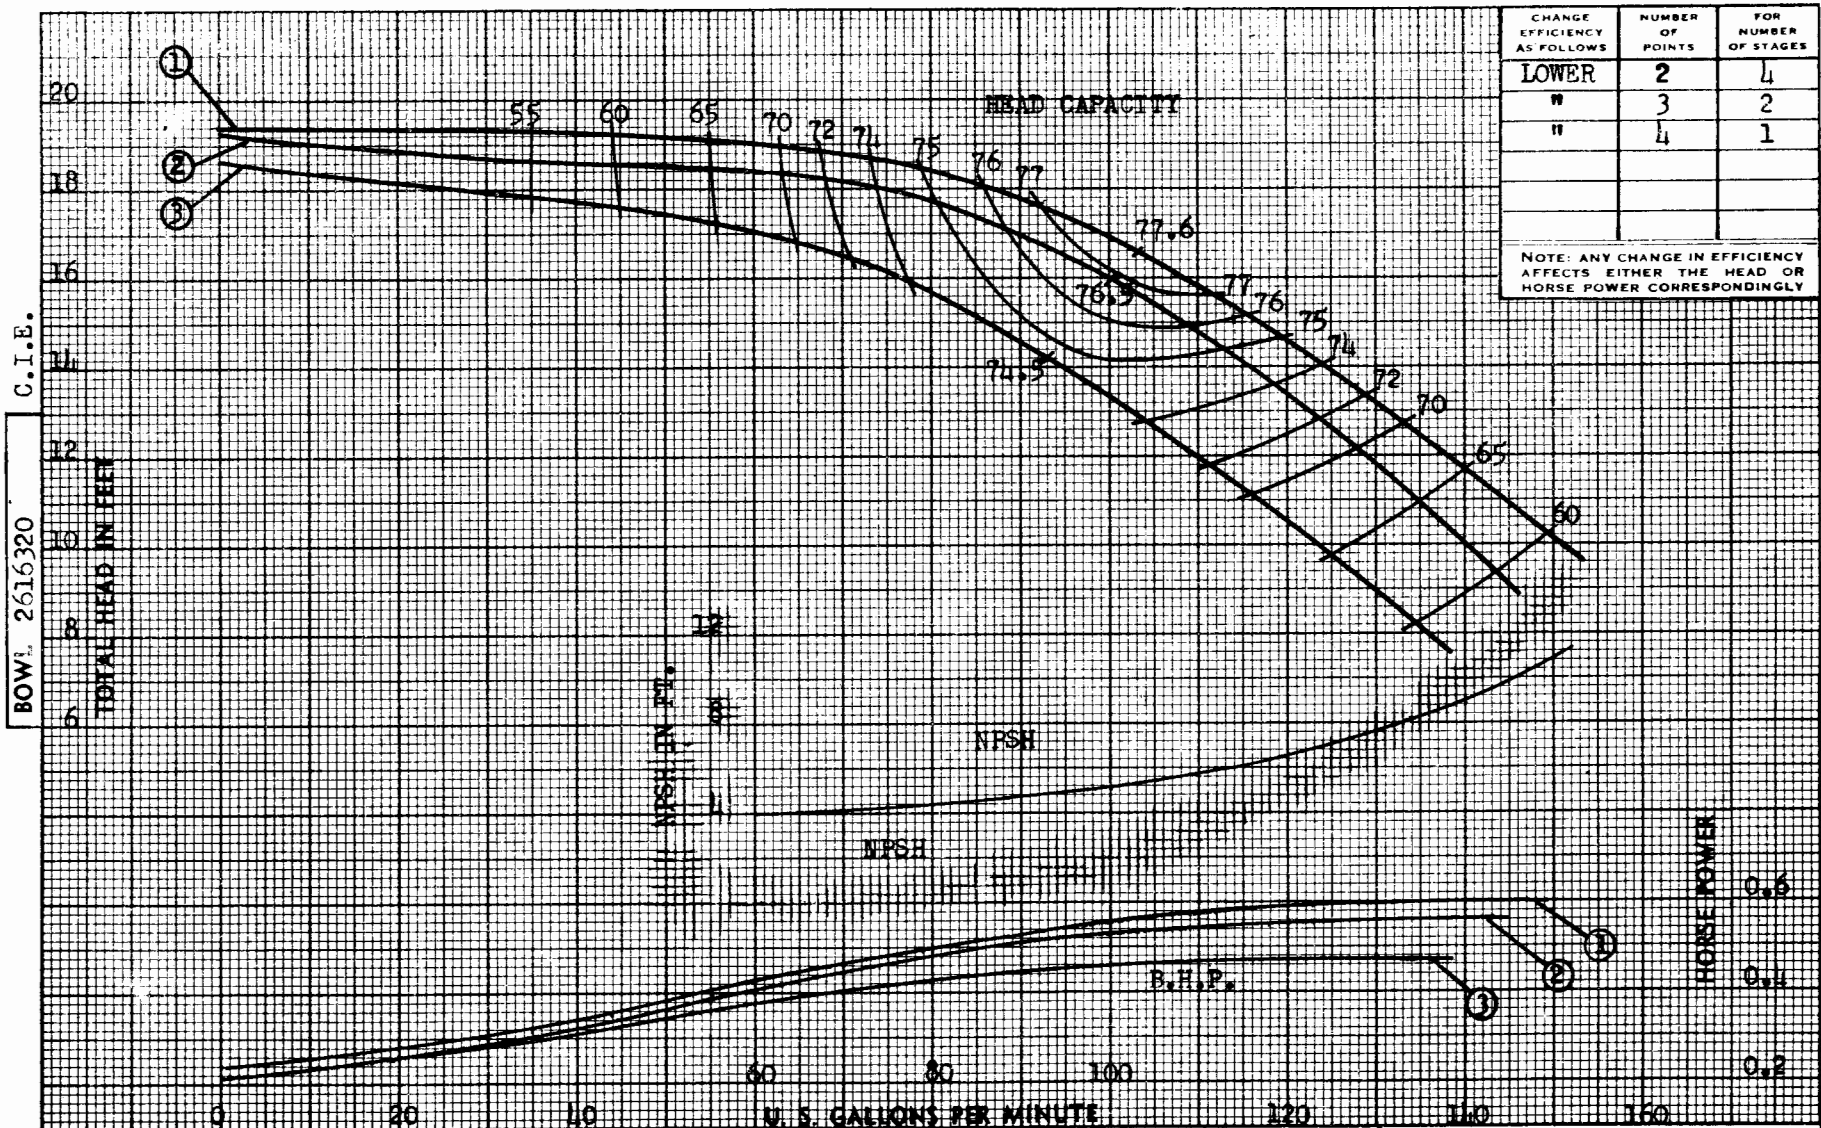

PEERLESS PUMP

HYDRODYNAMICS DIVISION

PERFORMANCE PER STAGE

6 LB

DEEP WELL TURBINE PUMP

1760

R. P. M.

SHEET NO.

2831812