


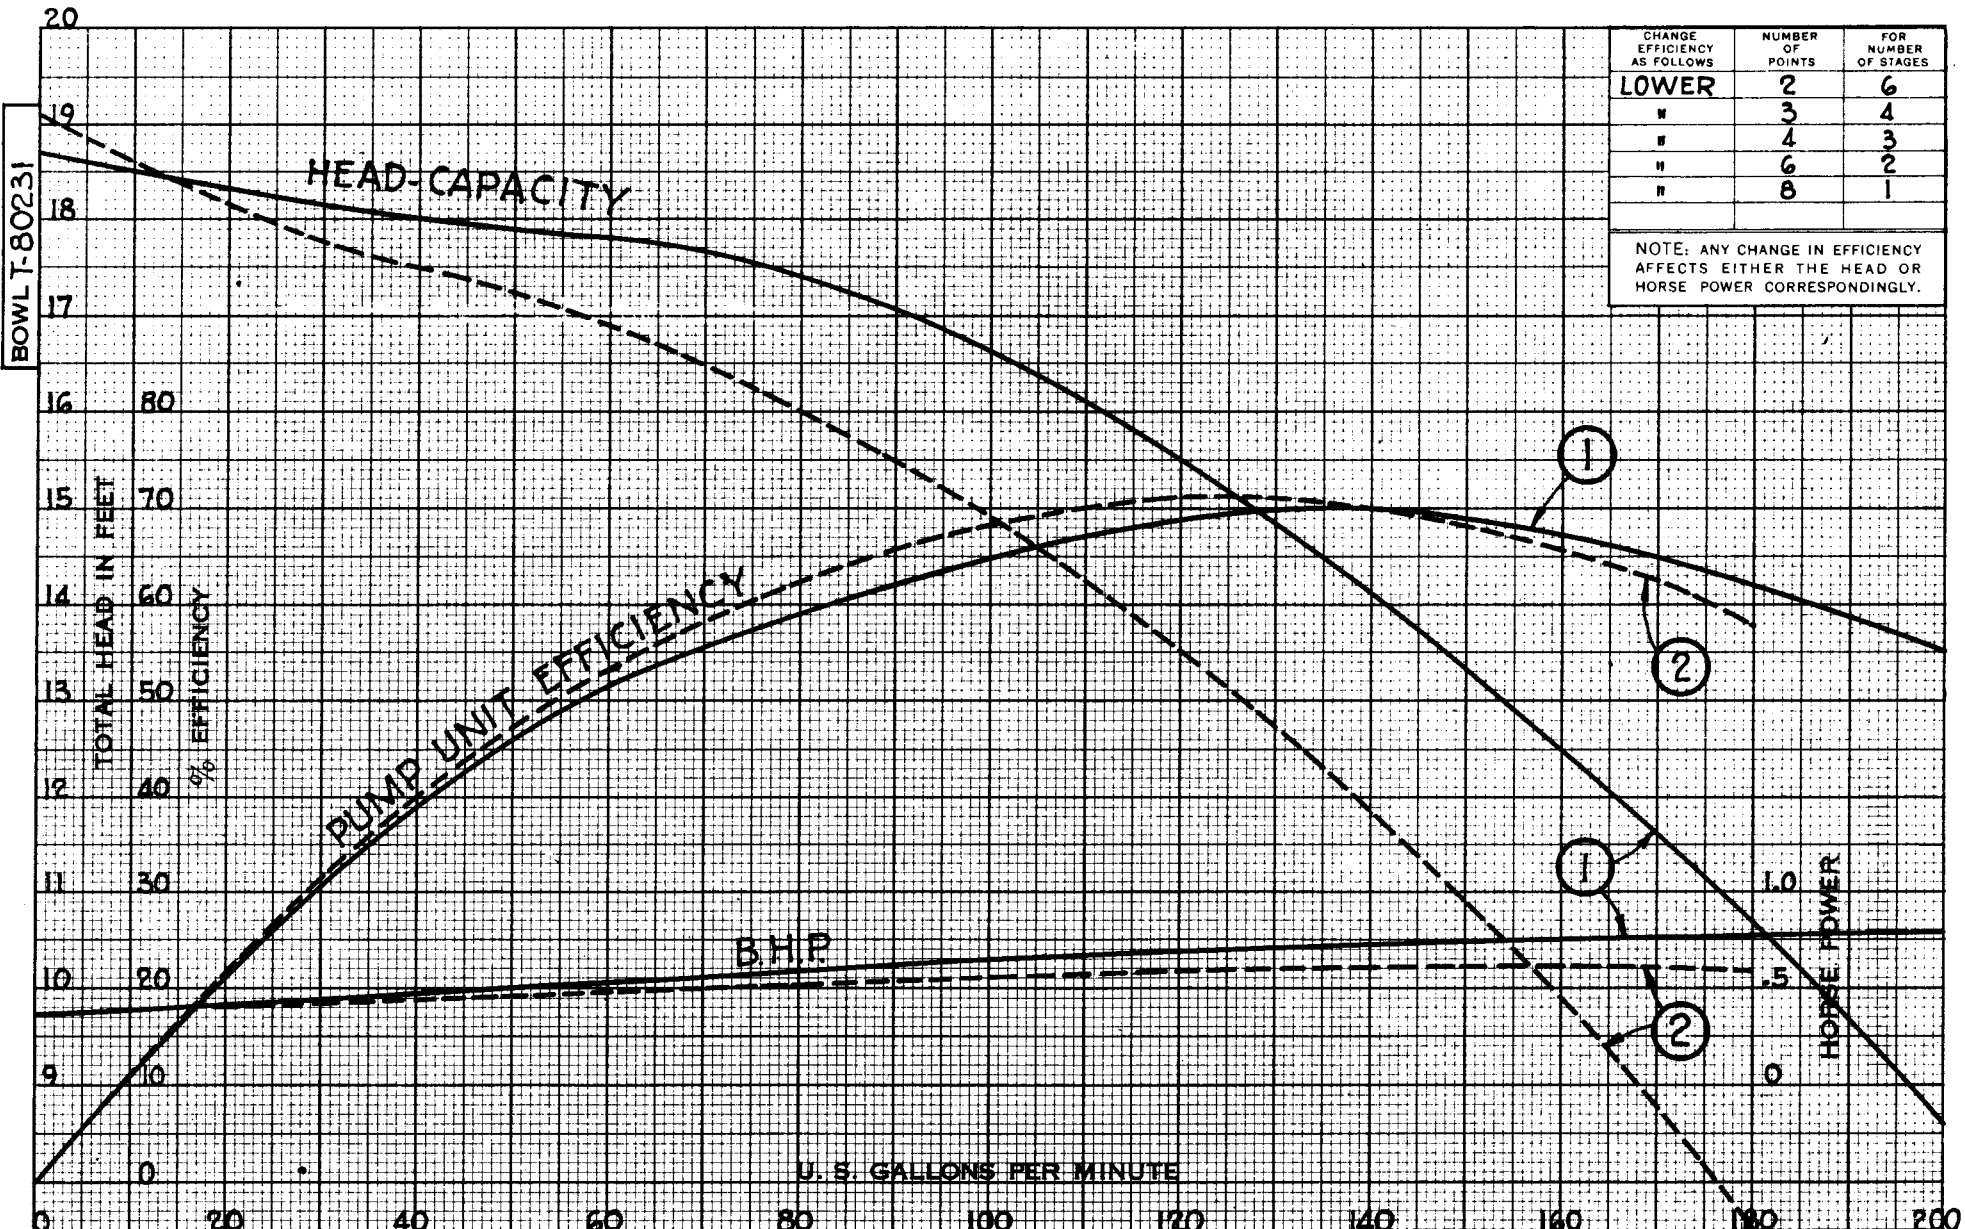

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	2	6
"	3	4
"	4	3
"	6	2
"	8	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

BOWL T-80231

HYDRAULIC PERFORMANCE
CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-82784	4 7/16"	T-2905
2	T-82785	4 7/16"	T-2912
3			

Los Angeles, California

San Jose, California

JOHN BEAN

MFG. CO.

Massillon, Ohio

Lansing, Michigan

PERFORMANCE PER STAGE

6" M

1760

DEEP WELL TURBINE PUMP

R. P. M.

SHEET NO. R-626