

HYDRAULIC PERFORMANCE
WARRANTYGuaranteed at designated point
only, and contingent on:

Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED

- ☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY

GPM

TOTAL DYNAMIC
HEAD

FT

EFFICIENCY

BRAKE HORSEPOWER

BHP

FMC
Pump Division

LABORATORY
PERFORMANCE

SIZE

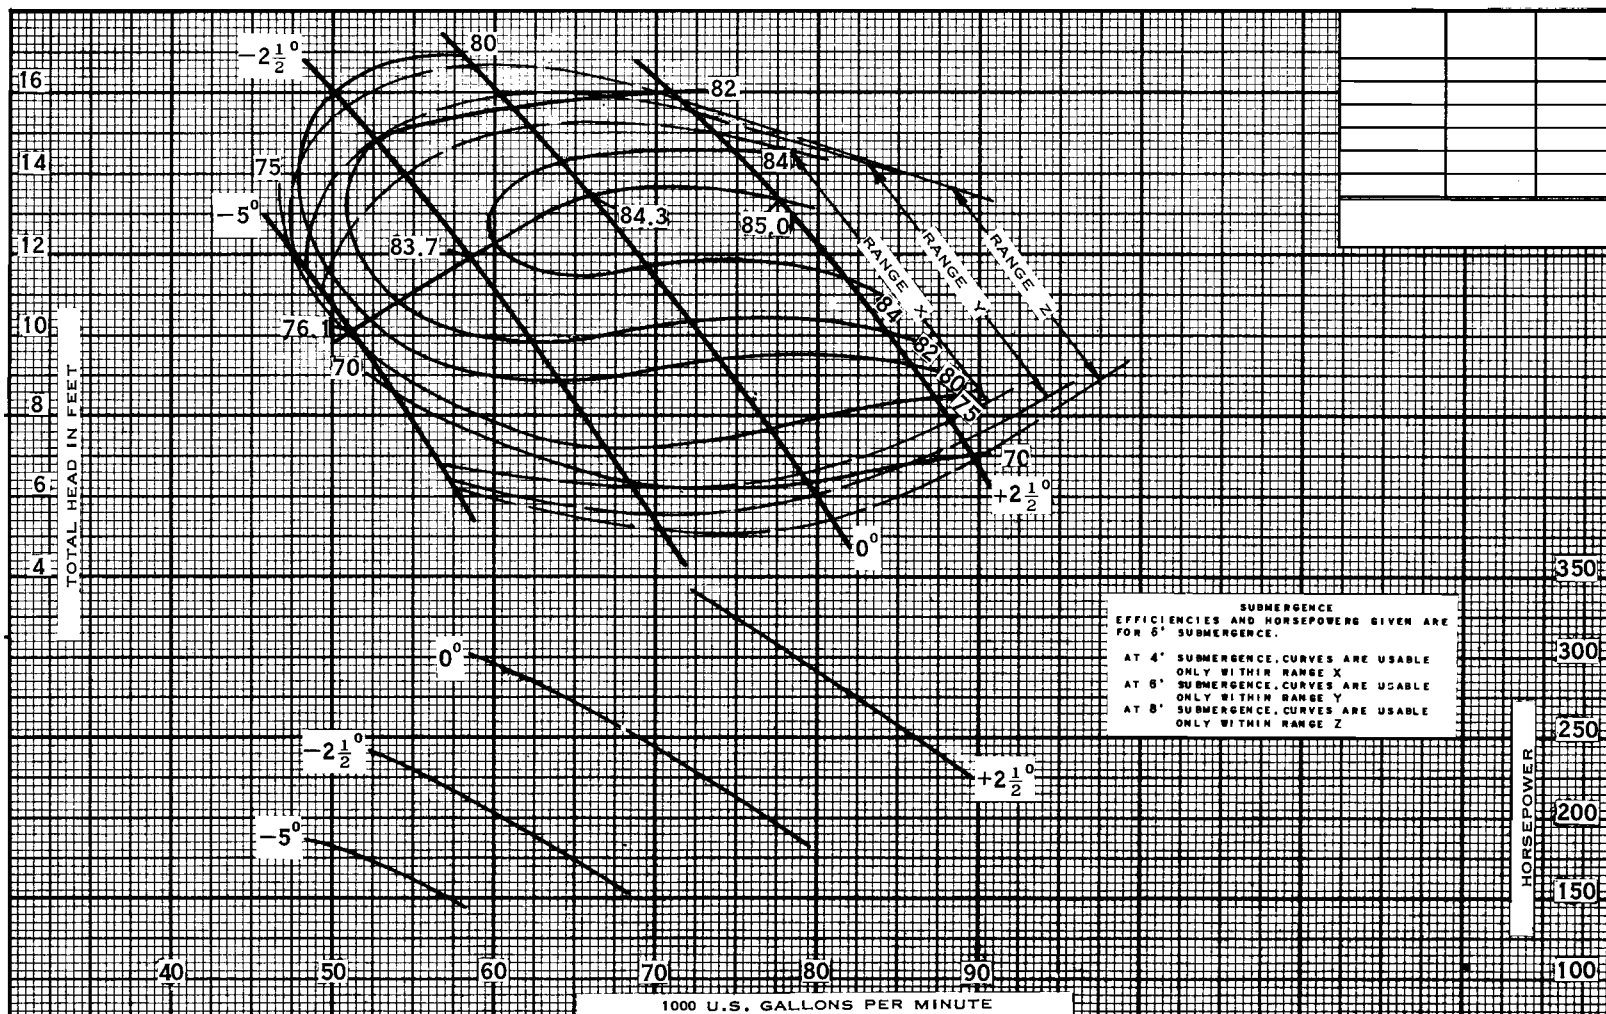
60 PL

RPM

350

CURVE NUMBER

V 4061 A

DESCRIPTION: Hydro-Foil Pump with: Bowl **V2431E** ; Propeller **V2433D**

Elbow ☐ above ☐ below base dia with x inner column

Driver

PEERLESS

Customer

Item

Peerless Ref. No.

Pump No.