


## 2 POLE 60 HERTZ PERFORMANCE

### EFFICIENCY ADJUSTMENT FOR STAGING

| STAGES | NUMBER OF POINTS |
|--------|------------------|
| 1      | Lower 4          |
| 2      | Lower 3          |
| 3      | Lower 2.5        |
| 4      | Lower 2          |
| 5      | Lower 1          |

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSEPOWER CORRESPONDINGLY

### HEAD CAPACITY

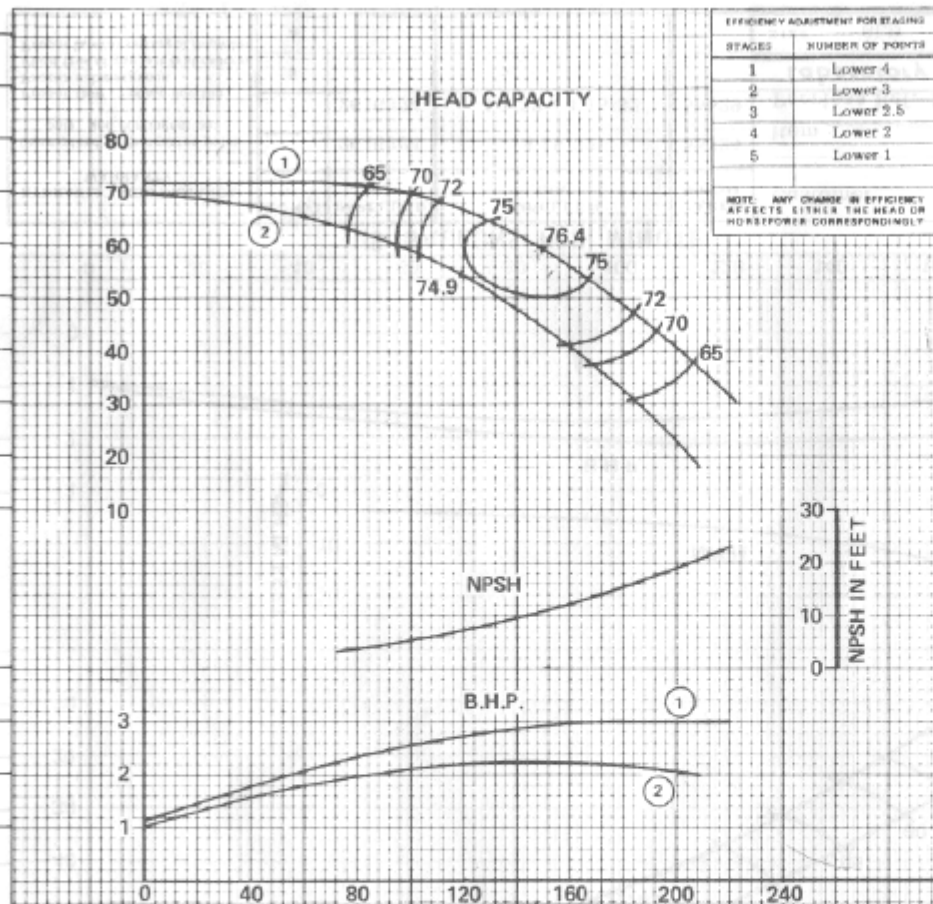

### GUARANTEED PERFORMANCE

○ Bowl

○ Field

Capacity \_\_\_\_\_ gpm

Head \_\_\_\_\_ Feet

BHP \_\_\_\_\_

EFFICIENCY \_\_\_\_\_ %

DRIVER \_\_\_\_\_

HEAD \_\_\_\_\_

COLUMN \_\_\_\_\_

| HYDRAULIC PERFORMANCE WARRANTY                                                                                                                                                           | CURVE NO. | IMPELLER NO. | IMPELLER DIA.    | TAKEN FROM | Customer _____                |          |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------|------------------|------------|-------------------------------|----------|------------------|
|                                                                                                                                                                                          | 1         | 2618292      | 4-15/32          | 55519      | Item _____                    |          |                  |
|                                                                                                                                                                                          | 2         | 2618292      | 4-1/64 x 4-15/32 | 55530      | Peerless Ref. No: _____       |          |                  |
|                                                                                                                                                                                          | 3         |              |                  |            | <b>Laboratory Performance</b> |          |                  |
|                                                                                                                                                                                          | 4         |              |                  |            | SIZE 6LB                      | RPM 3460 | BOWL 2616320 CIE |
| Guaranteed at designated point only, and contingent on:<br>Proper flow to pump suction<br>Proper submergence<br>Fluid free of gas, air & abrasives<br>Proper lateral setting of impeller |           |              |                  |            | CURVE 4806260                 |          |                  |