


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	2	6
	3	4
	4	3
	5	2
	6	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

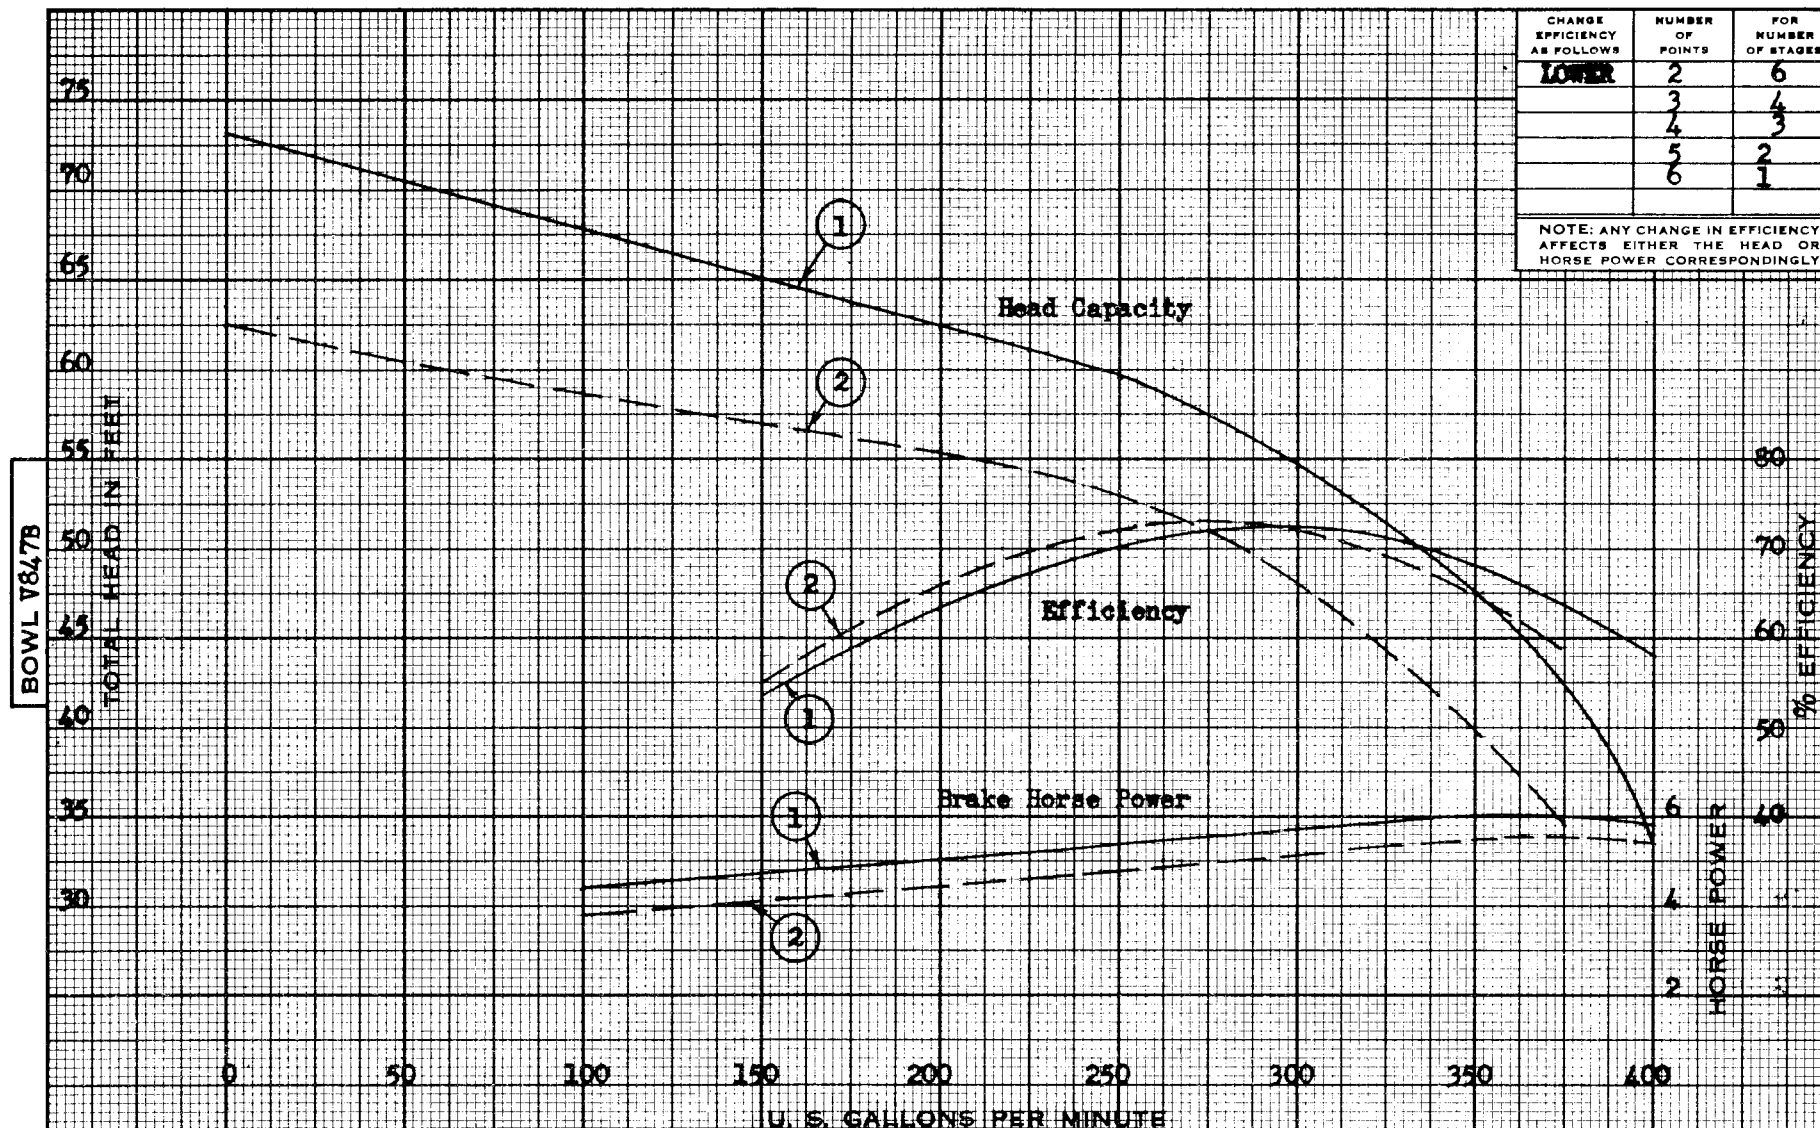

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	PEERLESS PUMP DIVISION FOOD MACHINERY CORPORATION LOS ANGELES 31, CALIF. 	PERFORMANCE STAGE		
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	1	V850B	4-5/16"	21493		6"WA	DEEP WELL.	
	2	V850B	4-3/16"	21367			TURBINE PUMP	
	3						3460	R. P. M.
						SHEET NO. R1584		

PRINTED IN U. S. A.

Peerless Pump Division
Food Machinery Corporation

Subject to change without notice