


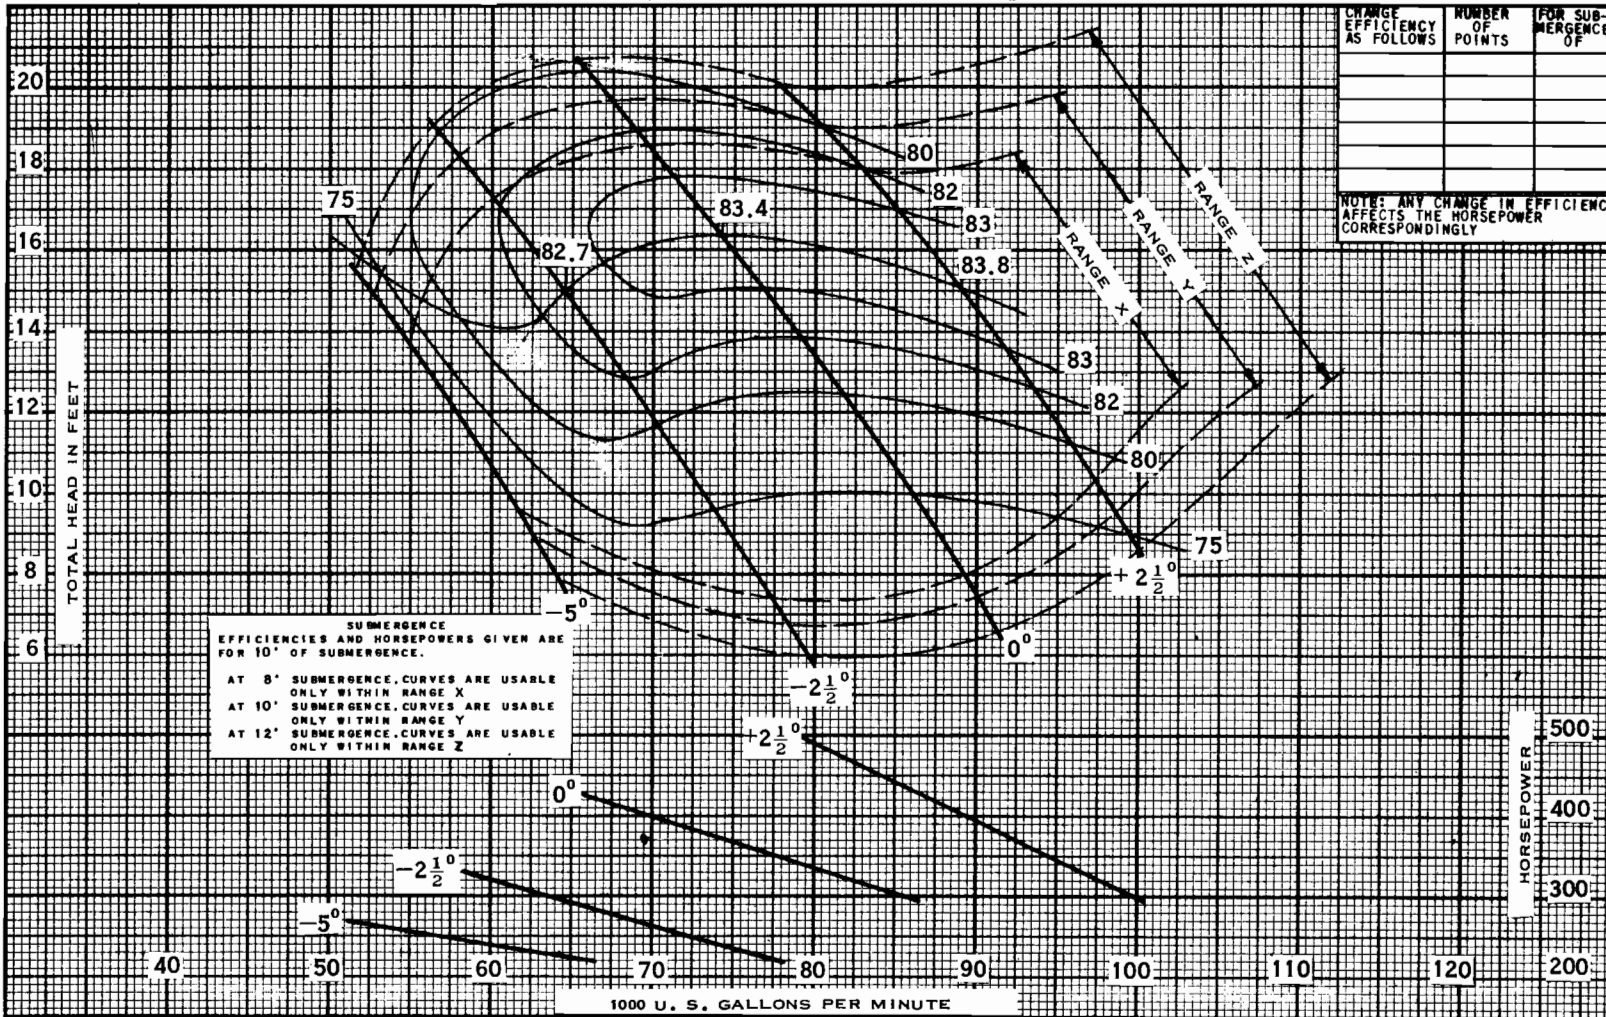

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUBMERGENCE OF

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

- Proper sump configuration
- Proper submergence
- Fluid free of gas, air & abrasives
- Proper lateral setting of impeller

GUARANTEED
☐ BOWL
☐ FIELD
PERFORMANCE
CAPACITY
GPM
TOTAL DYNAMIC HEAD
FT
EFFICIENCY
BRAKE HORSEPOWER
BHP



LABORATORY PERFORMANCE
SIZE
60 PL
RPM
390
CURVE NUMBER
V 4199A

DESCRIPTION: Hydro-Foil Pump with: Bowl V 2431E ; Propeller V 2433D Elbow ☐ above ☐ below base dia with x inner column Driver: _____ PEERLESS	Customer _____ Item _____ Peerless Ref. No. _____ Pump No. _____
--	---