




Peerless Pump Company
Indianapolis, IN 46207-7026

VERTICAL TURBINE PUMPS
Model 48HXB - 505 Rpm

SECTION 140
Page 505-13
October, 1974

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RATSE	2	2
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

Staging Factor	
No. of Stages	Multiply Head By:
1	1.0
2	1.9
Also apply efficiency factor	

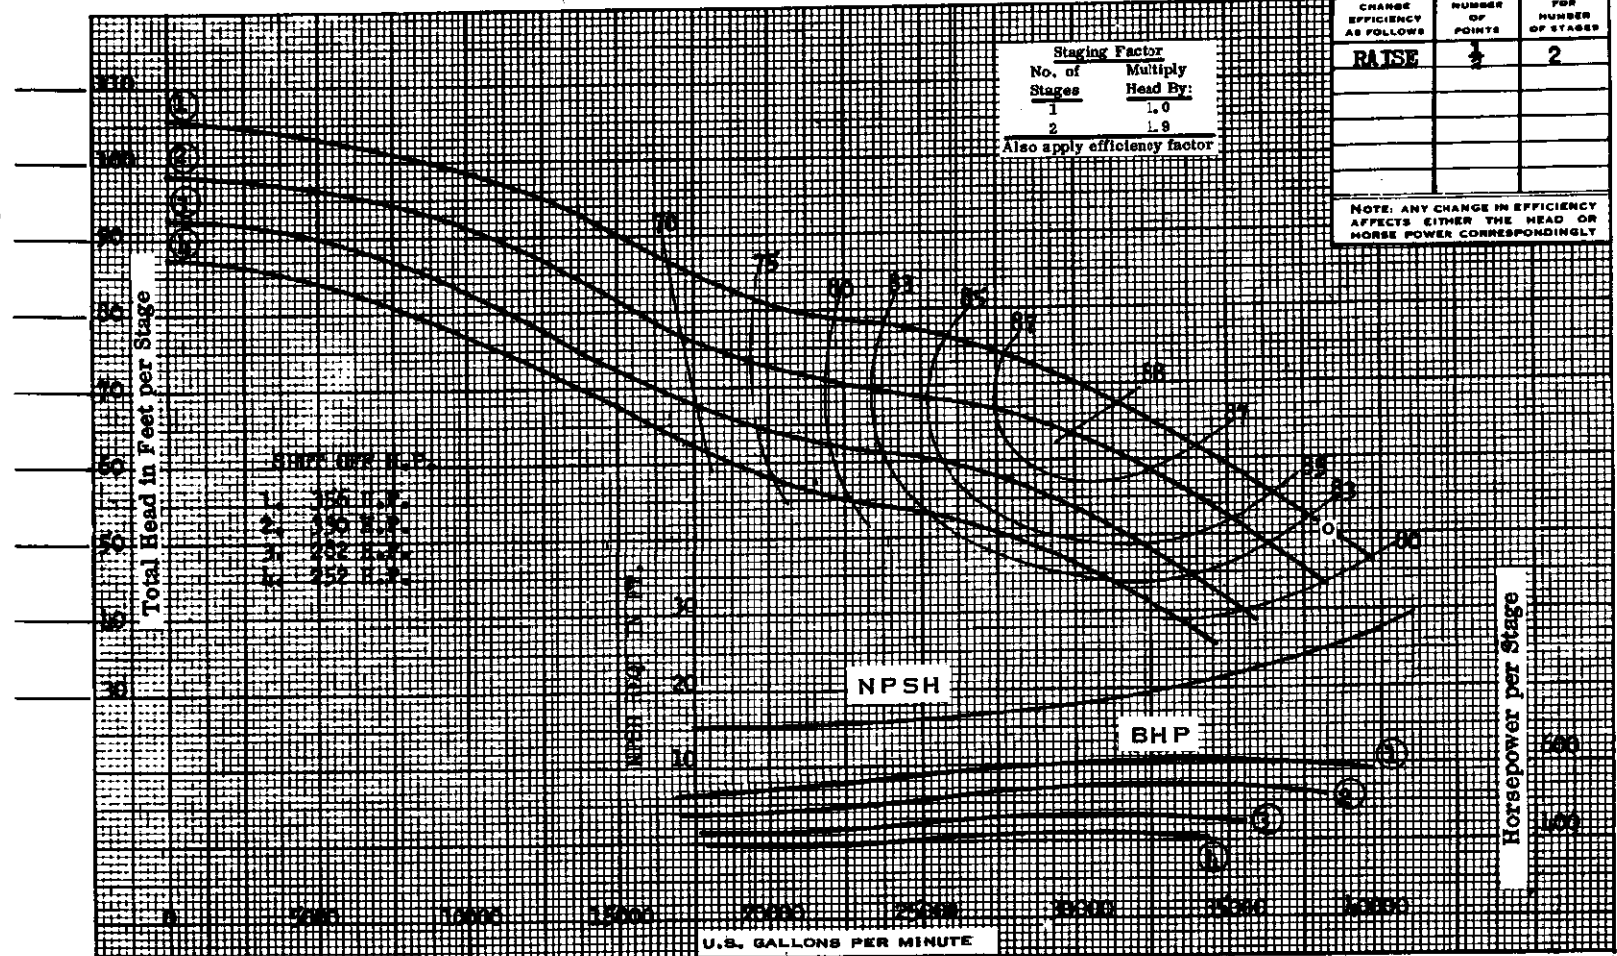

Head and Capacity Warranty Contingent on: Proper flow to pump suction Proper submergence Fluid free of gas, air & abrasives Proper lateral setting of impeller	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer: _____		
	1	2608562	33 ³ / ₄ " x 35 ¹³ / ₁₆ "		Item No: _____		
	2	2608562	31 ²⁵ / ₃₂ " x 33 ³ / ₄ "		Peerless Ref. No: _____		
	3	2608562	30 ⁷ / ₁₆ " x 32 ⁵ / ₈ "		Laboratory Performance		
	4	2608562	29 ³ / ₃₂ " x 30 ¹⁵ / ₁₆ "		SIZE 48 HXB	RPM 505	BOWL 2608575 CI PLASTIC COATED
						CURVE 2846869	

PUMP DESCRIPTION: Driver _____; Head _____; Column _____
FIELD PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____

Peerless Pumps
Total Head in Feet for _____ Stages