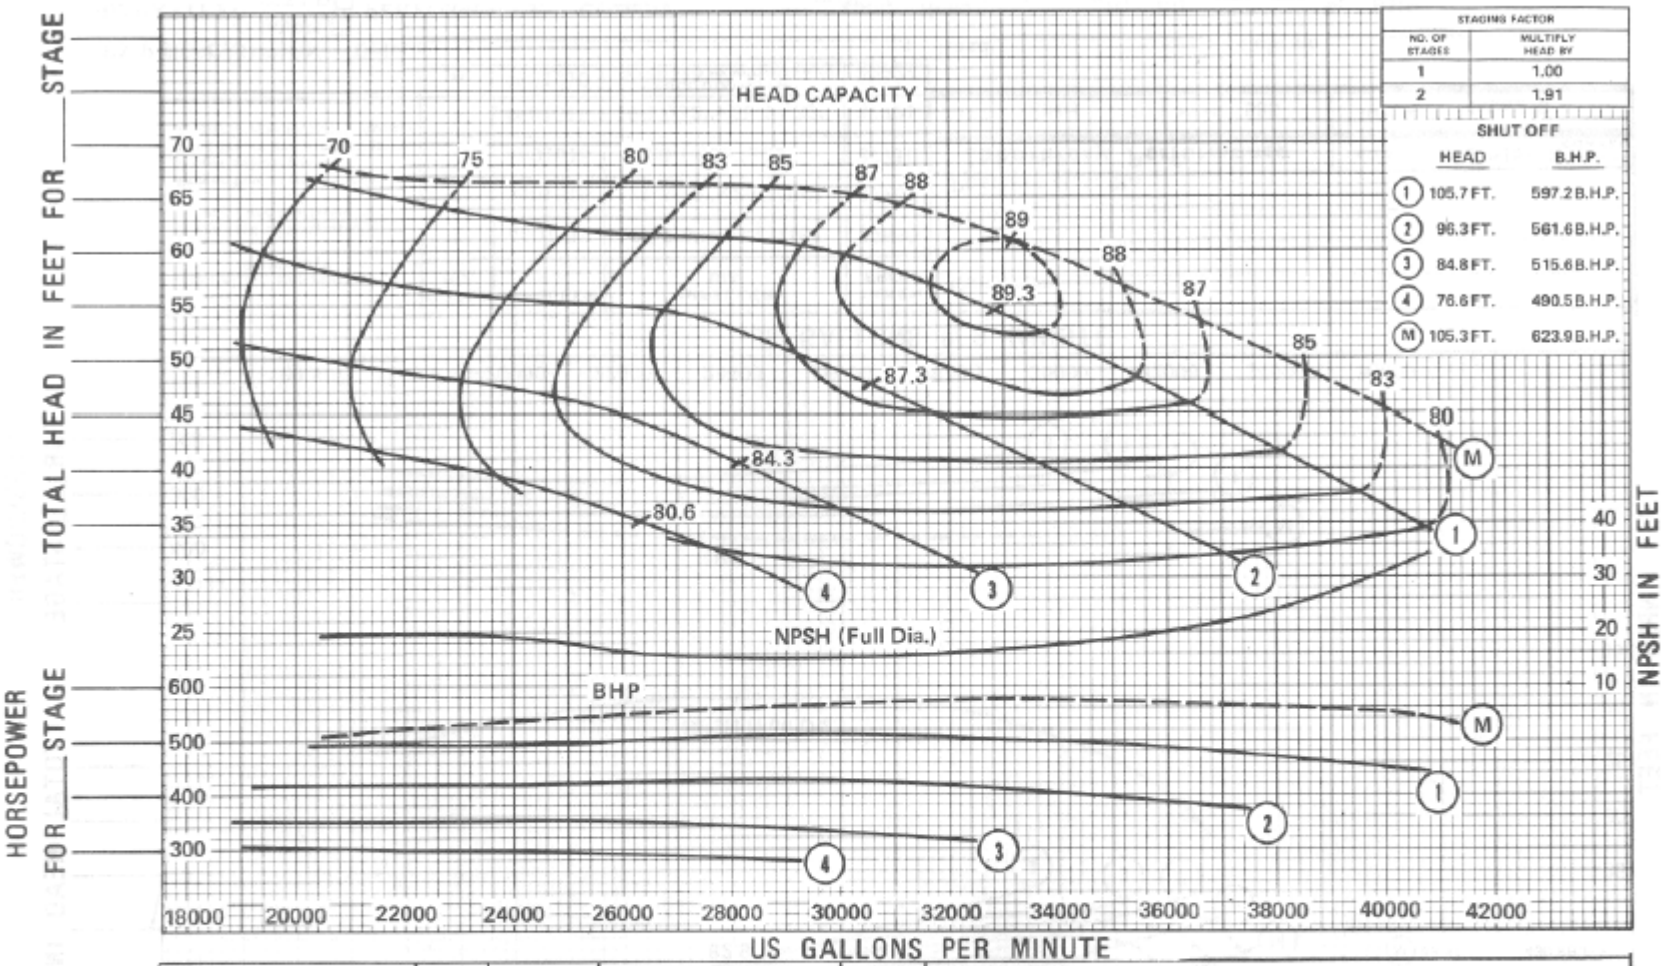


STAGING FACTOR	
NO. OF STAGES	MULTIPLY HEAD BY
1	1.00
2	1.91

SHUT OFF	HEAD	B.H.P.
1	105.7 FT.	597.2 B.H.P.
2	96.3 FT.	561.6 B.H.P.
3	84.8 FT.	515.6 B.H.P.
4	76.6 FT.	490.5 B.H.P.
M	105.3 FT.	623.9 B.H.P.

HYDRAULIC PERFORMANCE WARRANTY	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
Guaranteed at designated point only, and contingent on: Proper flow to pump suction, Proper submergence, Fluid free of gas, air & abrasives, Proper lateral setting of impeller	1	4601514	24-23/32" x 32-1/16"	36758
	2	4601514	22-9/16" x 31-7/32"	36783
	3	4601514	20-1/2" x 30-15/32"	36814
	4	4601514	18-3/16" x 29-13/16"	36837
	M	4601514	FULL DIAMETER EXTENDED PERFORMANCE	58320

Customer _____

Item _____

Peerless Ref. No: _____

Laboratory Performance | BOWL 4601516C.I. PLASTIC COATED

SIZE 42HH | RPM 585 | CURVE 4806283

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED BOWL ☐ FIELD ☐ PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____

Peerless Pump
A Sterling Company