


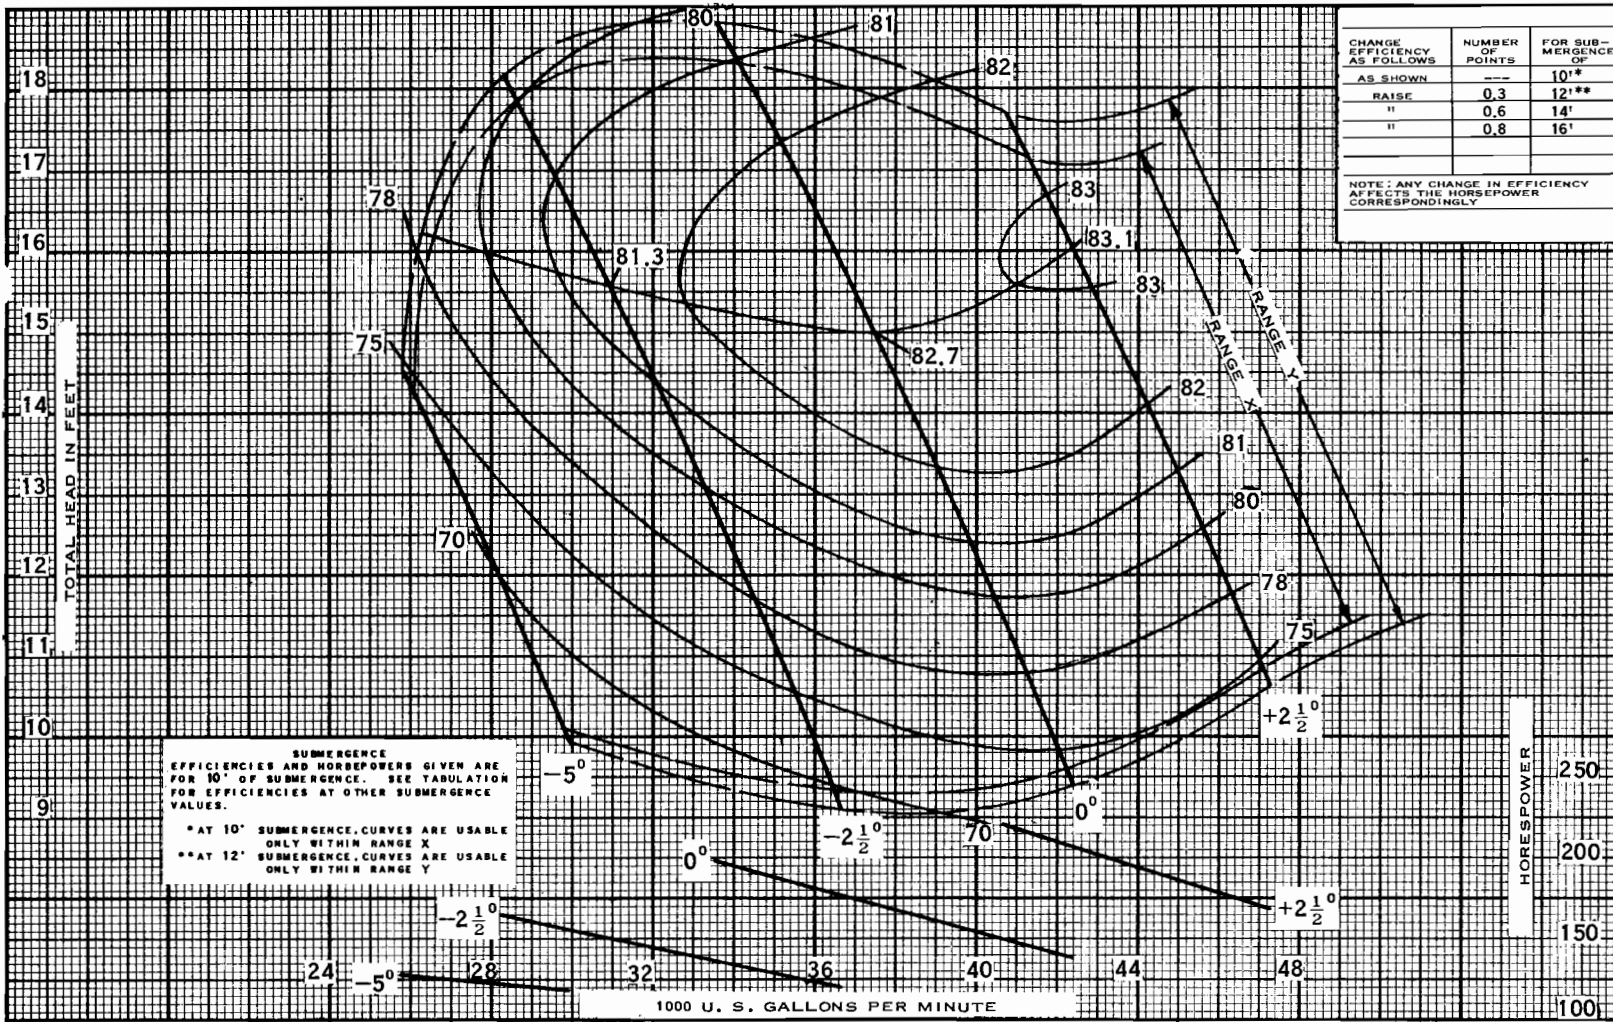

| CHANGE EFFICIENCY AS FOLLOWS | NUMBER OF POINTS | FOR SUBMERGENCE OF |
|------------------------------|------------------|--------------------|
| AS SHOWN                     | 0.3              | 10'                |
| RAISE                        | 0.6              | 12'                |
| "                            | 0.8              | 14'                |
| "                            |                  | 16'                |

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

**HYDRAULIC PERFORMANCE WARRANTY**

Guaranteed at designated point only, and contingent on:

- Proper sump configuration
- Proper submergence
- Fluid free of gas, air & abrasives
- Proper lateral setting of impeller

**GUARANTEED**

☐ BOWL

☐ FIELD

**PERFORMANCE**

CAPACITY \_\_\_\_\_ GPM

TOTAL DYNAMIC HEAD \_\_\_\_\_ FT

EFFICIENCY \_\_\_\_\_

BRAKE HORSEPOWER \_\_\_\_\_ BHP



**LABORATORY PERFORMANCE**

SIZE **42 PL**

RPM **575**

CURVE NUMBER **V4081A**

DESCRIPTION: Hydro-Foil Pump with: Bowl **T83805** ; Propeller **T83303** -

Elbow ☐ above ☐ below base dia with \_\_\_\_\_ x \_\_\_\_\_ inner column

Driver \_\_\_\_\_

**PEERLESS**

Customer \_\_\_\_\_

Item \_\_\_\_\_

Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_