

HYDRAULIC PERFORMANCE
WARRANTYGuaranteed at designated point
only, and contingent on:

Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED

- ☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY

GPM

TOTAL DYNAMIC
HEAD

FT

EFFICIENCY

BRAKE HORSEPOWER

BHP

FMC
Pump Division

LABORATORY
PERFORMANCE

SIZE

10 PL

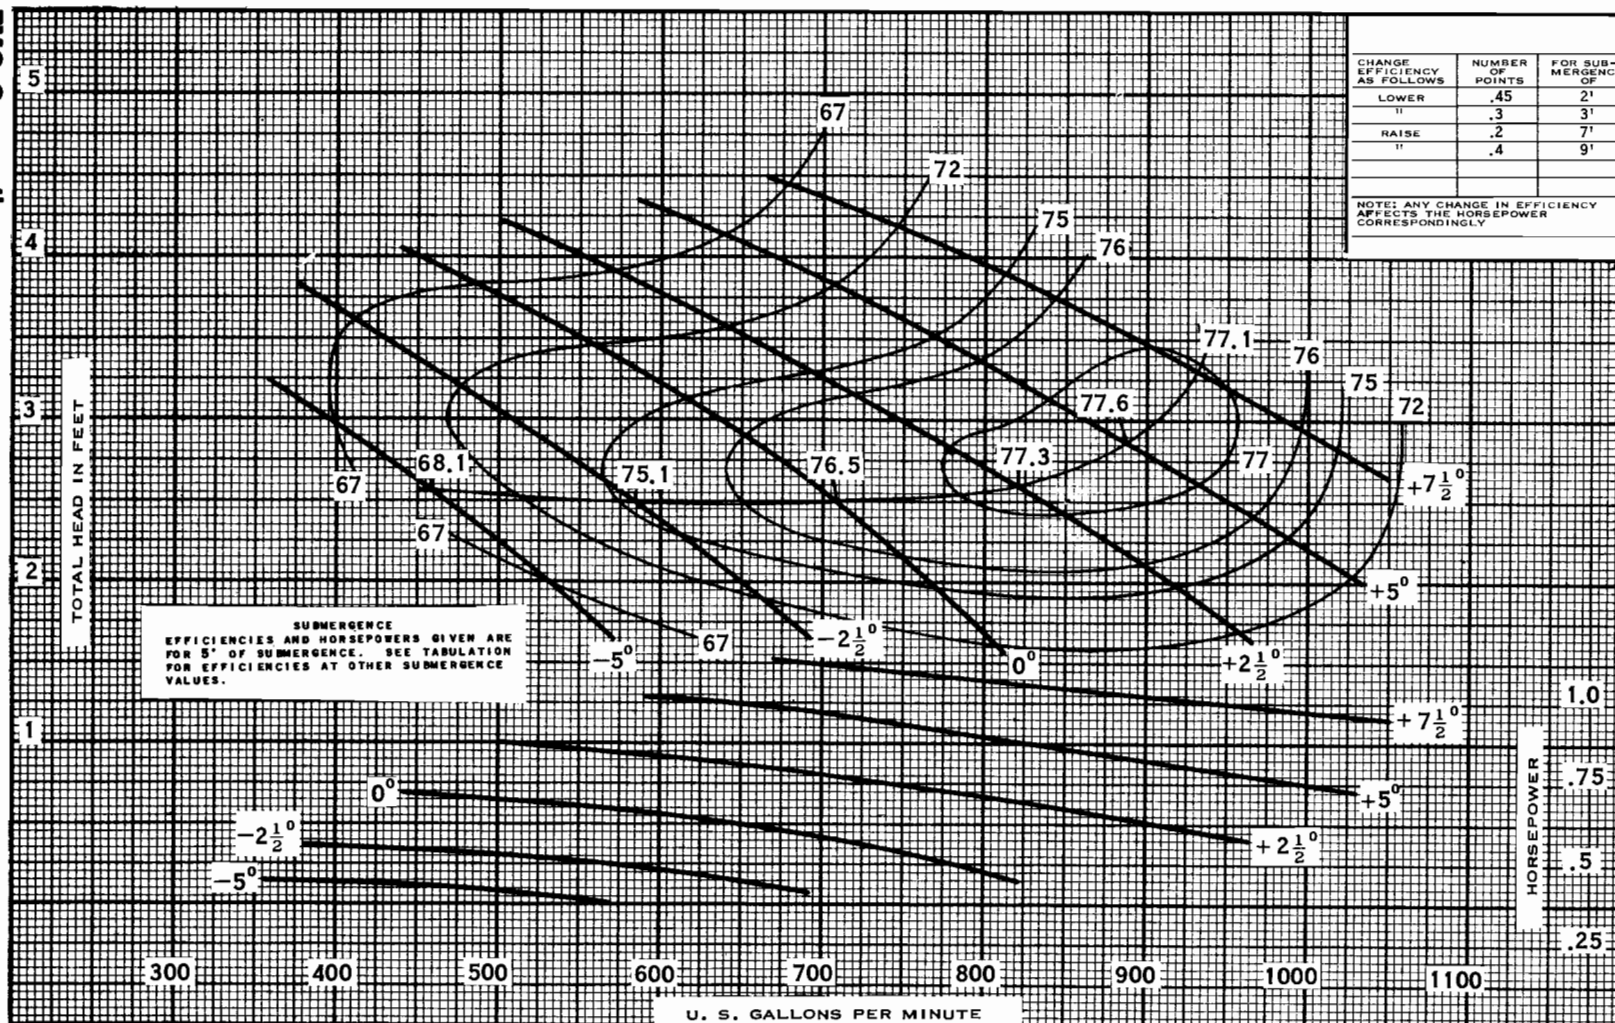
RPM

970

CURVE NUMBER

V 4209 A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB- MERGENCE OF
LOWER	.45	2'
"	.3	3'
RAISE	.2	7'
"	.4	9'

NOTE: ANY CHANGE IN EFFICIENCY
AFFECTS THE HORSEPOWER
CORRESPONDINGLY

DESCRIPTION: Hydro-Foil Pump with: Bowl T83863 ; Propeller T84484

Elbow ☐ above ☐ below base dia with x inner column

Driver:

PEERLESS

Customer

Item

Peerless Ref. No.

Pump No.