

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED

- ☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY

GPM

TOTAL DYNAMIC HEAD

FT

EFFICIENCY

BRAKE HORSEPOWER

BHP

FMC
Pump Division

LABORATORY PERFORMANCE

SIZE

12 PL

RPM


970

CURVE NUMBER

V 4262A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	.45	2'
"	.3	3'
RAISE	.2	7'
"	.4	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

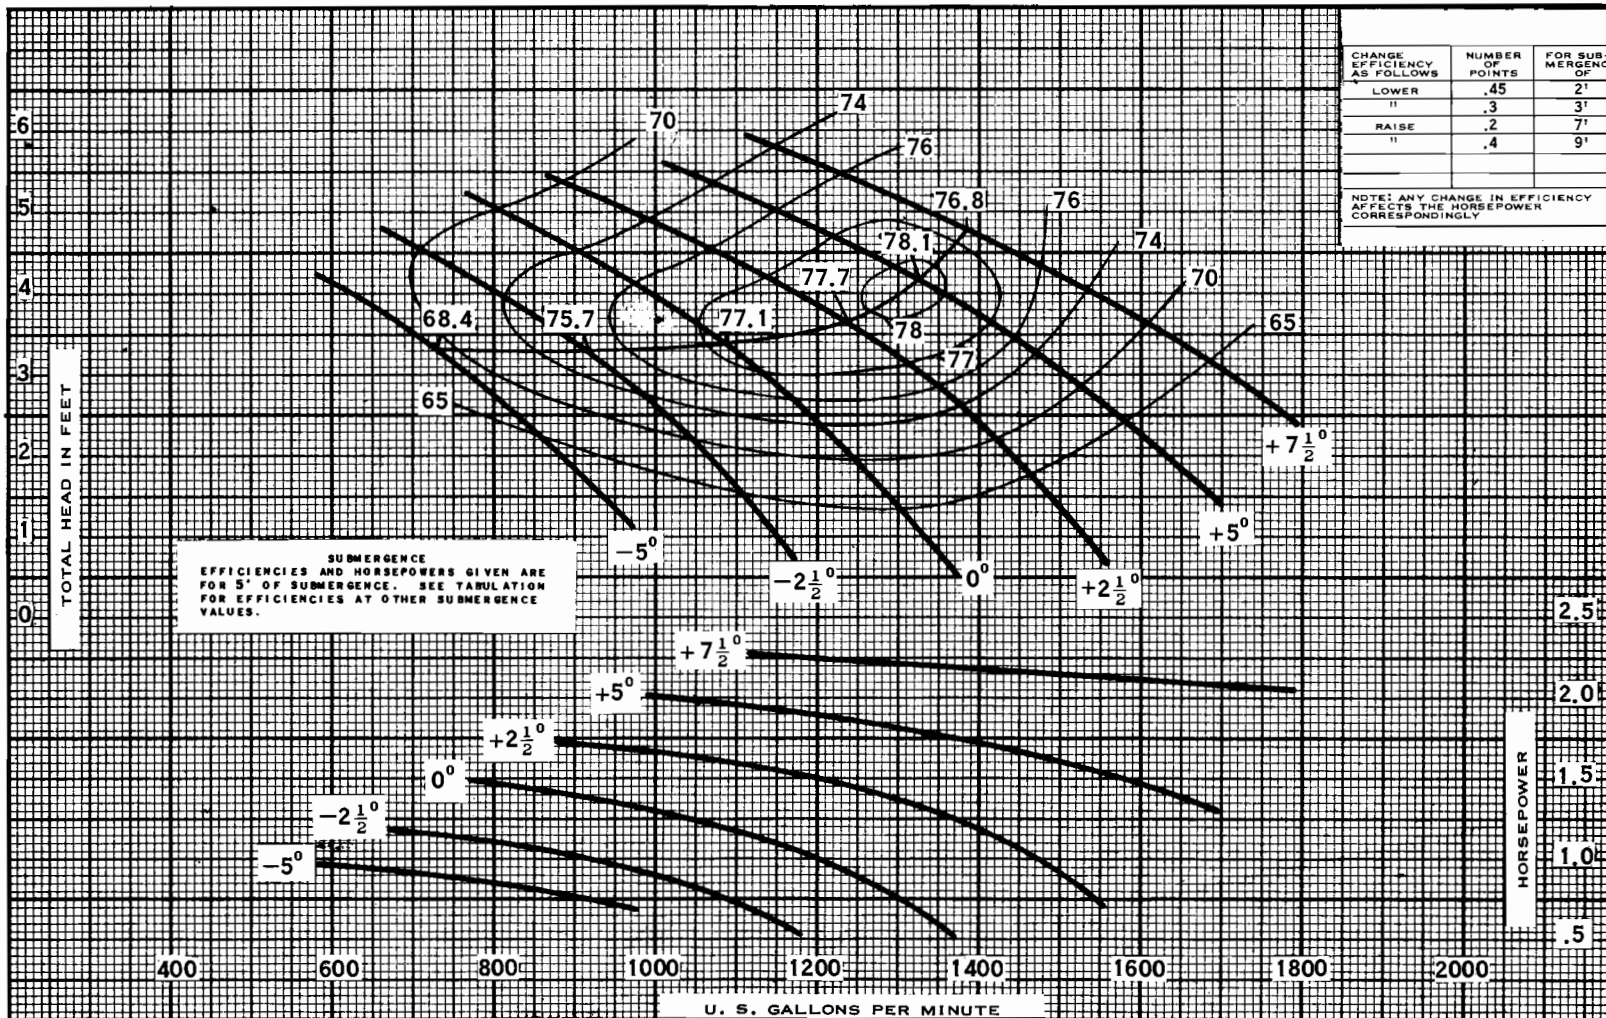

DESCRIPTION: Hydro-Foil Pump with; Bowl T 83864 ; Propeller T 84483

Elbow ☐ above ☐ below base dia with x inner column

Driven:

PEERLESS

Customer

Item

Peerless Ref. No.

Pump No.