


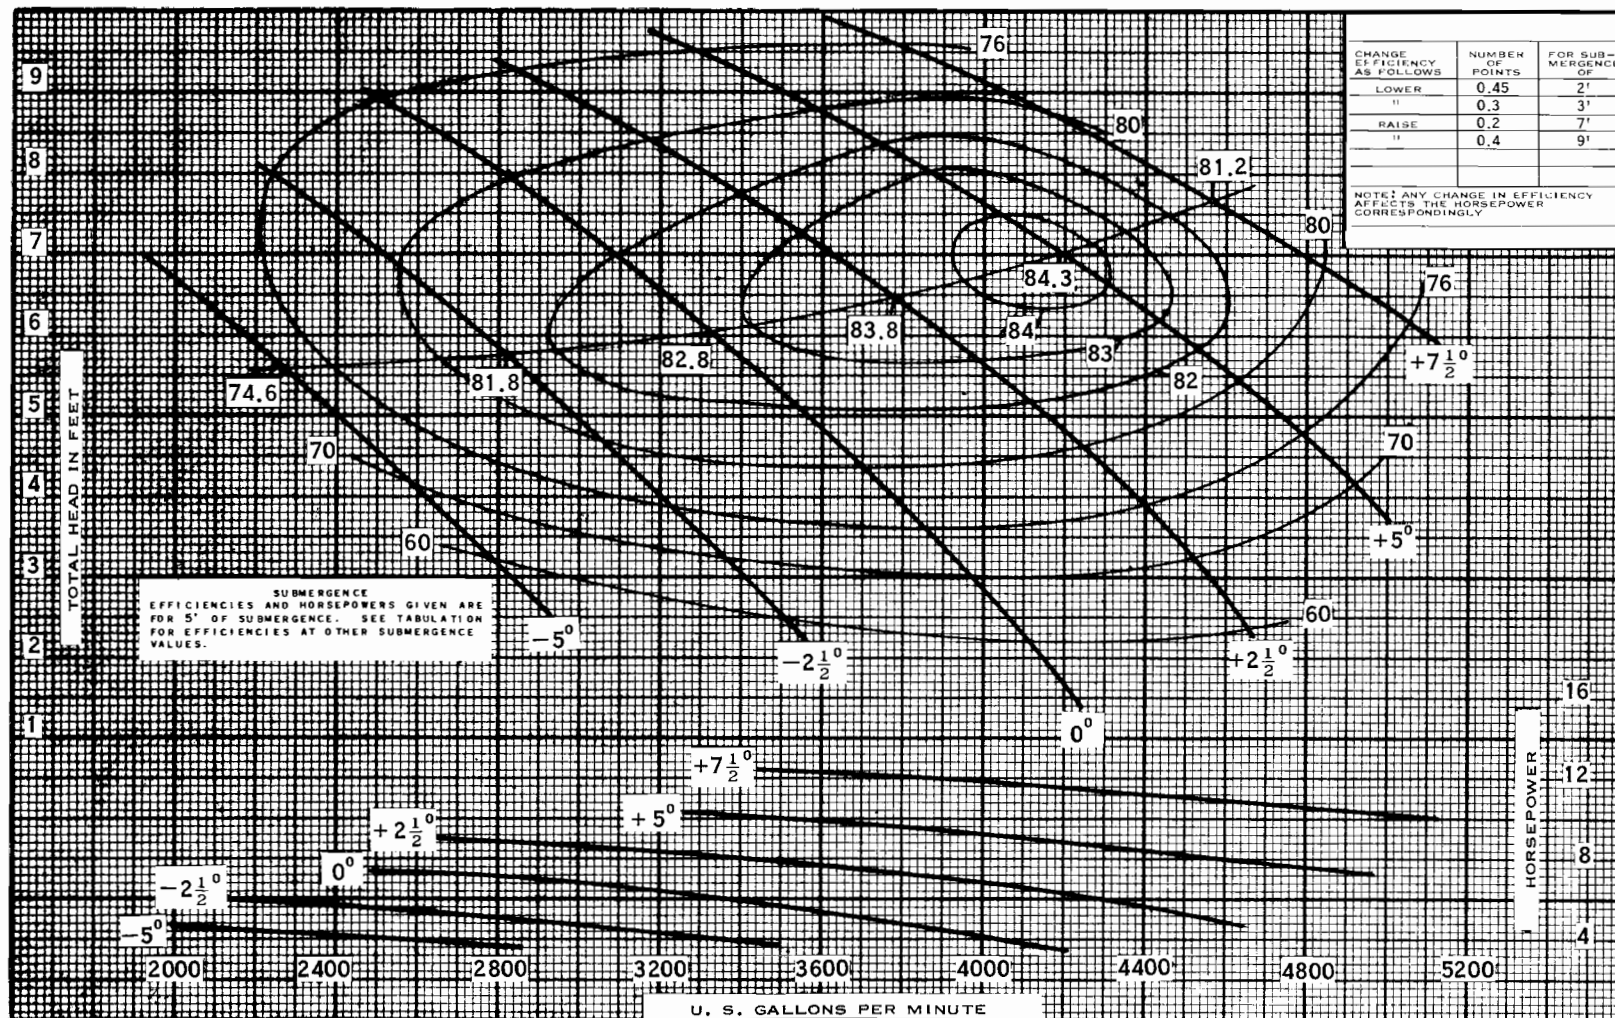

CHANGE IN EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.45	2'
"	0.3	3'
RAISE	0.2	7'
"	0.4	9'

HYDRAULIC PERFORMANCE WARRANTY
Guaranteed at designated point only, and contingent on:
Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED PERFORMANCE
☐ BOWL
☐ FIELD

CAPACITY
GPM

TOTAL DYNAMIC HEAD
FT

EFFICIENCY

BRAKE HORSEPOWER
BHP

FMC
Pump Division

LABORATORY PERFORMANCE

SIZE
16 PL

RPM
870

CURVE NUMBER
V4136A

DESCRIPTION: Hydro-Foil Pump with: Bowl T83760 ; Propeller T84393

Elbow ☐ above ☐ below base dia with x inner column

Driver:

PEERLESS

Customer

Item

Peerless Ref. No.

Pump No.