


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	1
RAISE	1	3
"	2	5

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

SHUT-OFF HEAD { No. 1 - 37.0 FT.
No. 2 - 35.6 FT.

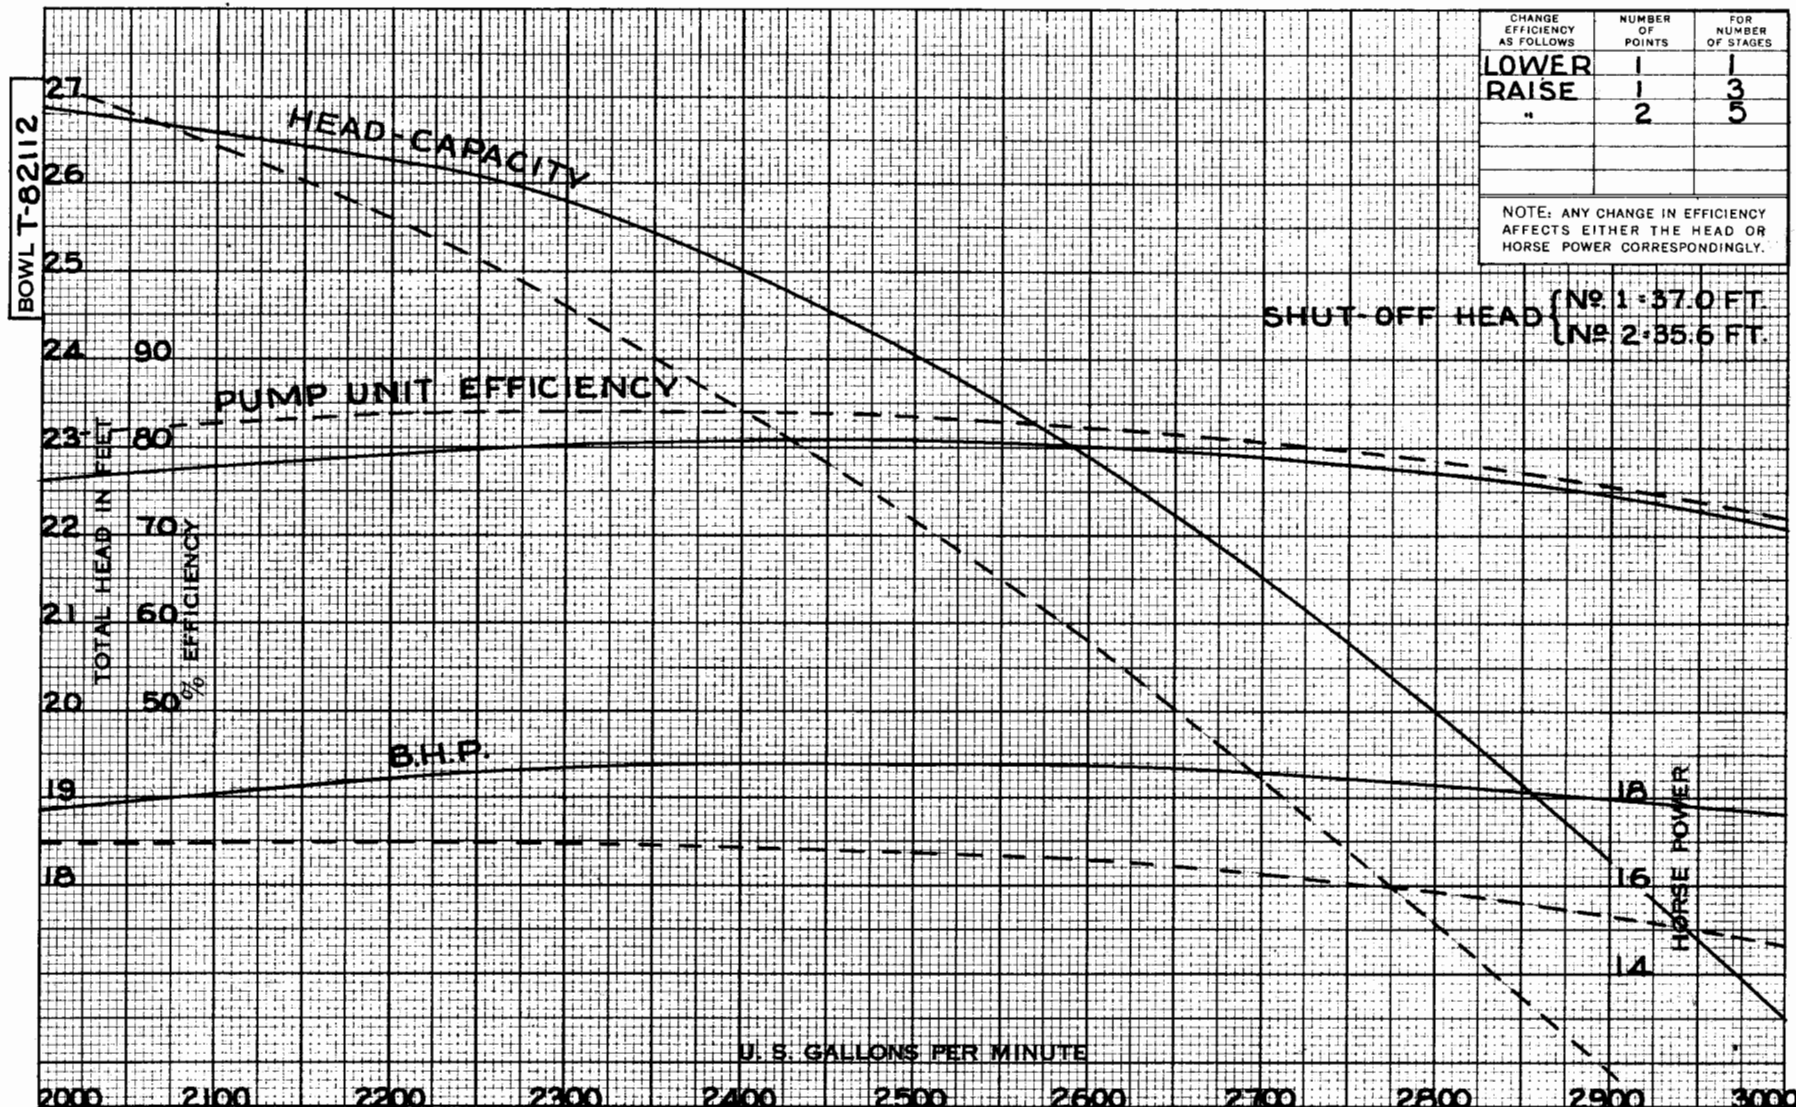

HYDRAULIC PERFORMANCE CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.				
CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	
1	T-82147	11½" x 13½"	T-2144	
2	T-82147E	11½" x 13½"	T-1997	
3				

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE

18H

DEEP WELL
TURBINE PUMP

870

R. P. M.

SHEET NO. R-329