
Total Head in Feet for ____ Stages

Horsepower for ____ Stages

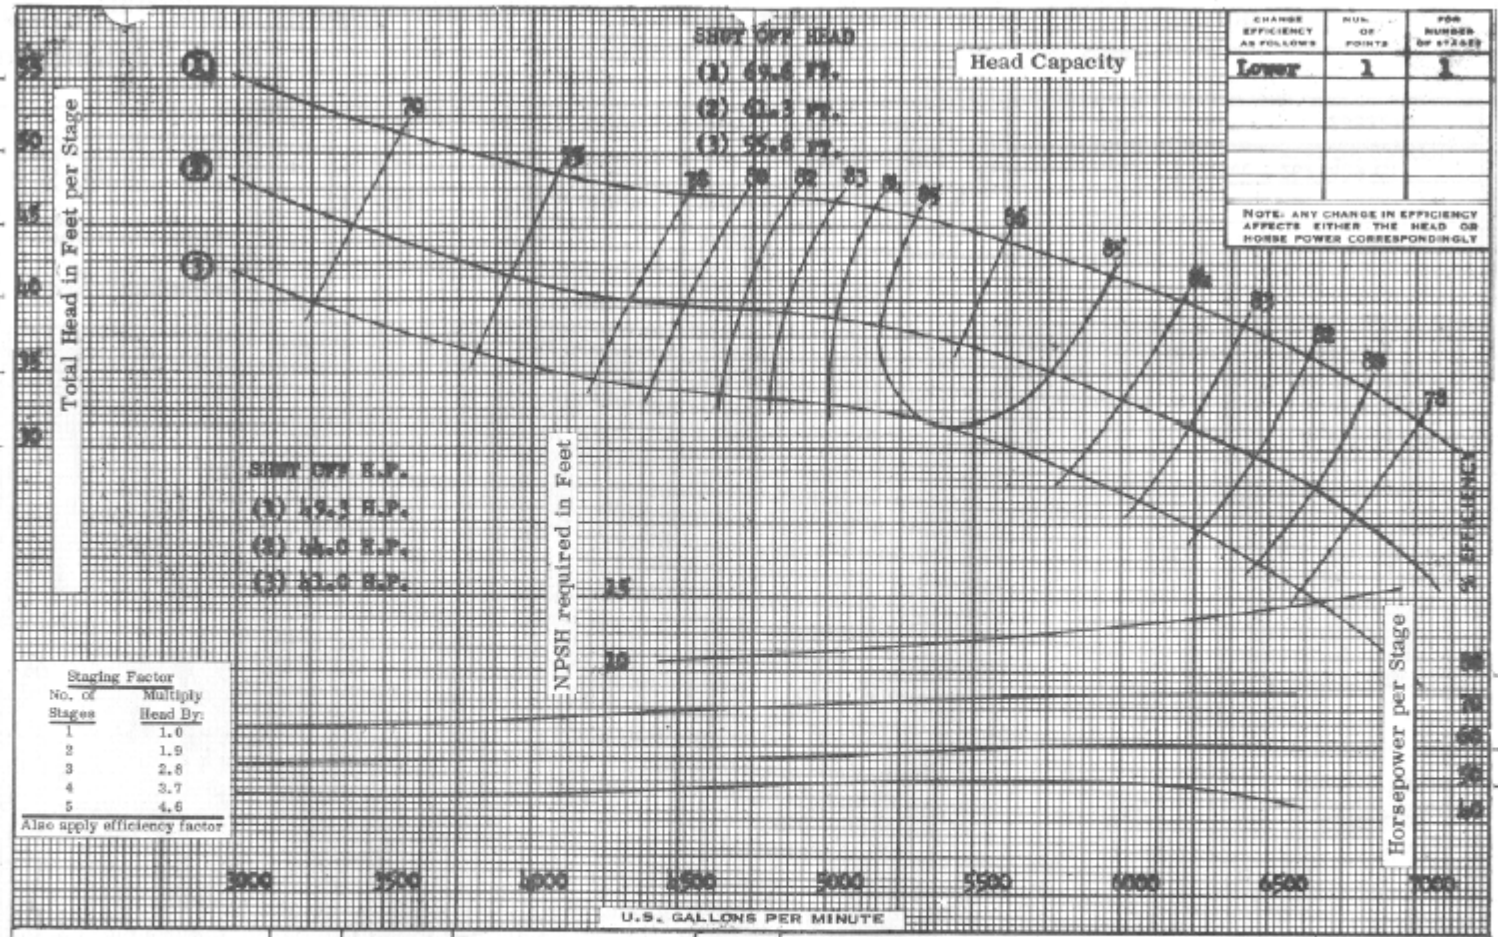


| CHANGE EFFICIENCY AS FOLLOWS | NUM. OF POINTS | FOR NUMBER OF STAGES |
|---|---|---|
| Lower | 1 | 1 |
| | | |
| | | |
| | | |
| | | |

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

Staging Factor

| No. of Stages | Multiply Head By: |
|---|---|
| 1 | 1.0 |
| 2 | 1.9 |
| 3 | 2.8 |
| 4 | 3.7 |
| 5 | 4.6 |

Also apply efficiency factor

**HYDRAULIC PERFORMANCE WARRANTY**

Guaranteed at designated point only, and contingent on:

Proper flow to pump suction
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

| CURVE NO. | IMPELLER NO. | IMPELLER DIA. | TAKEN FROM |
|---|---|---|---|
| 1 | 2616866 | 15 3/8" x 17" | 33444 |
| 2 | 2616866 | 14 1/2" x 16" | 33460 |
| 3 | 2616866 | 13 5/8" x 15" | |
| 4 | | | |

Customer _____

Item _____

Peerless Ref. No: _____

**Laboratory Performance**

BOWL 2614320 CI PLASTIC COATED

SIZE 24HXB | RPM 880 | CURVE 2840542

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED BOWL☐ FIELD☐ PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____