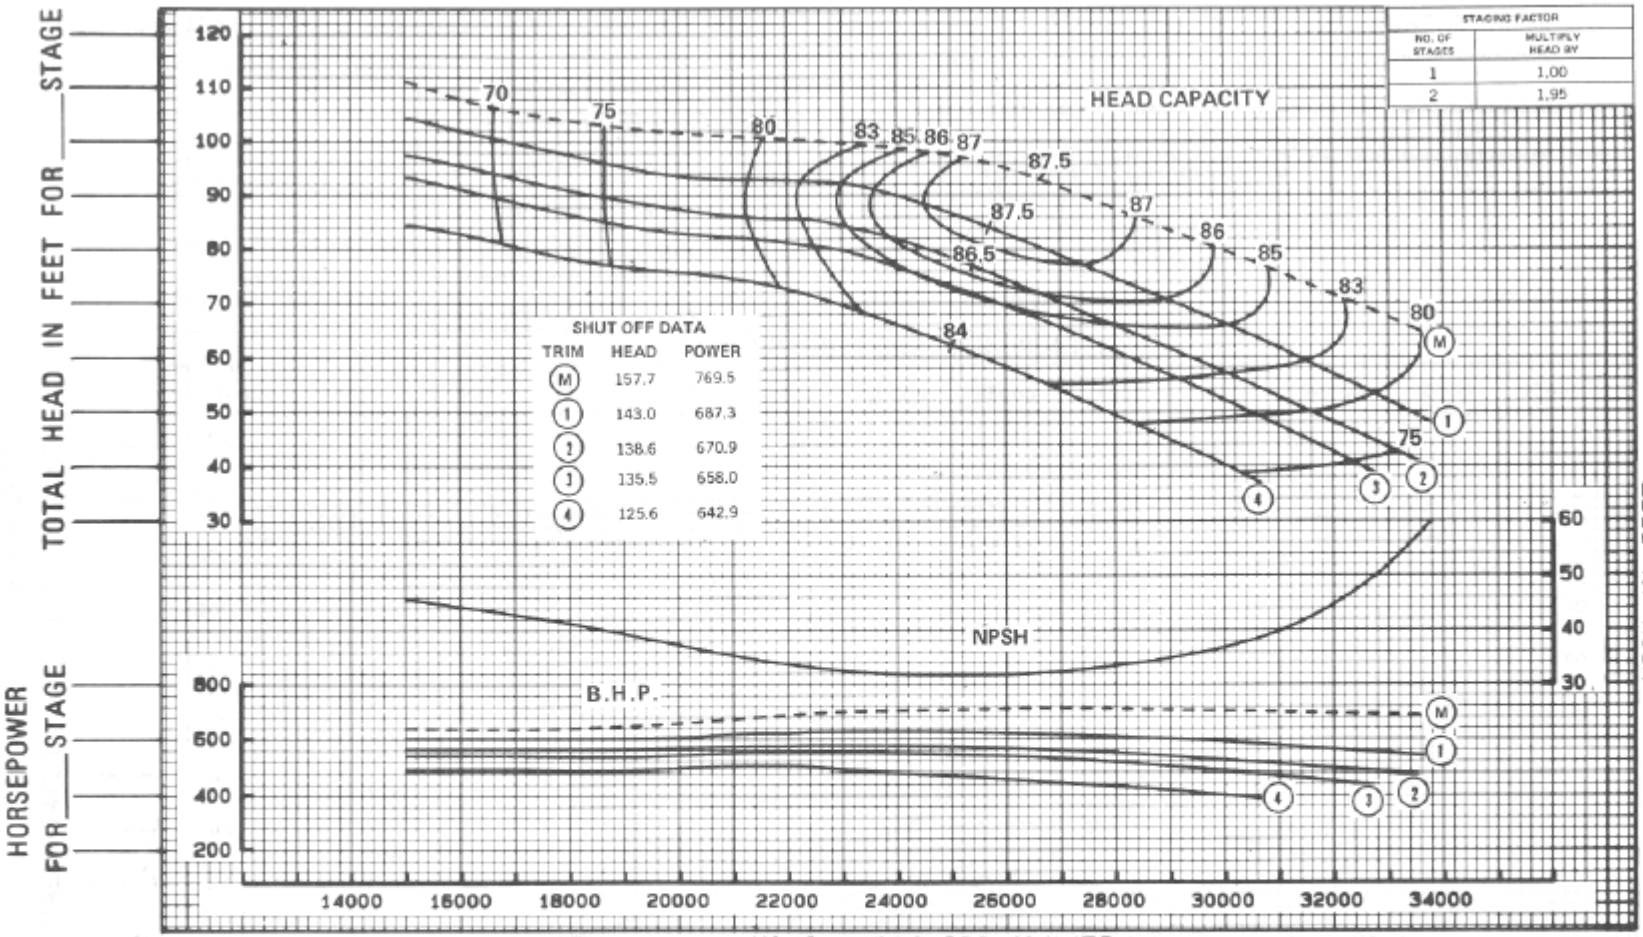


STAGING FACTOR	
NO. OF STAGES	MULTIPLY HEAD BY
1	1.00
2	1.95

SHUT OFF DATA

TRIM	HEAD	POWER
M	157.7	769.5
1	143.0	687.3
2	138.6	670.9
3	135.5	658.0
4	125.6	642.9

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

Proper flow to pump suction
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	2621980	20" x 26-1/8"	37695
2	2621980	18-9/16" x 25-25/32"	37701
3	2621980	18" x 25-13/32"	37710
4	2621980	17-1/8" x 25"	37721
M	2621980	FULL DIAMETER EXTENDED PERFORMANCE	58357

Customer _____

Item _____

Peerless Ref. No:

Laboratory Performance BOWL 2621982CI PLASTIC COATED

SIZE 36HH RPM 885 CURVE 4806330

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED BOWL ☐ FIELD ☐ PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____