


Fig. 6310 PROPELLER PUMP PERFORMANCE CHART

1. The propeller pump performance curves shown are obtained by testing pumps with short column and enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange. For further details refer to data page.
2. Discharge column losses should be added when settings are deeper than 10 feet. Refer to data page.
3. For velocity head refer to data page.

*100C-413 PUMP HEADINGS
MIN. OF 2920 GPM AT 5' TDH, 1-1-1951*

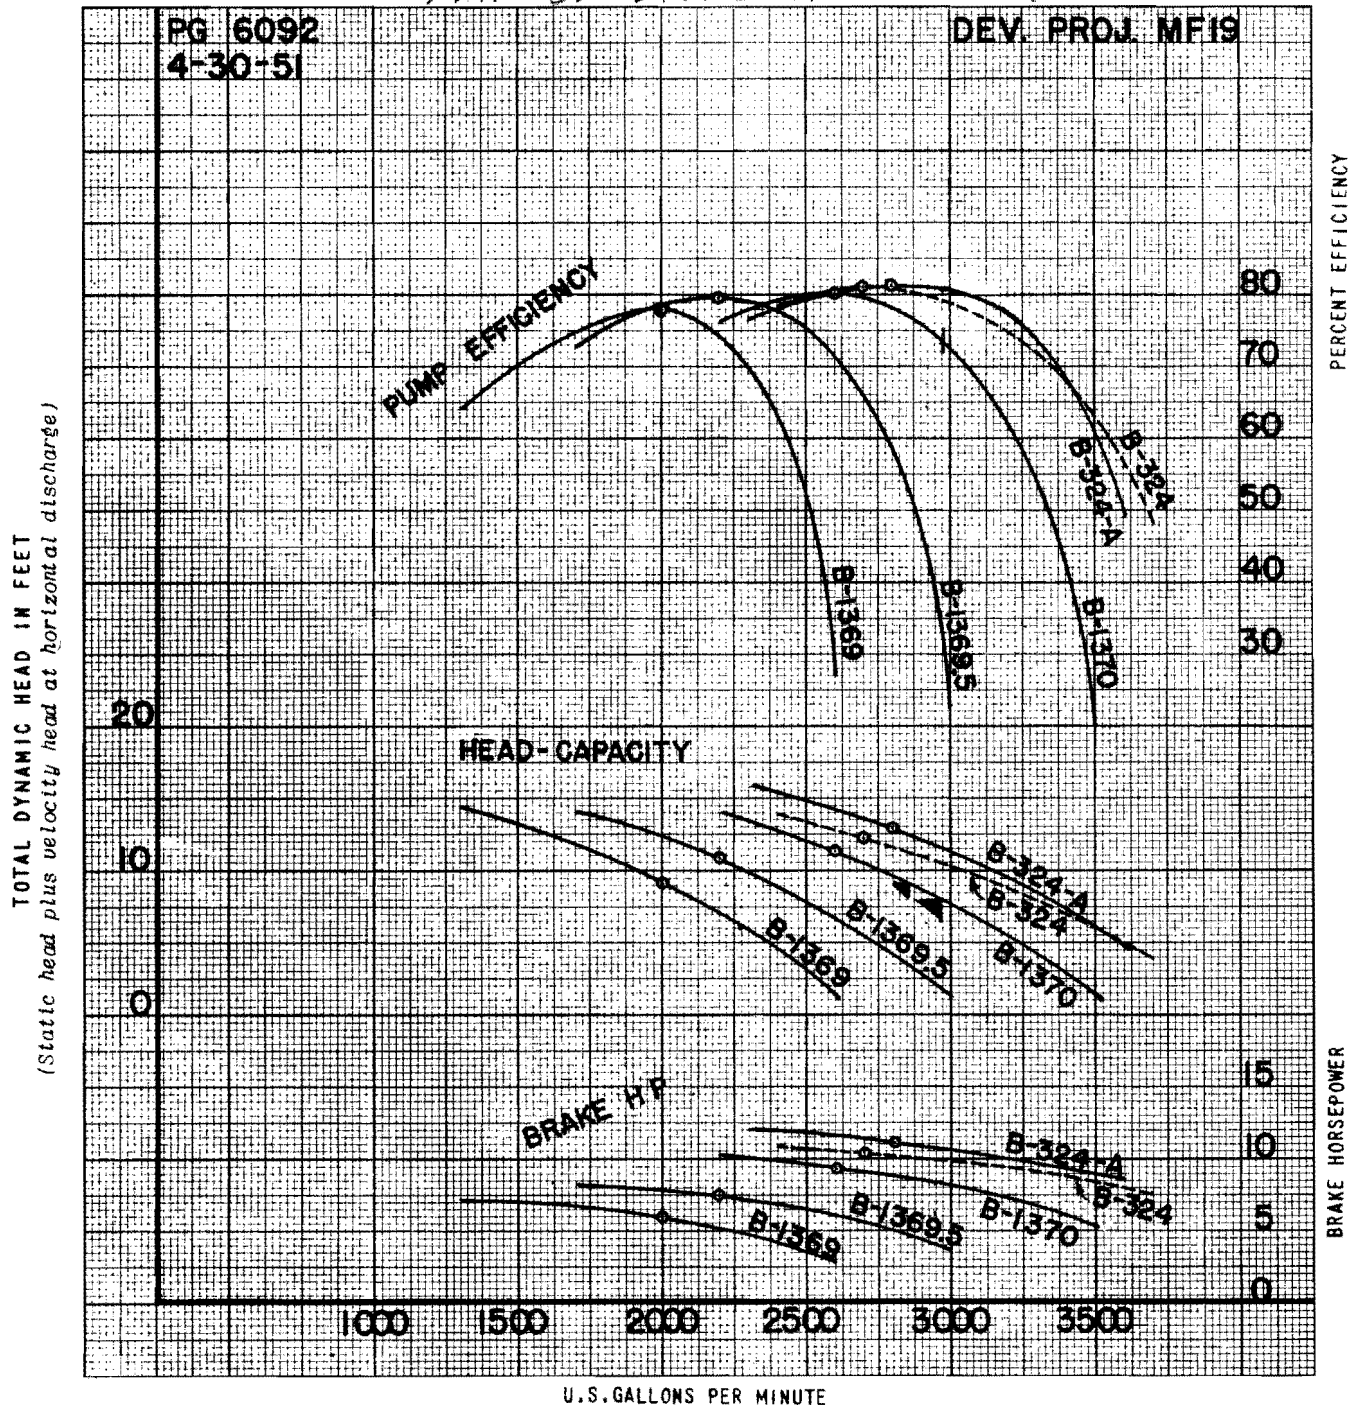

12" 6310

12" COLUMN


1160 RPM

ONE STAGE

PROPELLERS
B1369 B1370
B1369.5 B324
B324-A

Fig.6310 PROPELLER PUMP PERFORMANCE CHART

1. The propeller pump performance curves shown are obtained by testing pumps with short column and enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange. For further details refer to data page.
2. Discharge column losses should be added when settings are deeper than 10 feet. Refer to data page.
3. For velocity head refer to data page.

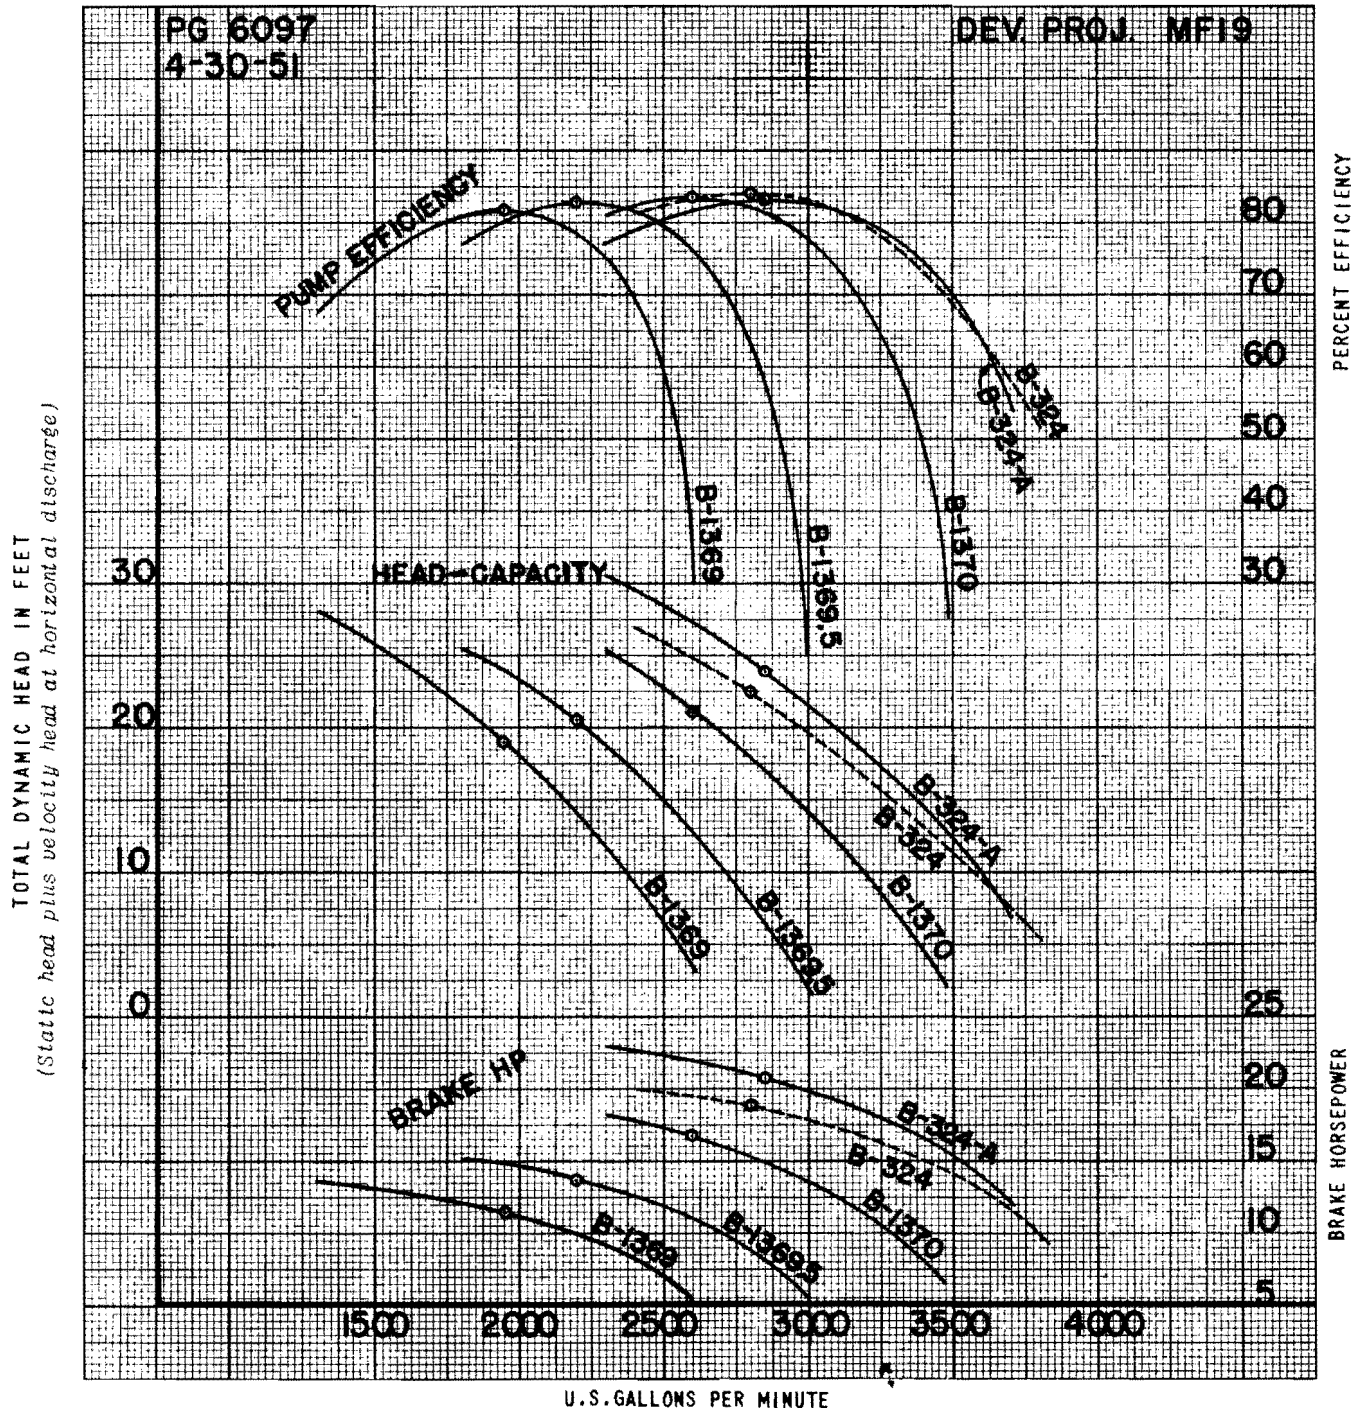

12" 6310

12" COLUMN

1160 RPM

TWO STAGE

PROPELLERS
B1369 B1370
B1369.5 B324
B324-A