


Fig.6310 PROPELLER PUMP PERFORMANCE CHART

18 INCH
1160 R.P.M.
GROUP 92
PAGE 18-20

1. The propeller pump performance curves shown are obtained by testing pumps with 10 foot column including enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange.
2. Discharge column losses should be added when settings are deeper than 10 feet.

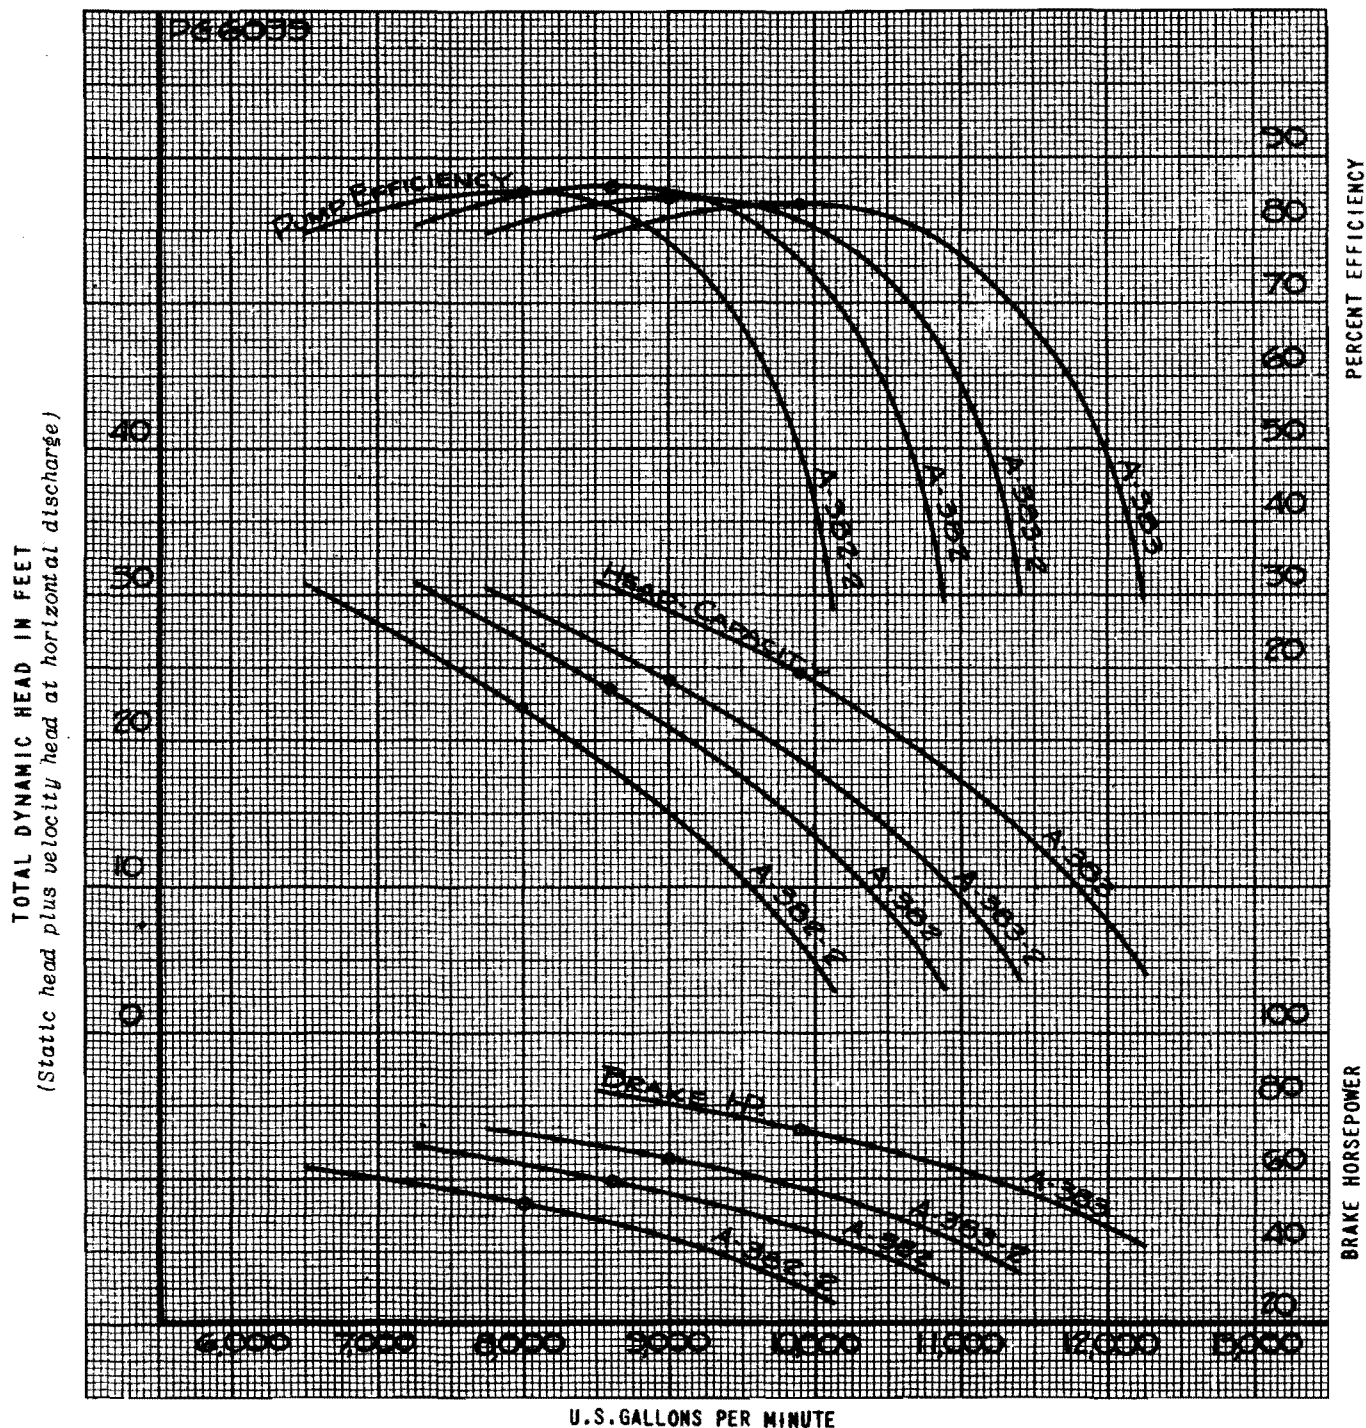

18"

6310

18" O. D. COLUMN


1160 R. P. M.

ONE STAGE

CODE WYTAS

Fig. 6310 PROPELLER PUMP PERFORMANCE CHART

1. The propeller pump performance curves shown are obtained by testing pumps with short column and enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange. For further details refer to data page D6310A5.
2. Discharge column losses should be added when settings are deeper than 10 feet. Refer to data page D6310A6
3. For velocity head refer to data page D6310A5

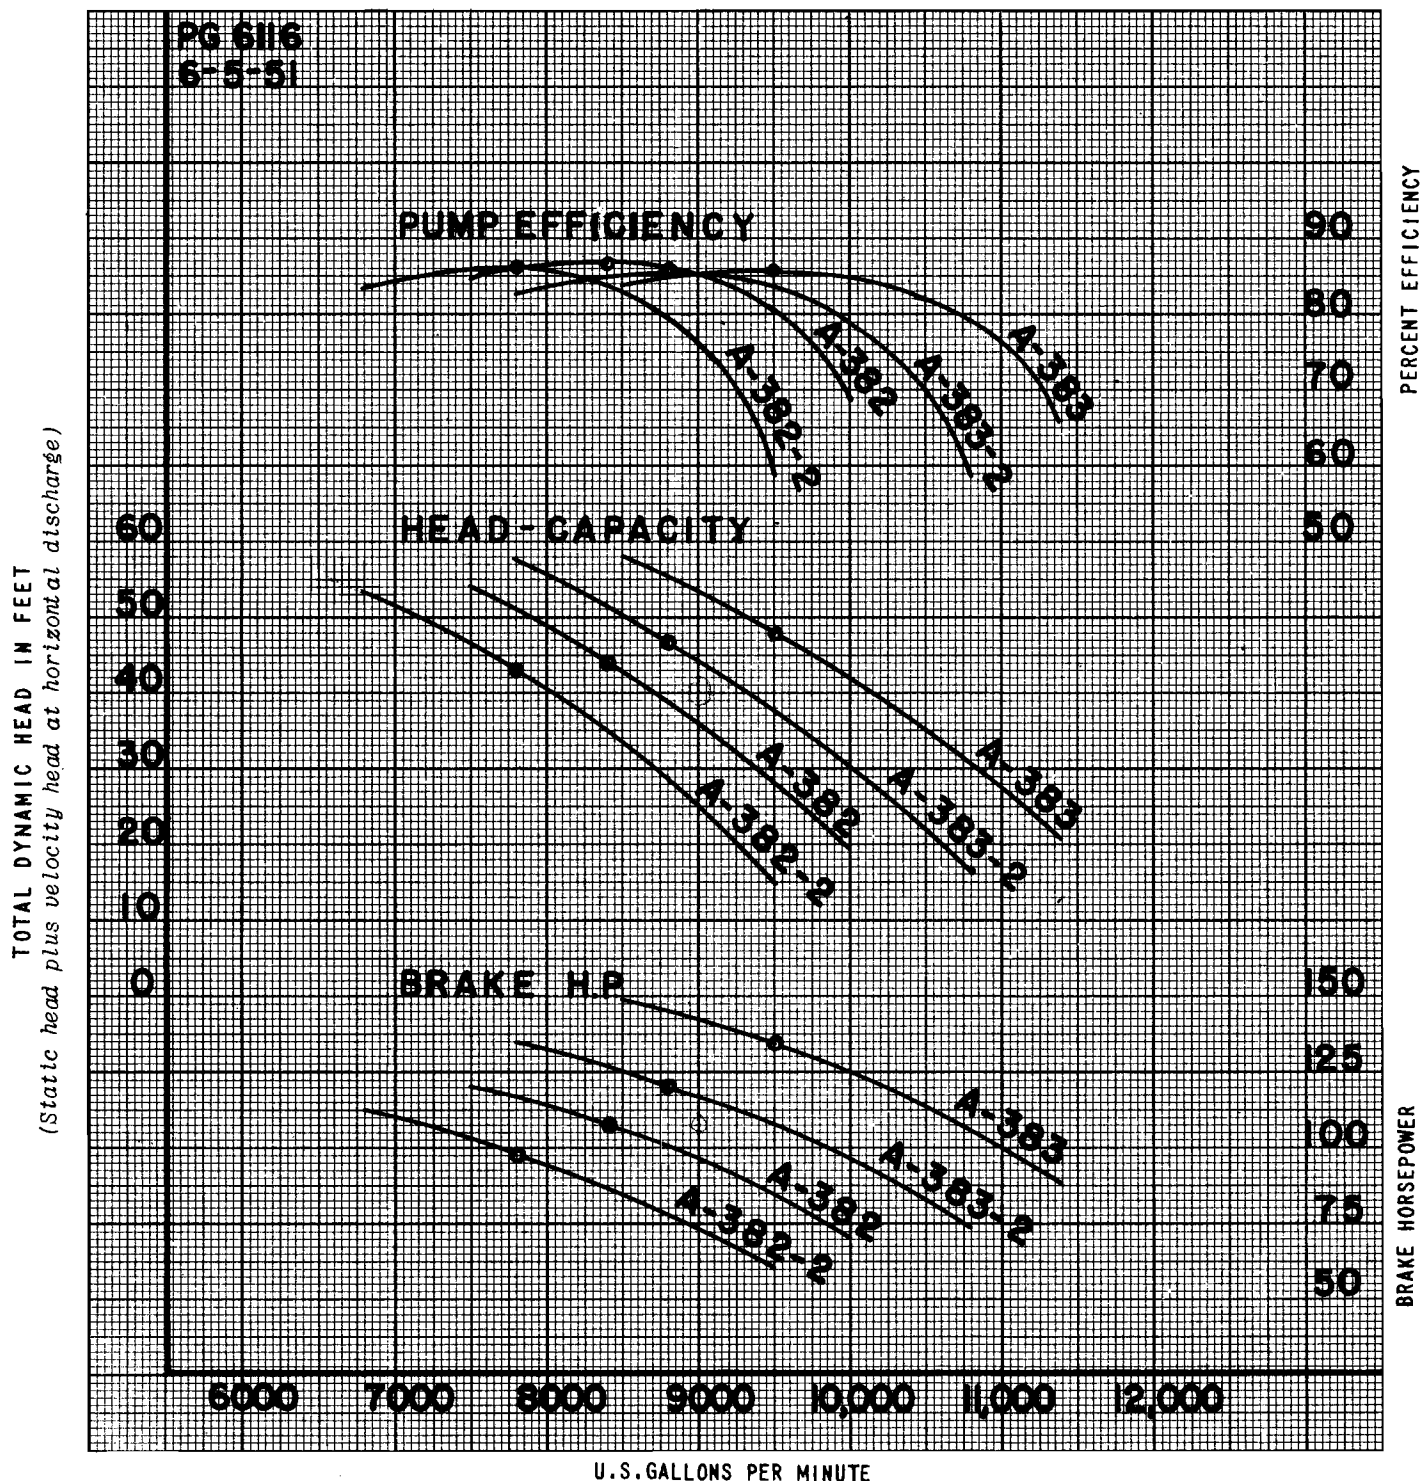

18" 6310 18" COLUMN 1160 RPM TWO STAGE