


VERTICAL TURBINE PUMPS SINGLE STAGE PERFORMANCE

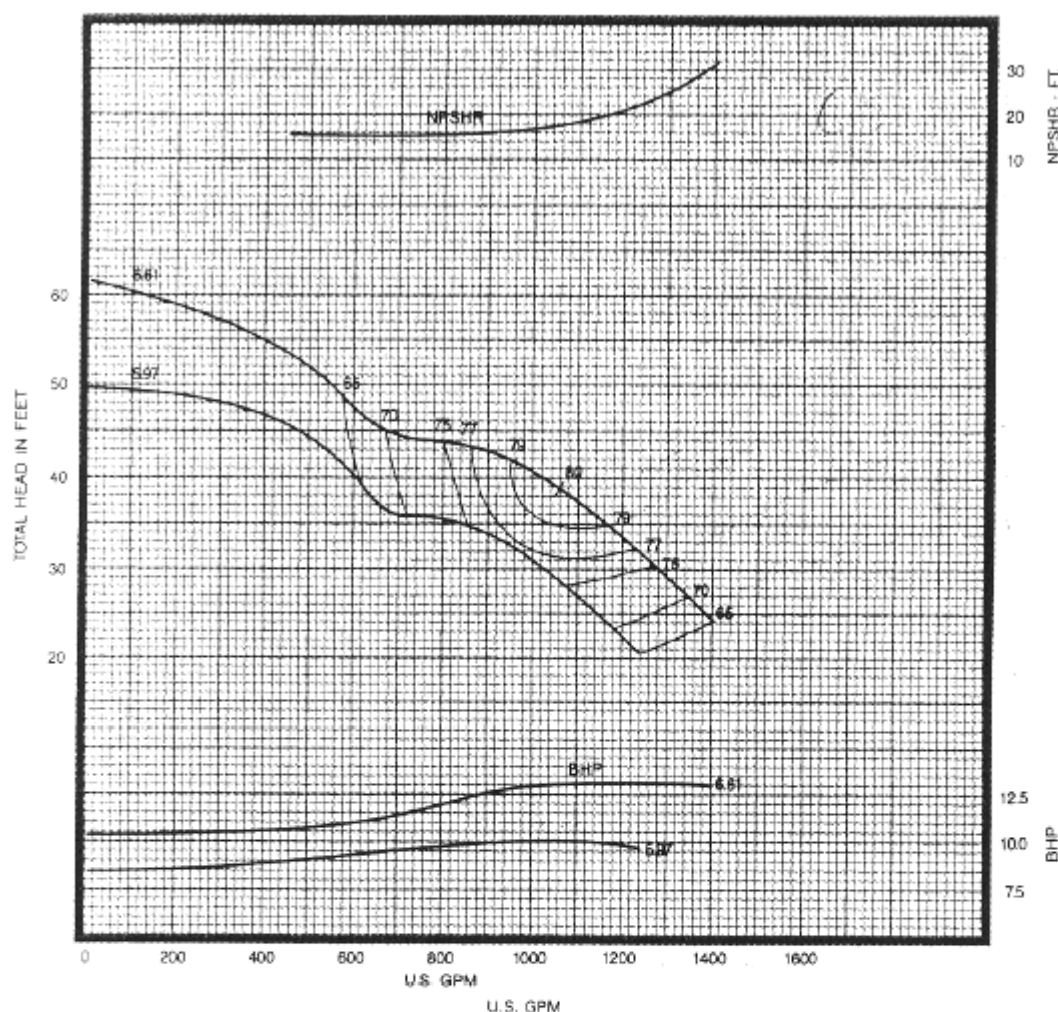

**10XH
7000
1770
RPM**

ENCLOSED
IMPELLED
T9DA268A

EFFICIENCY CORRECTIONS⁽¹⁾


NUMBER OF STAGES	EFFICIENCY CHANGE
1	-4.0 POINTS
2	-3.0 POINTS
3	-2.0 POINTS
4	-1.0 POINTS
5	NO CHANGE
6 OR MORE	NO CHANGE

BOWL MATERIAL	EFFICIENCY CHANGE
CAST IRON	-2.0 POINTS
ENAMELED C.I.	NO CHANGE

IMPELLER MATERIAL	EFFICIENCY CHANGE
CAST IRON	-2.0 POINTS
BRONZE	NO CHANGE
ENAMELED C.I.	NO CHANGE

(1) Refer to "Application and Reference Data" for head correction.

DIMENSIONS (Inches)

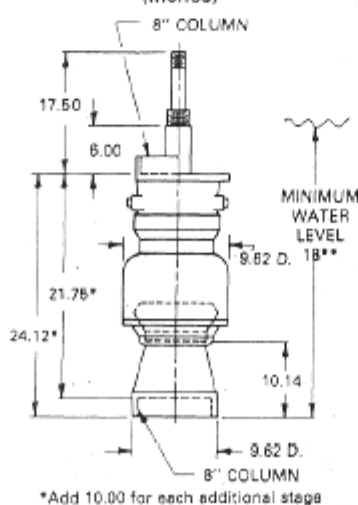

TECHNICAL DATA

DATA	VALUE
MAXIMUM OPERATING SPEED	2700 RPM
MAXIMUM NUMBER OF STAGES	15**
PUMP SHAFT DIAMETER	1 7/8 IN.
IMPELLER EYE AREA	22.42 SQ. IN.
MAXIMUM SPHERE SIZE	68 IN.
K _t (THRUST FACTOR)	8.32 LBS./FT.
K _r (ROTOR WT. PER STAGE)	10.00 LBS.
BOWL WT. (FIRST STAGE)	200 LBS.
BOWL WT. (EACH ADD'L. STAGE)	65 LBS.
ALLOWABLE SHAFT STRETCH	.72 IN. **
WK ² (FIRST STAGE)	1.32 LBS.-FT. ²
WK ² (EACH ADD'L. STAGE)	1.30 LBS.-FT. ²
BOWL RING CLEARANCE	.014/.020 IN.

** These are nominal values. Refer to "Application and Reference Data" for information further limiting or extending these values.

*** This value is the minimum submergence required to prevent vortexing only. This value may need to be increased to provide adequate NPSHA.