


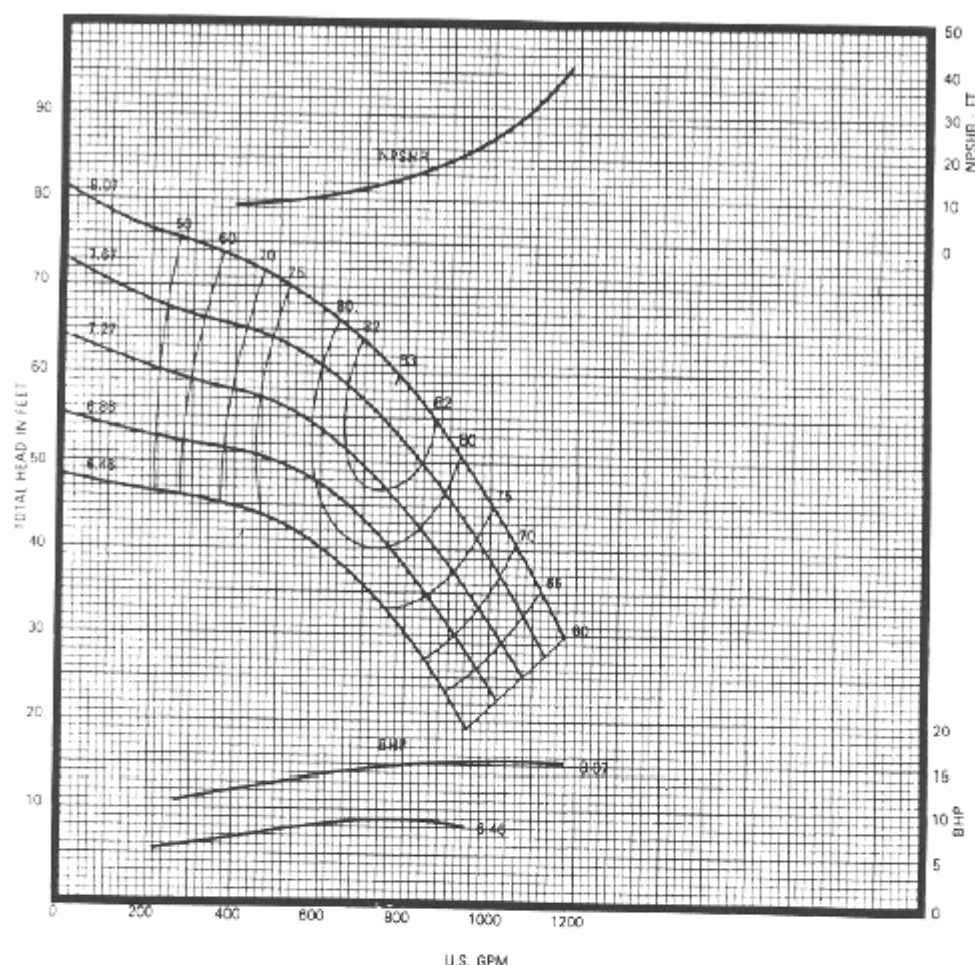

**11M
7000
1770
RPM**

ENCLOSED
IMPELLER
T7DKA92

EFFICIENCY CORRECTIONS¹⁾


NUMBER OF STAGES	EFFICIENCY CHANGE
1	-2.5 POINTS
2	-1.5 POINTS
3	-0.5 POINTS
4	NO CHANGE
5	NO CHANGE
6 OR MORE	NO CHANGE

BOWL MATERIAL	EFFICIENCY CHANGE
CAST IRON	-2.0 POINTS
ENAMELED C.I.	NO CHANGE

IMPELLER MATERIAL	EFFICIENCY CHANGE
CAST IRON	-1.0 POINTS
BRONZE	NO CHANGE
ENAMELED C.I.	NO CHANGE

¹⁾ Refer to "Application and Reference Data" for head correction.

DIMENSIONS (Inches)

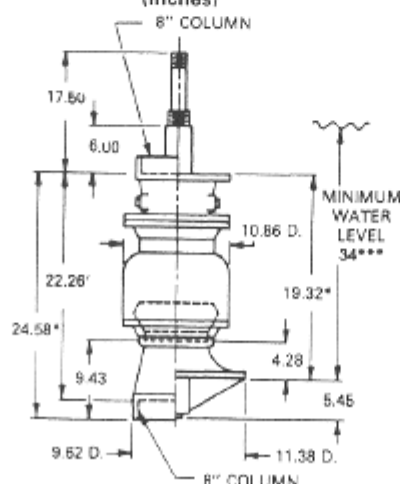

*Add 9.50 for each additional stage.

TECHNICAL DATA

DATA	VALUE
MAXIMUM OPERATING SPEED	2500 RPM
MAXIMUM NUMBER OF STAGES	14**
PUMP SHAFT DIAMETER	1 7/8 IN.
IMPELLER EYE AREA	14.86 SQ. IN.
MAXIMUM SPHERE SIZE	81 IN.
K _t (THRUST FACTOR)	5.02 LBS./FT.
K _r (ROTOR WT. PER STAGE)	22 LBS.
BOWL WT. (FIRST STAGE)	240 LBS.
BOWL WT. (EACH ADD'L. STAGE)	75 LBS.
ALLOWABLE SHAFT STRETCH	.88 IN. **
WK ³ (FIRST STAGE)	1.03 LBS.-FT. ²
WK ³ (EACH ADD'L. STAGE)	1.00 LBS.-FT. ²
BOWL RING CLEARANCE	.014/.018 IN.

** These are nominal values. Refer to "Application and Reference Data" for information further limiting or extending these values.

*** This value is the minimum submergence required to prevent vortexing only. This value may need to be increased to provide adequate NPSHA.

FAIRBANKS MORSE PUMPS