


Fig. 6310 PROPELLER PUMP PERFORMANCE CHART

20 INCH  
580 R.P.M.  
GROUP 92  
PAGE 20-30

1. The propeller pump performance curves shown are obtained by testing pumps with 10 foot column including enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange.
2. Discharge column losses should be added when settings are deeper than 10 feet.

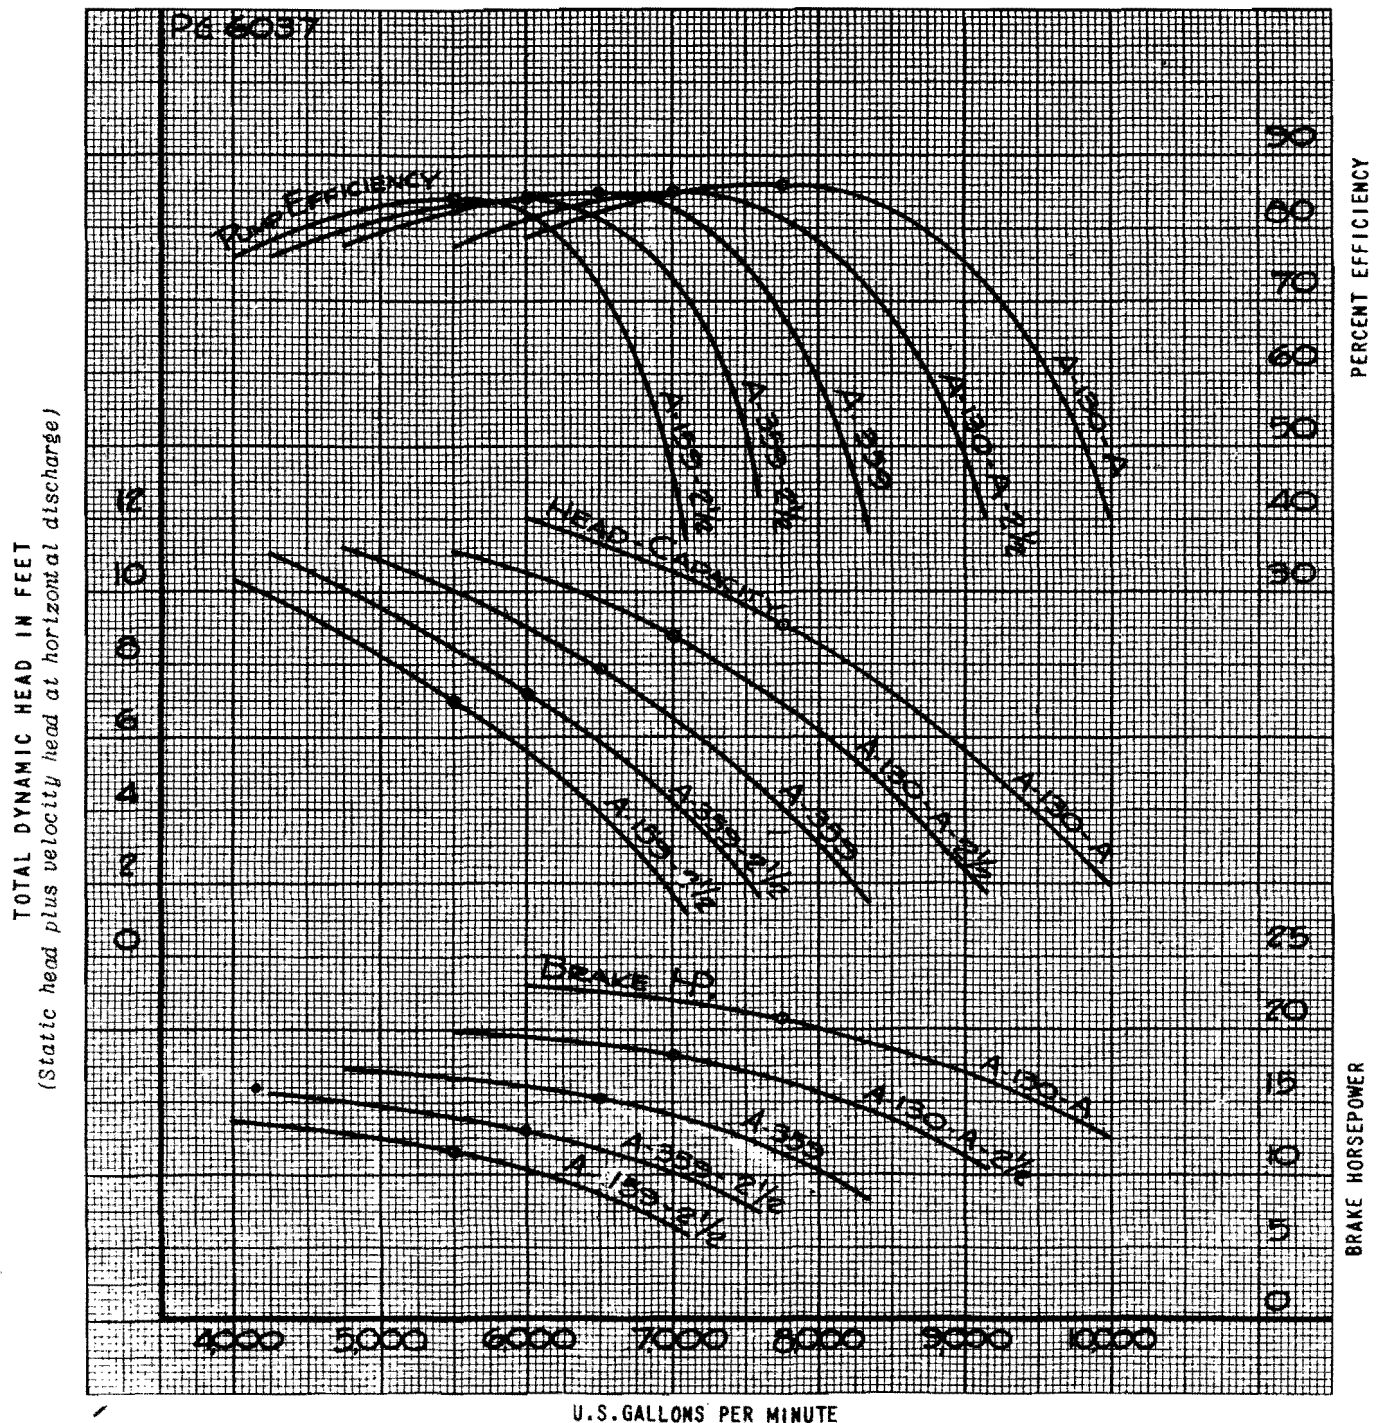


20" 6310 20" O. D. COLUMN 580 R.P.M. ONE STAGE CODE WYTLD

Fig.6310 PROPELLER PUMP PERFORMANCE CHART

20 INCH  
580 R.P.M.  
GROUP 92  
PAGE 20-31

1. The propeller pump performance curves shown are obtained by testing pumps with 10 foot column including enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange.
2. Discharge column losses should be added when settings are deeper than 10 feet.

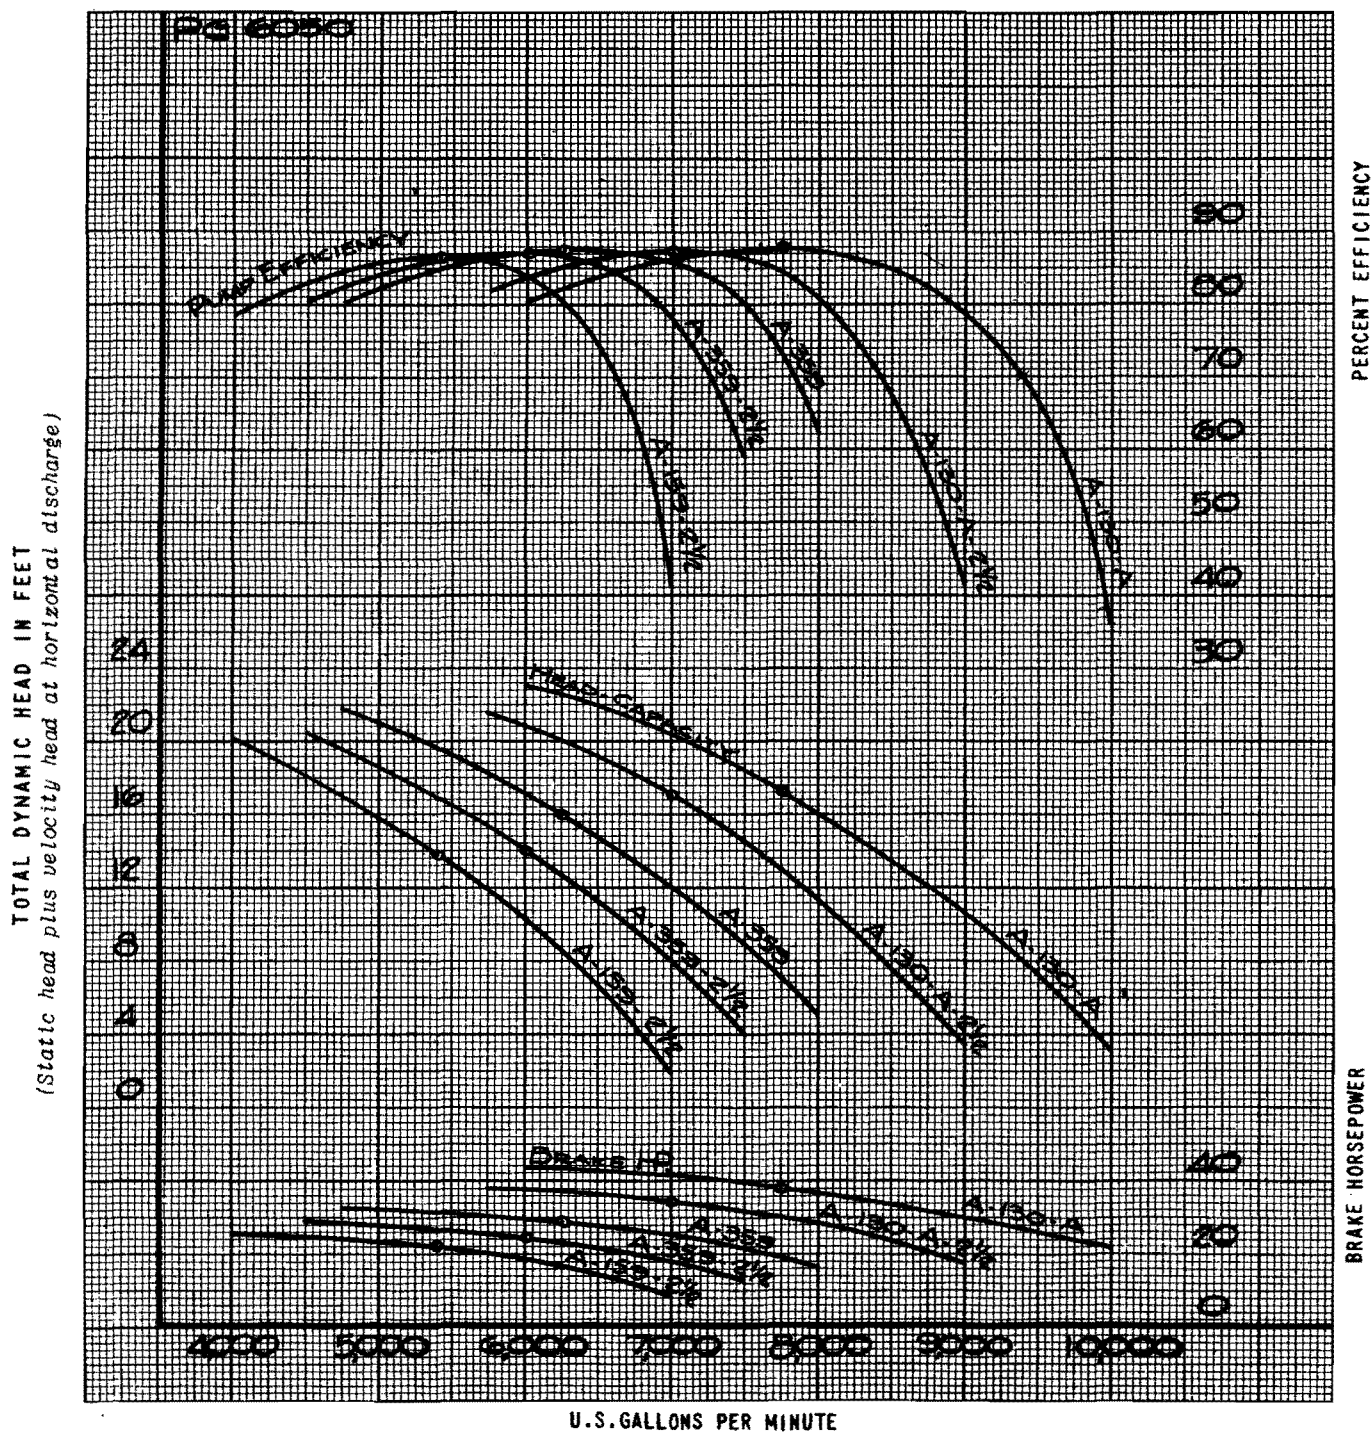

|     |      |                  |              |           |      |       |
|-----|------|------------------|--------------|-----------|------|-------|
| 20" | 6310 | 20" O. D. COLUMN | 580 R. P. M. | TWO STAGE | CODE | WYTSK |
|-----|------|------------------|--------------|-----------|------|-------|