


VERTICAL TURBINE PUMPS SINGLE STAGE PERFORMANCE

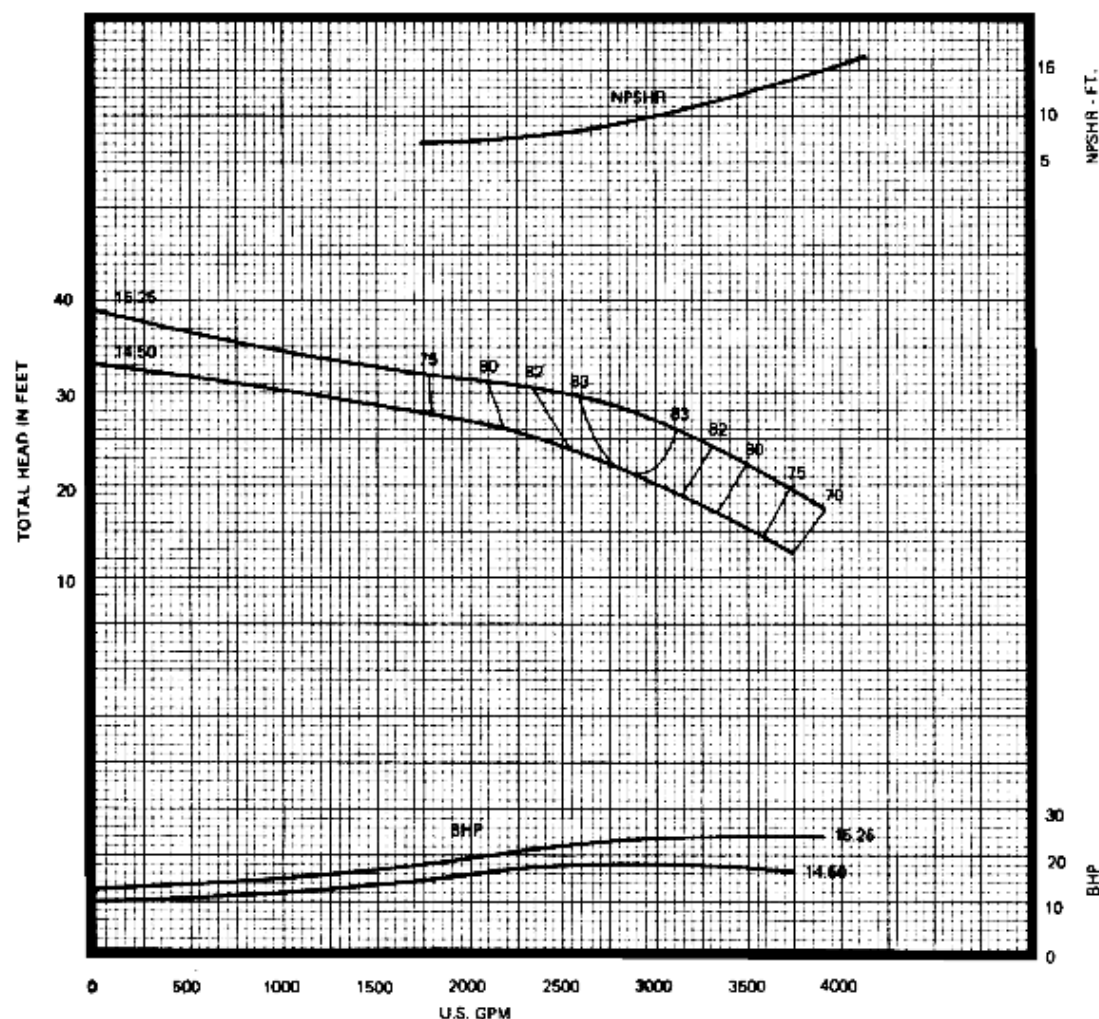

**20H
6920**

**705
RPM**

**IMPELLER
T5LB99**


EFFICIENCY CORRECTIONS (1)

NUMBER OF STAGES	EFFICIENCY CHANGE
1	- 1.0 POINTS
2	NO CHANGE
3	NO CHANGE
4	NO CHANGE
5	NO CHANGE
6 OR MORE	NO CHANGE

BOWL MATERIAL	EFFICIENCY CHANGE
CAST IRON	- 1.0 POINTS
EPOXIED C.I.	NO CHANGE

IMPELLER MATERIAL	EFFICIENCY CHANGE
CAST IRON	- 1.0 POINTS
BRONZE	NO CHANGE
EPOXIED C.I.	NO CHANGE

DIMENSIONS (Inches)

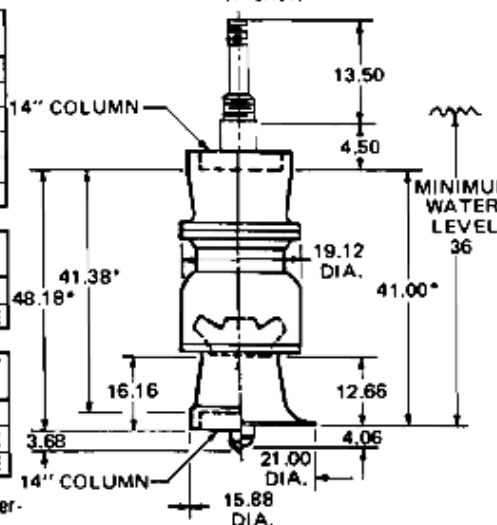

TECHNICAL DATA

DATA	VALUE
MAXIMUM OPERATING SPEED	1500 RPM
MAXIMUM NUMBER OF STAGES	12**
PUMP SHAFT DIAMETER	2 1/16 IN.
IMPELLER EYE AREA	74.80 SQ. IN.
MAXIMUM SPHERE SIZE	1.25 IN.
K _t (THRUST FACTOR)	28 LBS./FT.
K _a (ROTOR WT. PER STAGE)	87 LBS.
BOWL WT. (FIRST STAGE)	1000 LBS.
BOWL WT. (EACH ADD'L. STAGE)	475 LBS.
ALLOWABLE SHAFT STRETCH	.94 IN.**
WK ² (FIRST STAGE)	17.69 LBS.-FT. ²
WK ² (EACH ADD'L. STAGE)	17.04 LBS.-FT. ²
BOWL RING CLEARANCE	.015/.020 IN.

**These are nominal values. Refer to "Application and Reference Data" for information further limiting or extending these values.

(1) Refer to "Application and Reference Data" for head correction.

*Add 15.88 for each additional stage.

FAIRBANKS MORSE PUMPS