

PIONEER

CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	3
2	2
3	1

PAGE: 5300-44


DATE: 4-3-80

HEAD
IN
FEET

SINGLE STAGE WATER PERFORMANCE WITHOUT COLUMN CORRECTIONS

10 HH

1760 R.P.M.

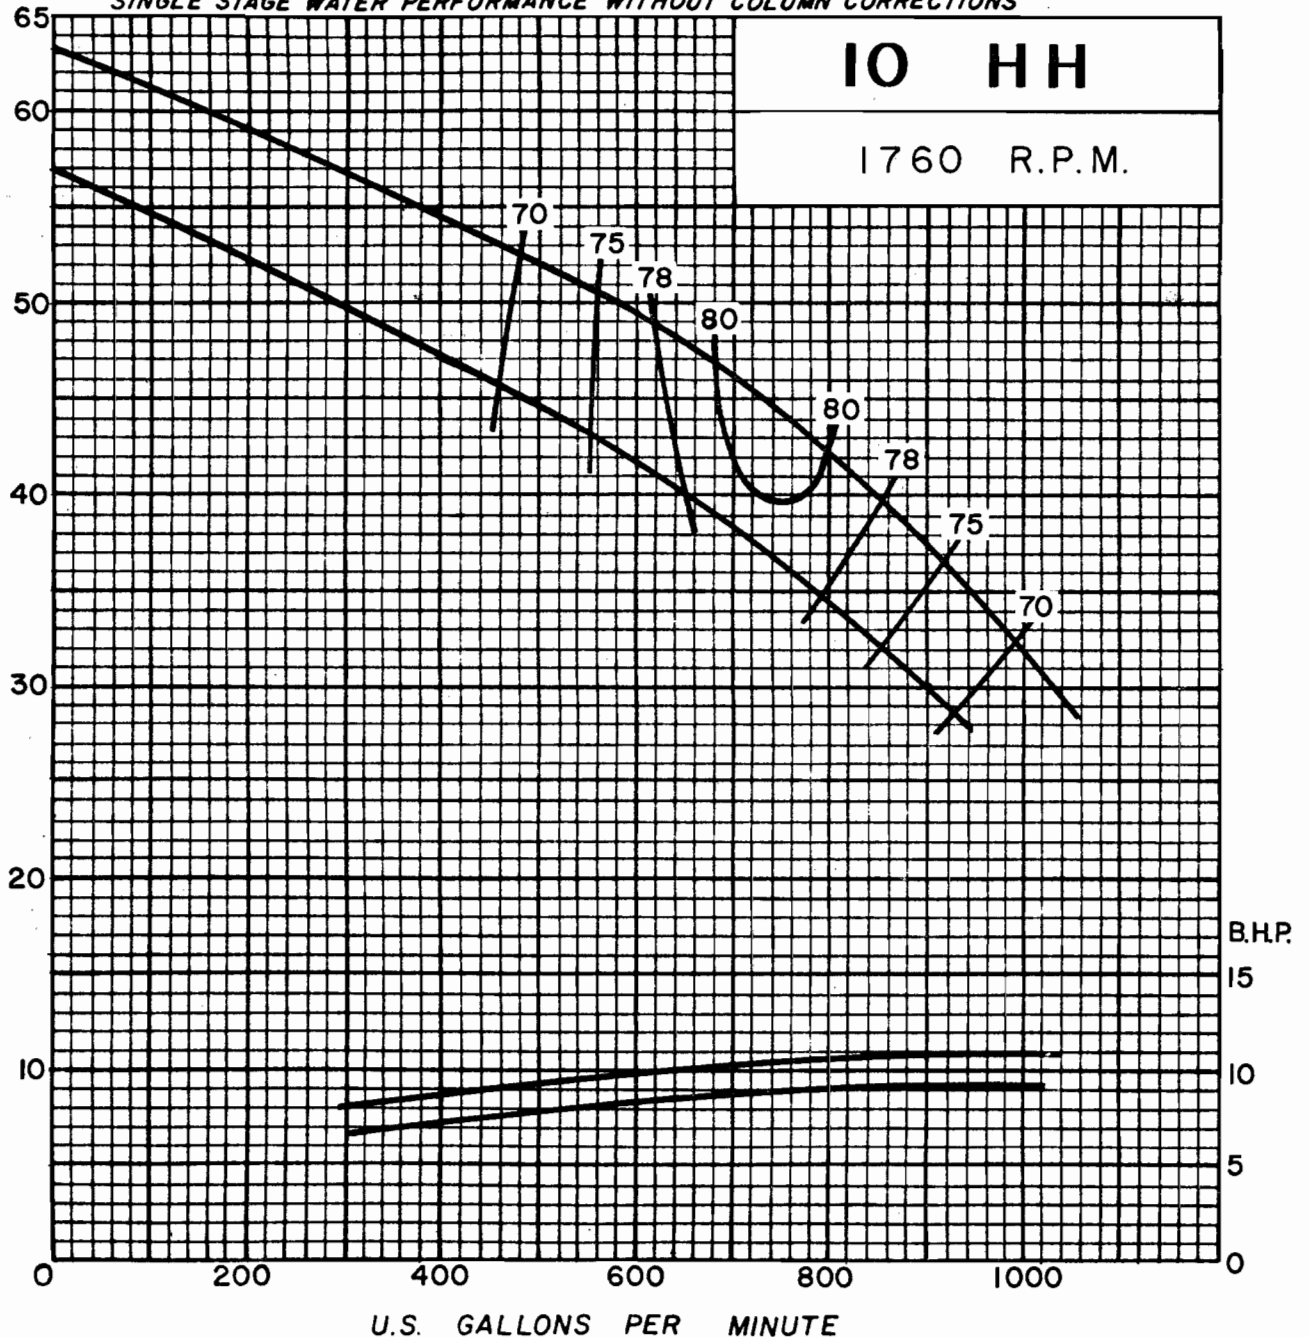

IMPELLER NO. 23299
 IMPELLER WT.-LBS. 15
 IMPELLER EYE AREA 11.9
 ST'D SUCT. SIZES 6
 ST'D DISCH. SIZES 6-8
 MAX. PRESSURE-PSI 525
 MAX. NO. OF STAGES 19
 THRUST FACTOR 8.34

ONE STAGE WT.-LBS. 235
 ADD'L STAGE WT.-LBS. 60
 SHAFT DIA. 1-11/16
 LATERAL 3/4 1/2
 MAX. SPHERE SIZE
 WR² PER STAGE-LB.-FT.²
 ADD 8 1/2 IN. PER STAGE

