

PIONEER

10HL


SELECTION CURVES

PAGE: 400-050

DATE: 5-20-81

SUPERSEDES: NEW



1760 R.P.M.

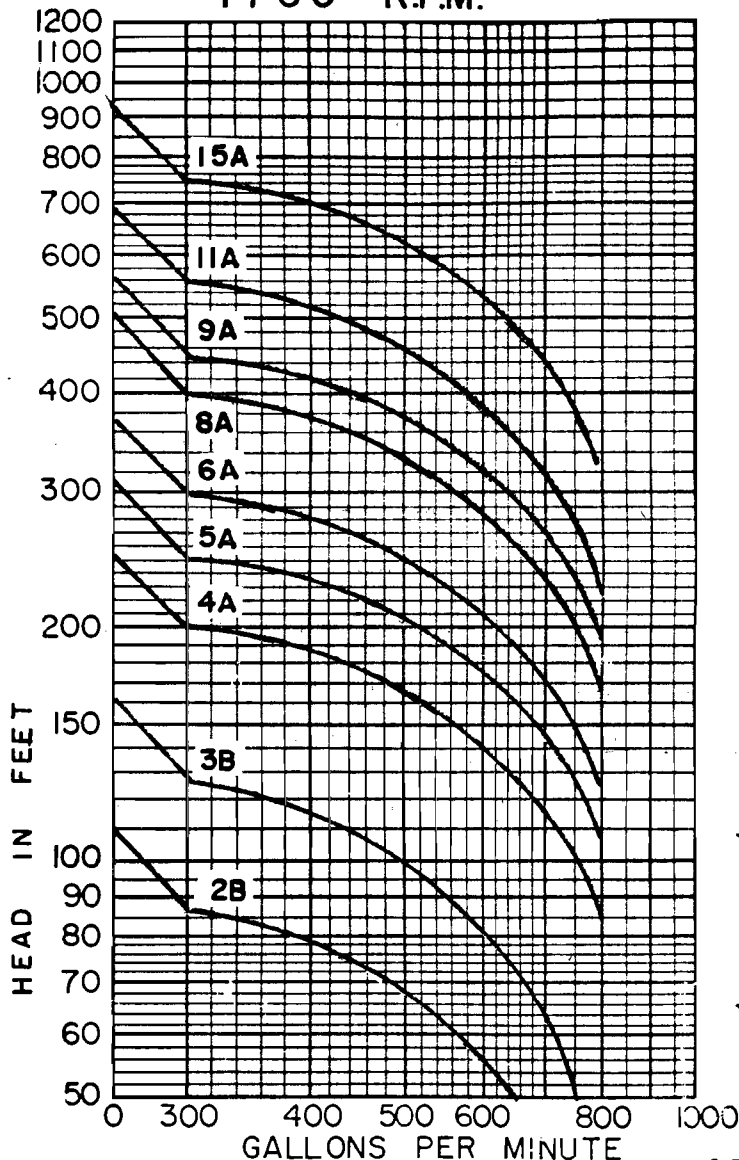

STGS.	MODEL	HP	VOLTS	F.
2B	10HL34L	10	460	18
3B	10HL34M	15	460	26
4A	10HL34P	25	460	42
5A	10HL34R	30	460	47
6A	10HL34S	40	460	64
8A	10HL34T	50	460	79
9A	10HL34U	60	460	95
11A	10HL34W	75	460	114
15A	10HL34Y	100	460	148

ENCLOSED IMPELLER

A	7.75 DIA.
B	7.25 DIA.
C	6.75 DIA.
23297 IMP.DRG.	8.34 K
23293 BOWL DRG.	1760 R.P.M.
9 3/8 BOWL DIA.	EYE AREA
CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINT
1	-4
2	-3
3	-2
4	-1

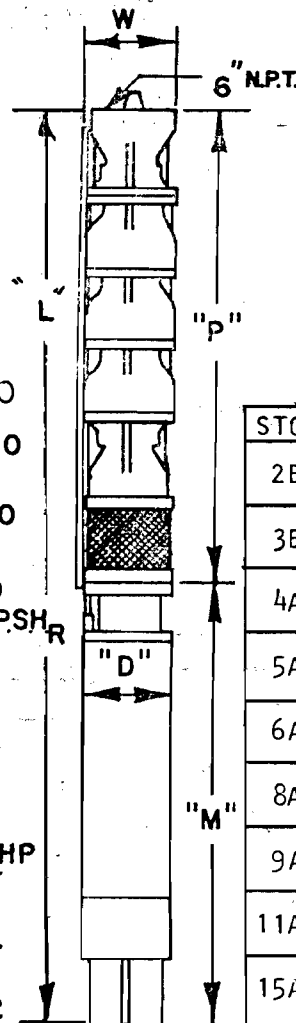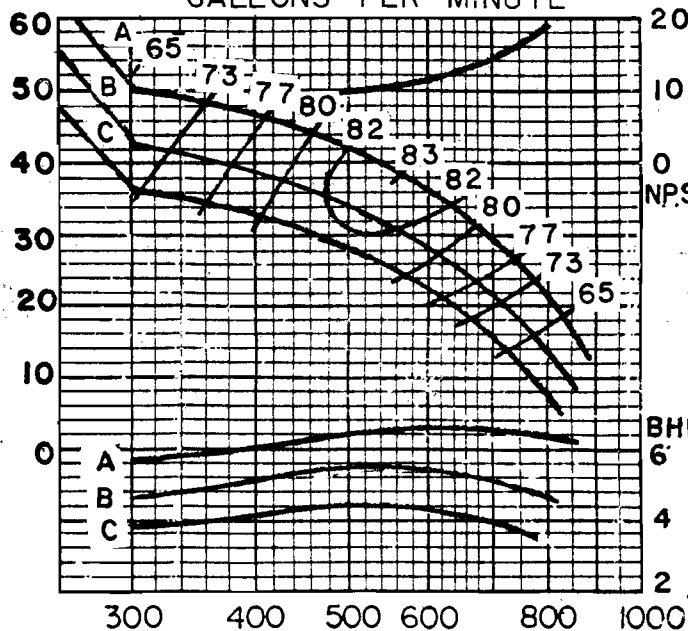

STGS.	D	M	P	L	W
2B	7 7/16	50	45 1/4	95 1/4	9 3/4
3B	7 7/16	52	53 7/8	105 7/8	9 3/4
4A	7 7/16	57	62 1/2	120 1/2	9 13/16
5A	7 7/16	60 1/4	71 1/8	131 3/8	9 13/16
6A	8 5/8	63	79 3/4	142 3/4	9 13/16
8A	8 5/8	68 1/8	97	165 1/8	9 7/8
9A	8 5/8	75 1/4	105 5/8	180 7/8	10 1/16
11A	10 7/16	77 1/2	122 7/8	200 3/8	10 1/16
15A	10 7/16	83 3/4	157 3/4	241 1/8	10 9/16