

# PIONEER

CHANGE IN  
EFFICIENCY

NO. OF  
STAGES

NO. OF  
POINTS

1

4

2

2

3

1

PAGE: 5300-59


DATE: 4-25-80

HEAD  
IN  
FEET

SINGLE STAGE WATER PERFORMANCE WITHOUT COLUMN CORRECTIONS

12 HH

1760 R.P.M.

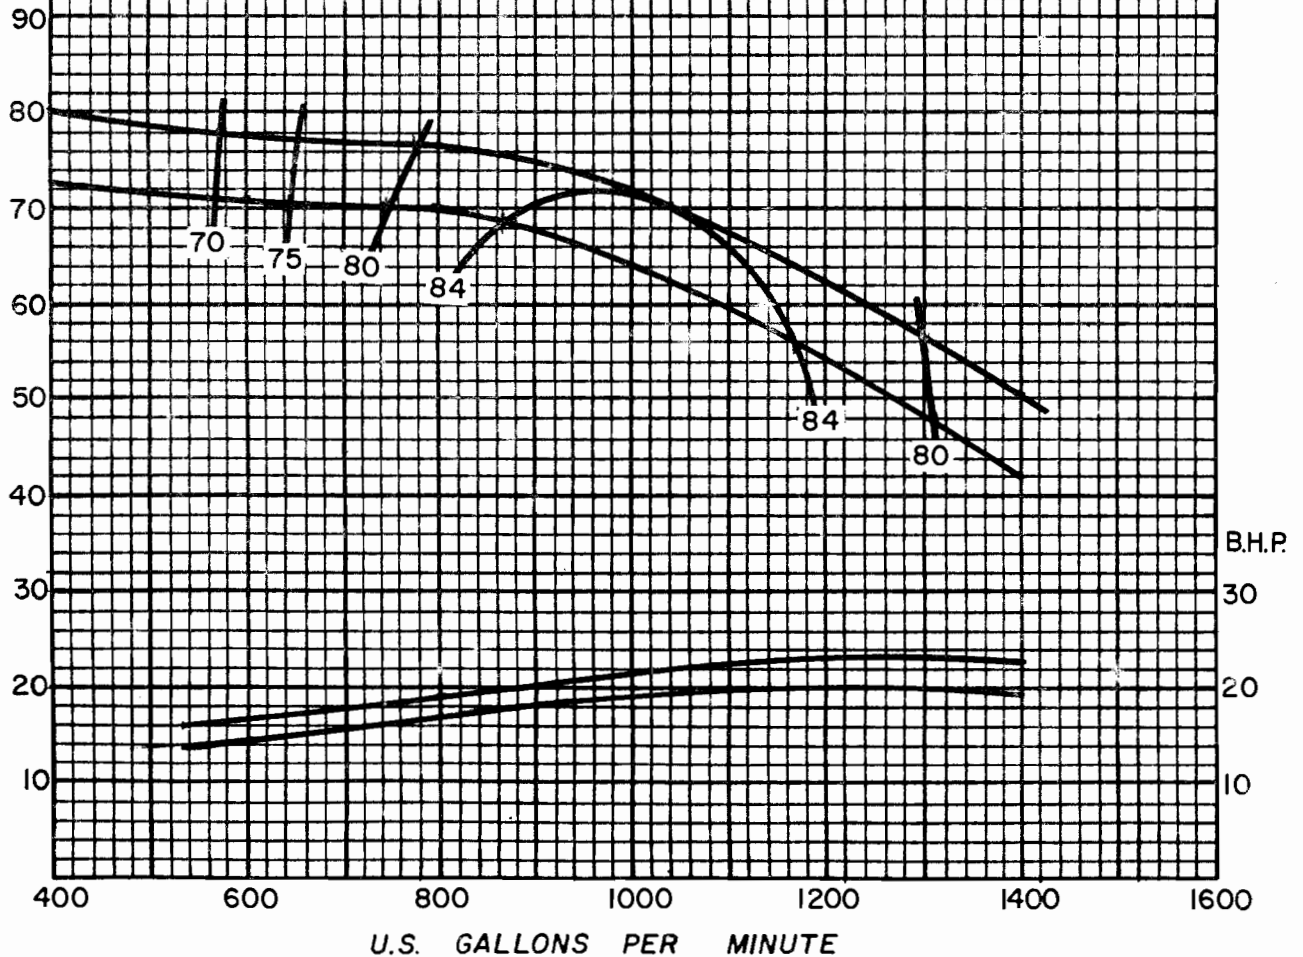

IMPELLER NO.  
IMPELLER WT.-LBS.  
IMPELLER EYE AREA  
ST'D SUCT. SIZES  
ST'D DISCH. SIZES  
MAX. PRESSURE-PSI  
MAX. NO. OF STAGES 13  
THRUST FACTOR 7.5

ONE STAGE WT.-LBS. 300  
ADD'L STAGE WT.-LBS. 100  
SHAFT DIA. 1-11/16  
LATERAL 3/4  
MAX. SPHERE SIZE  
WR<sup>2</sup> PER STAGE-LB.-FT.<sup>2</sup>  
ADD 9 1/2 IN. PER STAGE

