

PIONEER

CHANGE IN
EFFICIENCY

NO. OF STAGES	NO. OF POINTS
1	4
2	2
3	1

PAGE: 5300-53


DATE: 5-13-80

HEAD
IN
FEET

SINGLE STAGE WATER PERFORMANCE WITHOUT COLUMN CORRECTIONS

12 HL

1760 R.P.M.

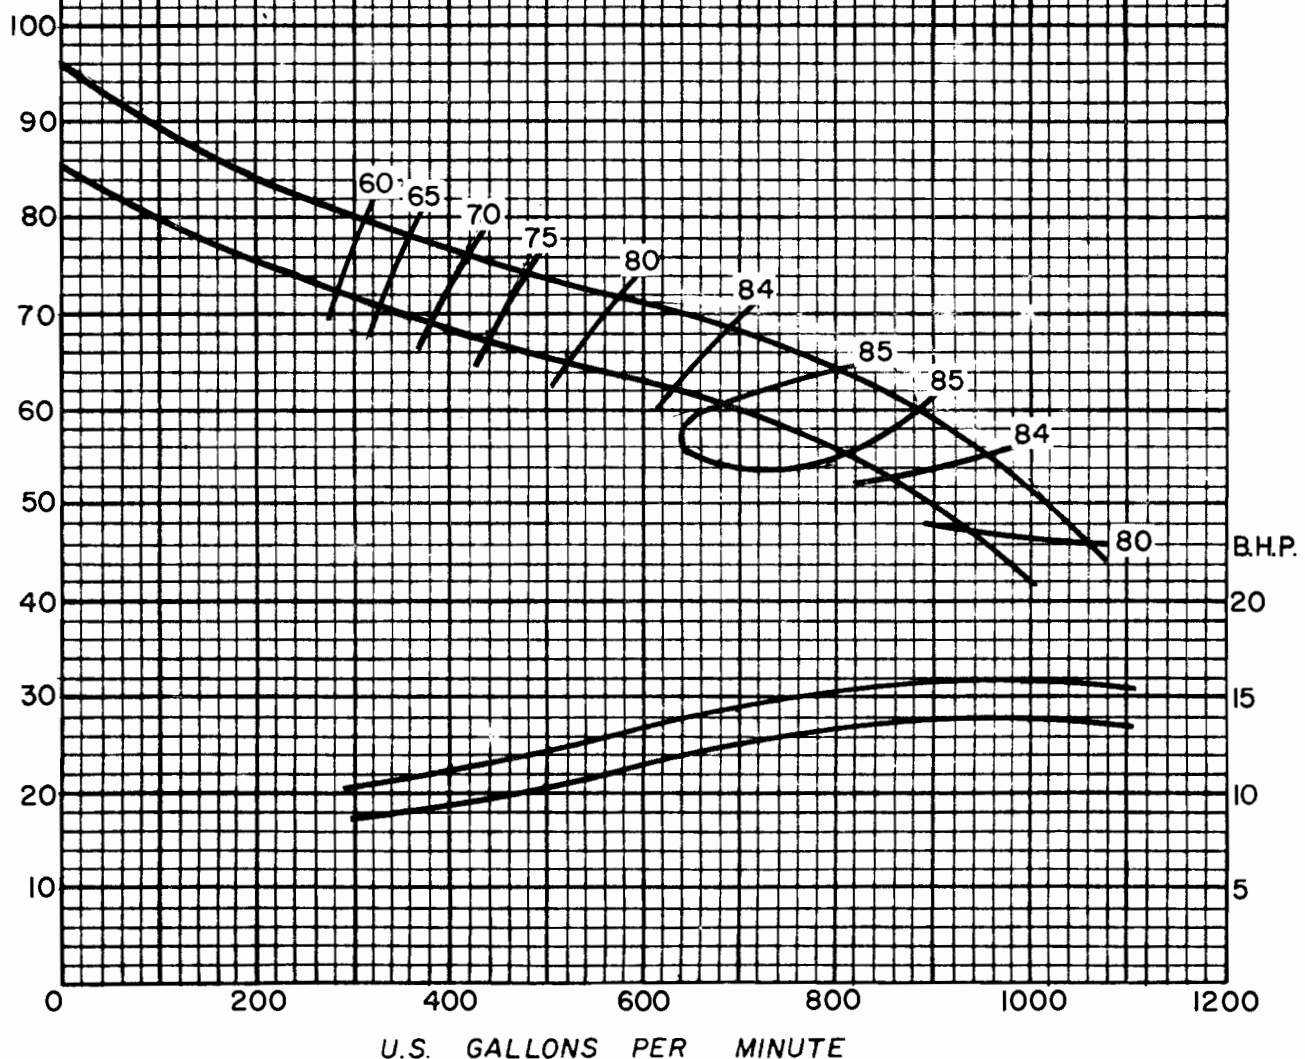

IMPELLER NO. 23300
IMPELLER WT.-LBS. 20
IMPELLER EYE AREA 13.9
ST'D SUCT. SIZES 8-10
ST'D DISCH. SIZES 8
MAX. PRESSURE-PSI 525
MAX. NO. OF STAGES 13
THRUST FACTOR 7.5

ONE STAGE WT.-LBS. 300
ADD'L STAGE WT.-LBS. 100
SHAFT DIA. 1-11/16
LATERAL 3/4
MAX. SPHERE SIZE 7/8
WR² PER STAGE-LB.-FT.² 0.95
ADD 9 1/2 IN. PER STAGE

