

PIONEER

CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	4
2	2
3	1


PAGE: 5300- 55
DATE: 4-14-80

HEAD
IN
FEET

SINGLE STAGE WATER PERFORMANCE WITHOUT COLUMN CORRECTIONS

12 HM

1760 R.P.M.

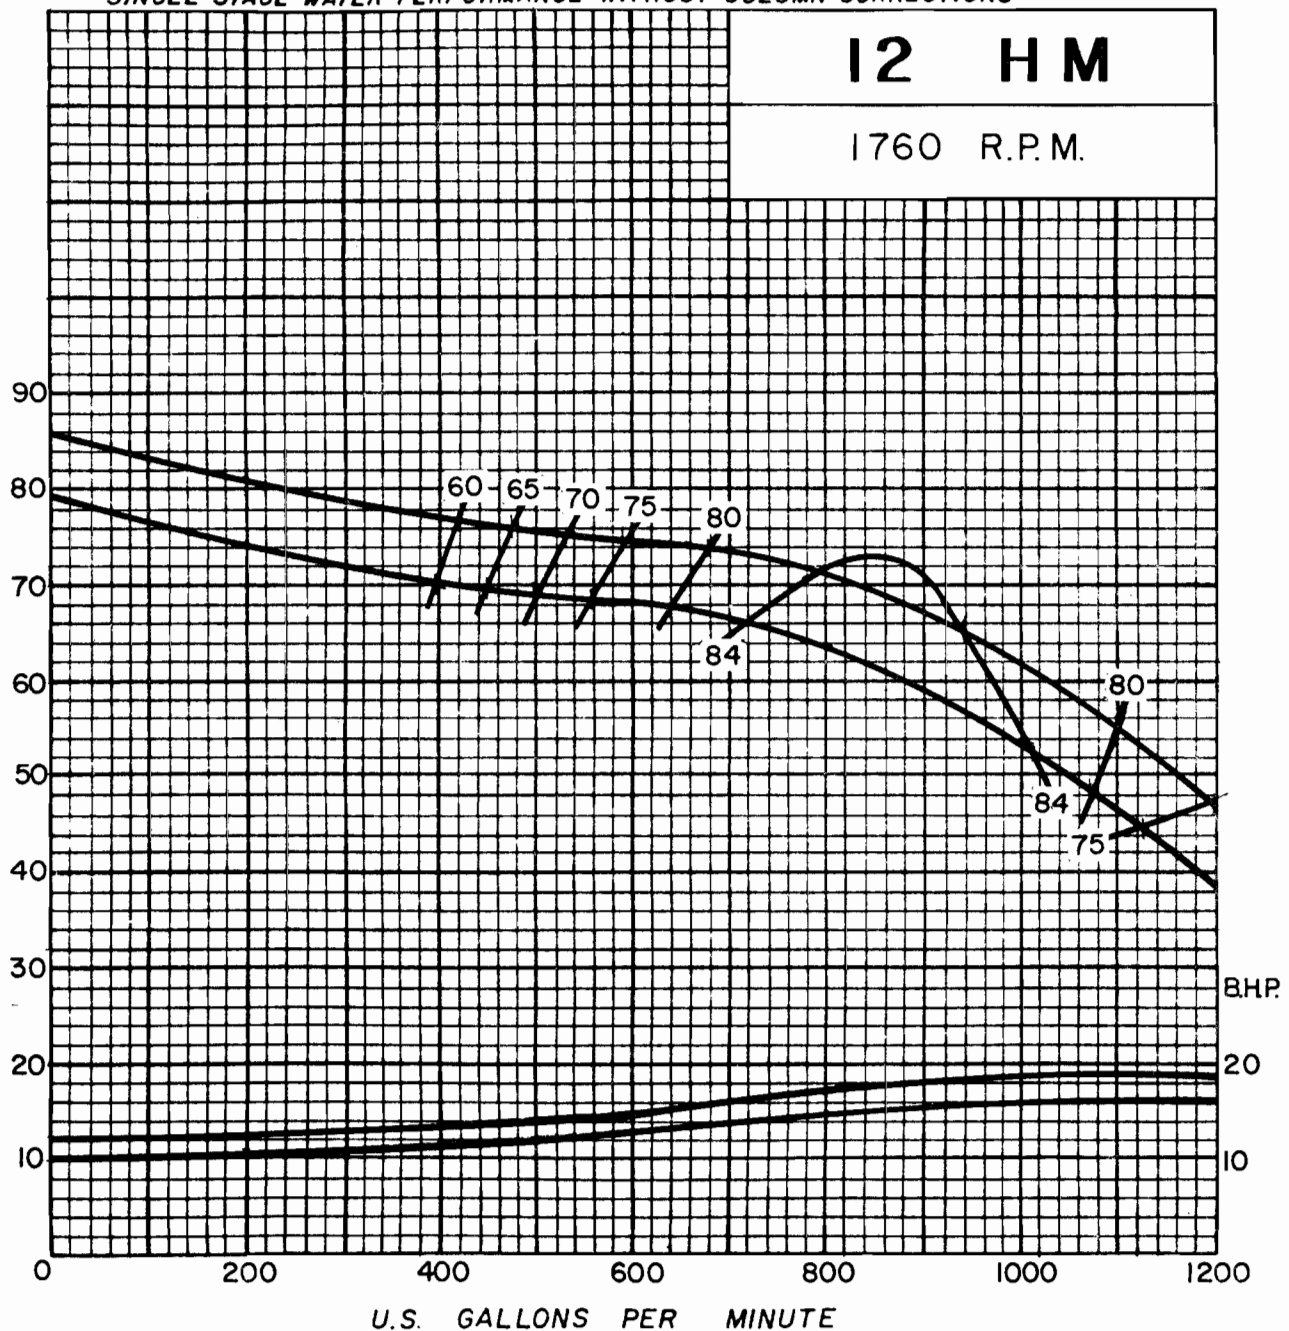

IMPELLER NO.
IMPELLER WT.-LBS.
IMPELLER EYE AREA
ST'D SUCT. SIZES
ST'D DISCH. SIZES
MAX. PRESSURE-PSI
MAX. NO. OF STAGES 13
THRUST FACTOR 7.5

ONE STAGE WT.-LBS. 300
ADD'L STAGE WT.-LBS. 100
SHAFT DIA. 1-11/16
LATERAL 3/4
MAX. SPHERE SIZE
WR² PER STAGE-LB.-FT.²
ADD 9 1/2 IN. PER STAGE

