
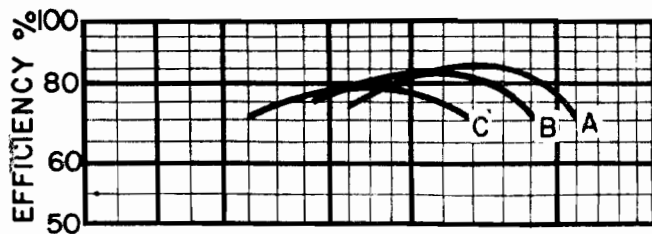
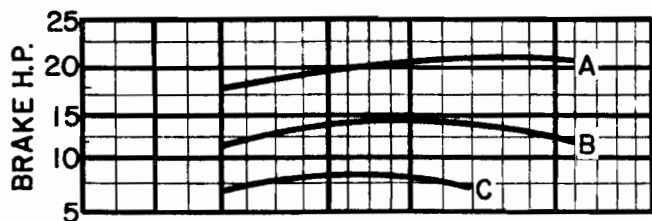


PIONEER

12 PBH SELECTION CURVES


PAGE: 400-030
DATE: 8-24-79
SUPERSEDES: 9-26-78

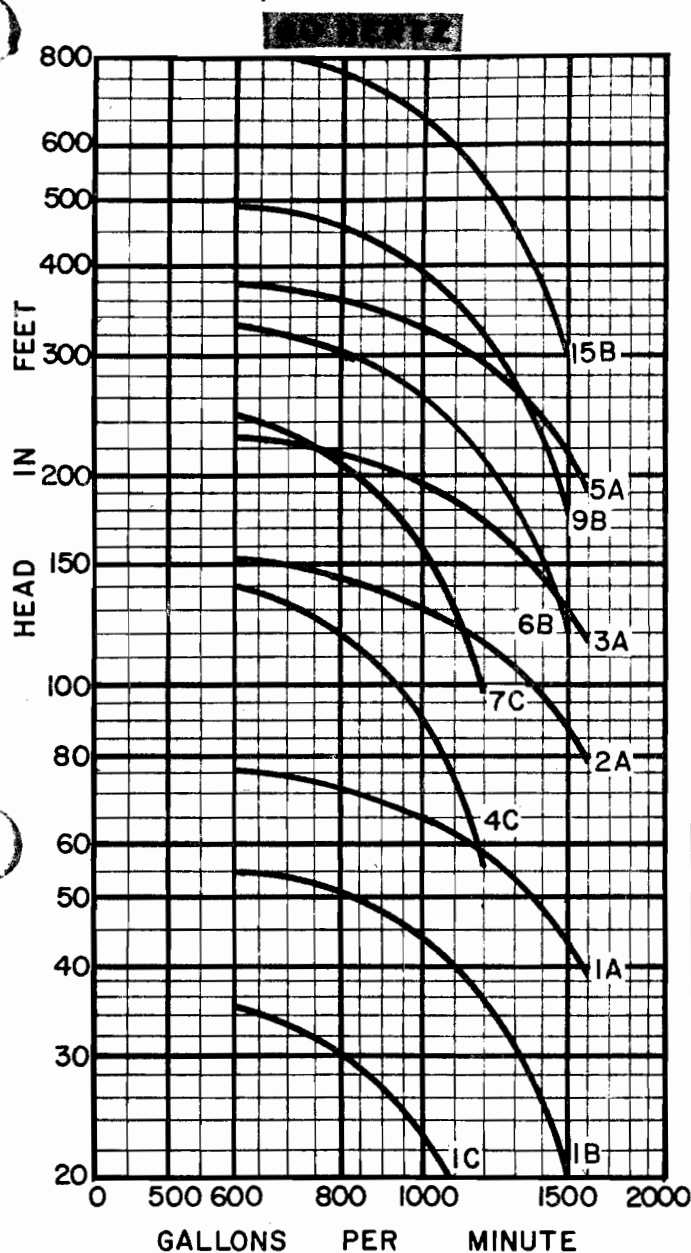

600 TO 1600 R.P.M.

NO. STGS.	MODEL	HP	VOLT	F.L.A.
1C	12PBH34K	7½	460	13.4
1B	12PBH34M	15	460	23.3
1A	12PBH34N	20	460	30.5
4C	12PBH34R	30	460	46.0
2A	12PBH34S	40	460	60.0
7C	12PBH34T	50	460	75.0
3A	12PBH34U	60	460	89.0
6B	12PBH34V	80	460	118
5A	12PBH34Y	100	460	148
9B	12PBH34YP	125	460	153
15B	12PBH34X	200	460	264

Service Factor 1.15

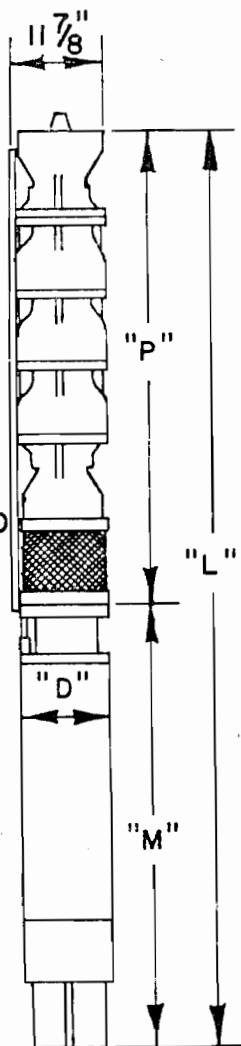

ENCLOSED IMPELLER

37506	9.2
IMP DRG. K	
37512	1760
BOWL DRG. R.P.M.	
11 ¼	28.3
BOWL DIA. EYE AREA	

DIMENSIONS

Discharge Size: 8", 10" N.P.T.

NO. STGS.	HP	D	M	P	L
1C	7½		30.7	41.3	72
1B	15	5.37	34.4	41.3	75.7
1A	20		38.4	41.3	79.7
4C	30	5.37	42.4	72.2	114.6
2A	40	5.37	68.8	51.6	120.4
7C	50	5.37	76.8	103.1	179.9
3A	60	5.37	111	61.9	172.9
6B	80	7.5	62.6*	92.8	155.4
5A	100		50.1*	82.5	132.6
9B	125	9	59*	123.7	182.7
15B	200	10.5	60.2*	185.5	245.7

Dimensions in Inches
*8" or Larger Motors