


CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	
2	
3	

PUMP HYDRAULIC PERFORMANCE IS BASED ON STANDARD MATERIAL OF CONSTRUCTION AND HANDLING CLEAN, FRESH NONAERATED FREE OF FOREIGN MATERIALS

HEAD
IN
FEET

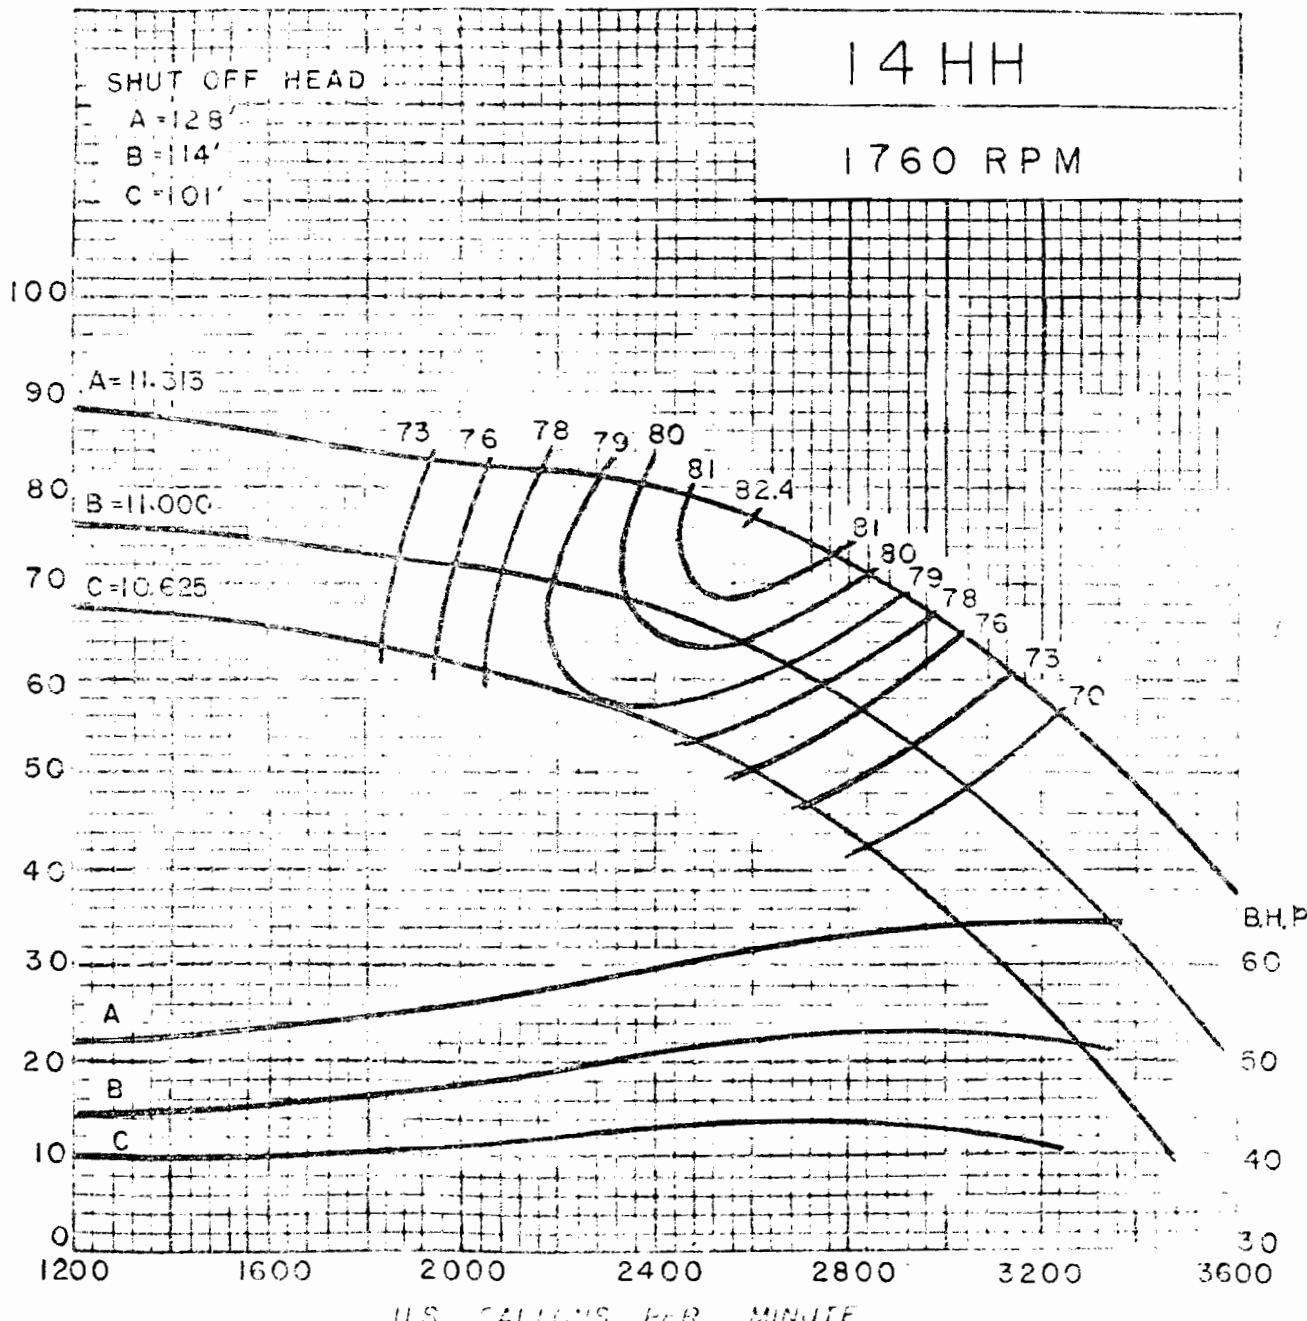

IMPELLER NO 23303
IMPELLER WT. LBS
IMPELLER EYE DIA
ST'D SUPT. SIZE
ST'D DISCH. SIZE
MAX PRESSURE
MAX NO OF STAGES 10
THRUST FACTOR 22

ONE STAGE WT. LBS 470
MAX STAGE WT. LBS 185
SHAFT DIA 1.938
LATEX 3.75
MAX. FLOW 10.25
MAX. HEAD 13.5

