

PIONEER

G1000


SELECTION CURVES

PAGE: 400-030

DATE: 5-23-81

SUPERSEDES: 5-19-80

3450 R.P.M.

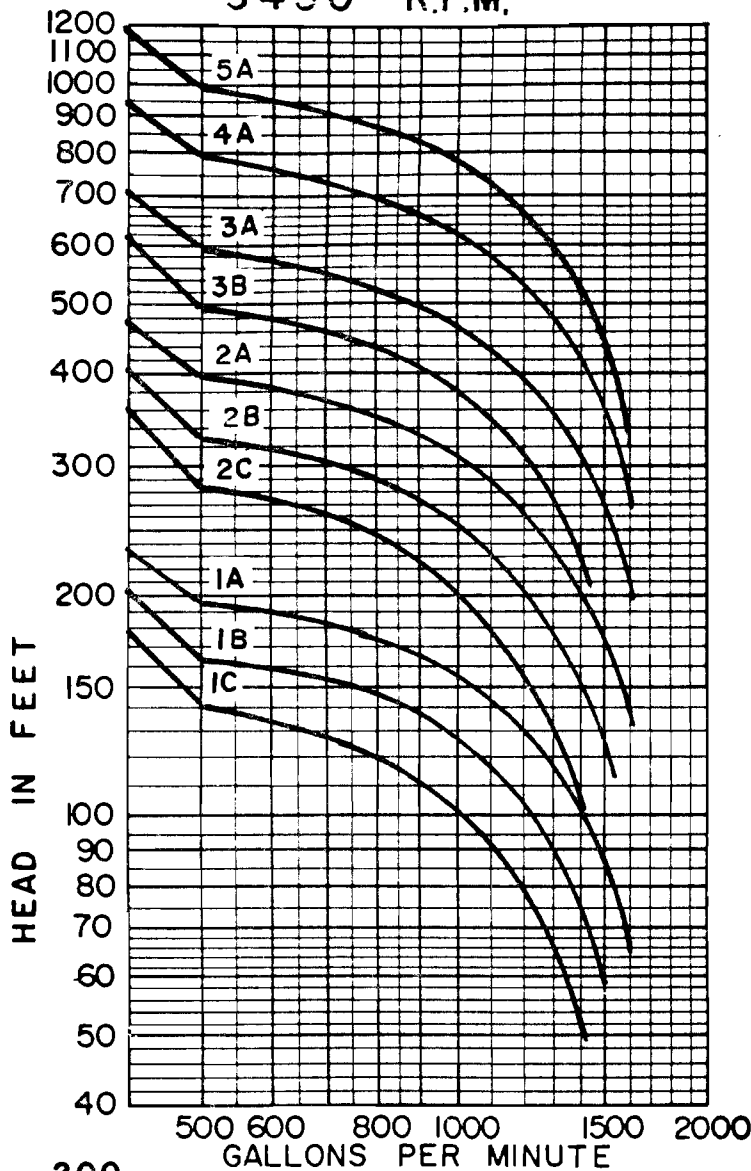

STGS.	MODEL	HP	VOLTS	F.L.
1C	G1032R G1034R	30	230 460	92 46
1B	G1034S G1034SC	40	460	60
1A	G1034T G1034TC	50	460	75
2C	G1034U G1034UC	60	460	89
2B	G1034W	75	460	115
2A	G1034Y	100	460	155
3B	G1034YP	125	460	170
3A	G1034YT	150	460	206.5
4A	G1034X	200	460	264
5A	G1034XT	250	460	326

ENCLOSED IMPELLER

A	7.75 DIA.
B	7.25 DIA.
C	6.75 DIA.
23297	8 34
IMP. DRG.	K
23293	3450
IMPELLER DRG.	R.P.M.
9 3/8	
IMPELLER DIA.	EYE AREA

DIMENSIONS IN INCHES

STGS.	D	M	P	L	W
1C	5 3/8	42 3/8	34 5/8	77	9 11/16
1B	5 3/8	68 11/16	34 5/8	103 5/16	9 11/16
	7 9/16	41 1/8	36 5/8	77 3/4	9 7/8
1A	5 3/8	76 11/16	34 5/8	113 5/16	9 11/16
	7 9/16	44 1/8	36 5/8	80 3/4	9 7/8
2C	5 3/8	83	43 1/4	126 1/4	9 11/16
	7 9/16	47 1/8	45 1/4	92 3/8	9 7/8
2B	7 9/16	52 1/8	45 1/4	97 3/8	9 7/8
2A	7 9/16	60 1/8	45 1/4	105 3/8	9 7/8
3B	*8 5/8	68 7/8	53 7/8	122 3/4	10 3/4
3A	*8 5/8	74 3/8	53 7/8	128 1/4	10 3/4
4A	*8 5/8	82 3/4	62 1/2	145 1/4	10 3/16
5A	10 1/2	89 1/4	71 1/8	160 3/8	11 5/16

