

PIONEER


G1200 SELECTION CURVES

PAGE: 400-031

DATE: 5-23-81

SUPERSEDES: NEW

3450 R.P.M.

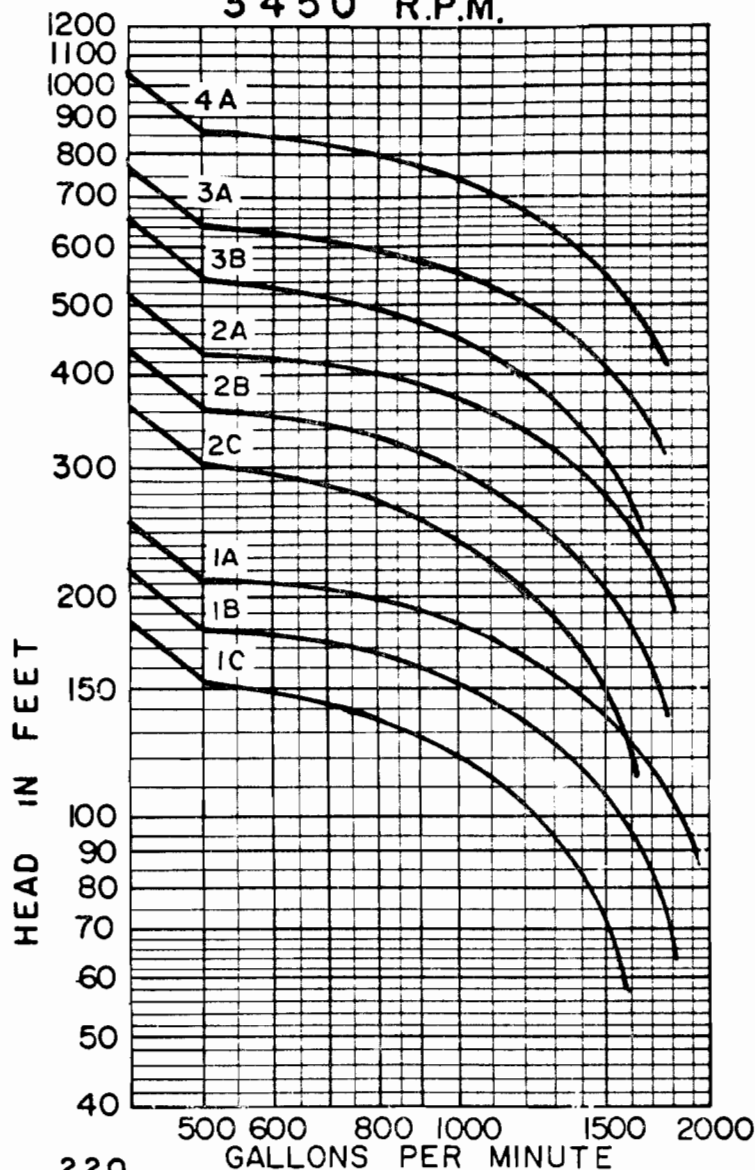


STGS.	MODEL	HP	VOLTS	F.L.A.
1C	G1234S G1234SC	40	460	60
1B	G1234T G1234TC	50	460	75
1A	G1234U G1234UC	60	460	89
2C	G1234W	75	460	116
2B	G1234Y	100	460	155
2A	G1234YP	125	460	170
3B	G1234YT	150	460	207
3A	G1234X	200	460	264
4A	G1234XT	250	460	326

CHANGE IN EFFICIENCY	
NO. OF STAGES	NO. OF POINTS
1	-4
2	-3
3	-2
4	-1

ENCLOSED IMPELLER

A	7.75 DIA.
B	7.25 DIA.
C	6.75 DIA.
23298	8.34
IMP. DRG.	K
23293	3450
BOWL DRG.	R.P.M.
9 3/8	EYE AREA
BOWL DIA.	

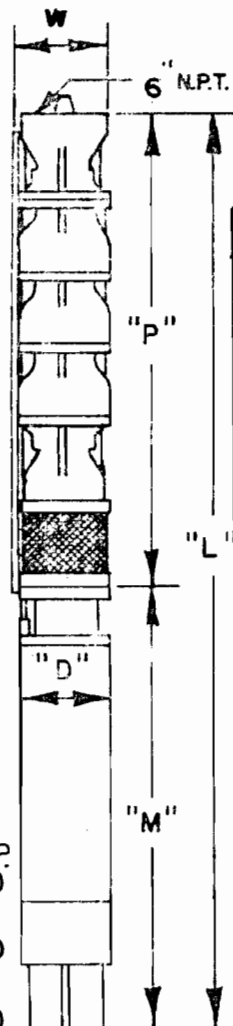

DIMENSIONS IN INCHES

STGS.	D	M	P	L	W
1C	5 3/8	68 3/4	34 5/8	103 3/8	9 11/16
	7 9/16	41 1/8	36 5/8	77 3/4	9 7/8
1B	5 3/8	76 3/4	34 5/8	113 3/8	9 11/16
	7 9/16	44 1/8	36 5/8	80 3/4	9 7/8
1A	5 3/8	83	34 5/8	117 5/8	9 11/16
	7 9/16	47 1/8	36 5/8	83 3/4	9 7/8
2C	7 9/16	52 1/8	45 1/4	97 3/8	9 7/8
2B	7 9/16	60 1/8	45 1/4	105 3/8	9 7/8
2A	8 5/8	68 7/8	45 1/4	114 1/8	10
3B	8 5/8	74 3/8	53 7/8	128 1/4	10 1/16
3A	8 5/8	82 3/4	53 7/8	136 5/8	10 1/16
4A	10 1/2	89 1/4	62 1/2	151 3/4	10 7/16

