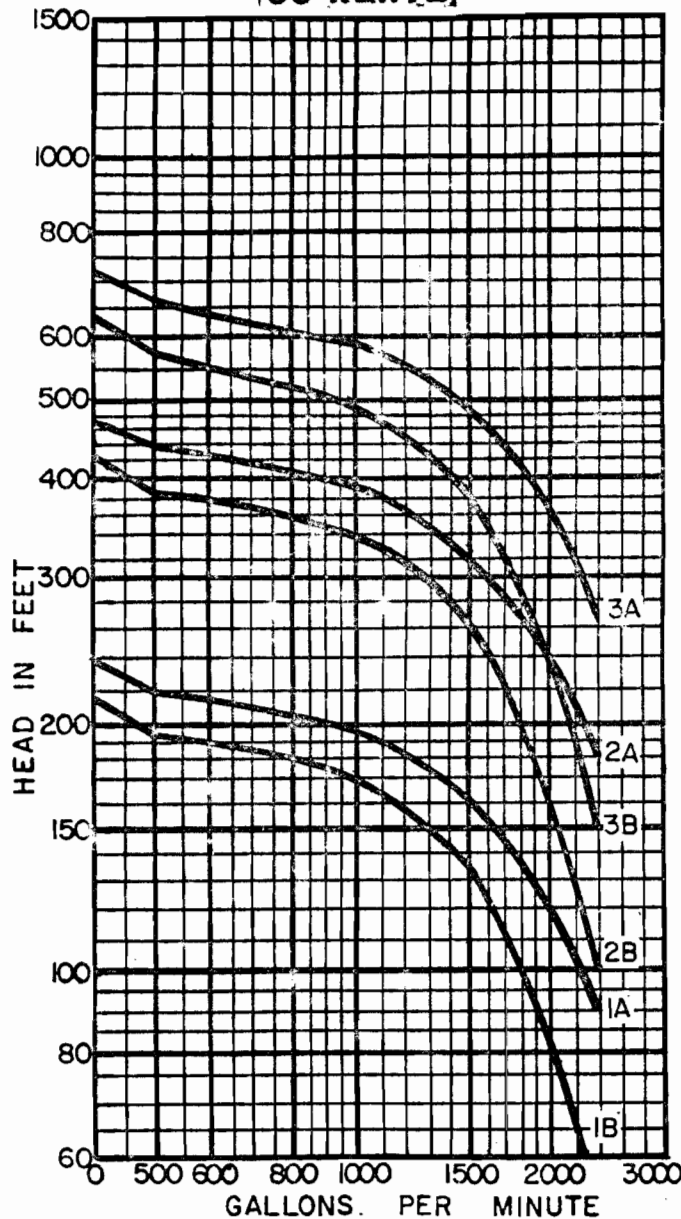


DATE: 5-16-80

PIONEER**G 1400**



SUPERSEDES:

SELECTION CURVES

60 HERTZ**800 TO 2400 G.P.M.**

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1A	G1434W	75	460	110
1B	G1434U	60	460	89
2A	G1434YW	175	460	213
2B	G1434YP	125	460	153
3A	G1434XT	250	460	326
3B	G1434X	200	460	264

Service Factor 1.15

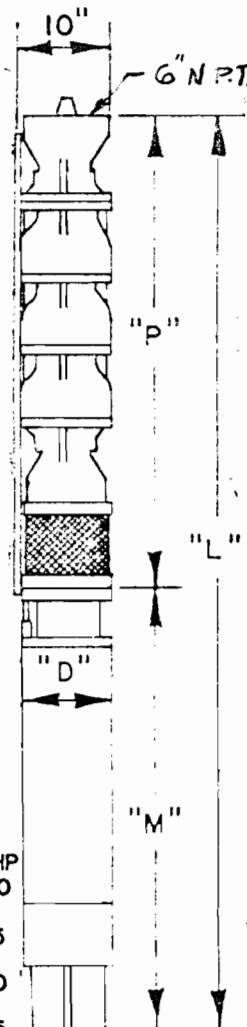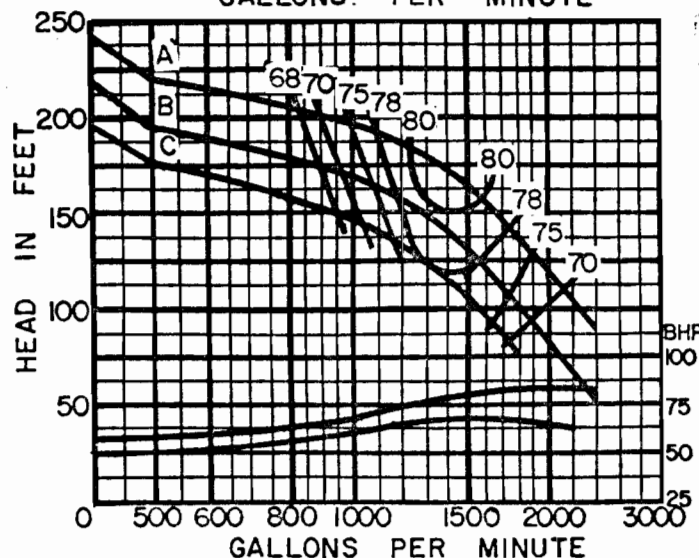

ENCLOSED IMPELLER

23299 IMP. DRG.	8.34 K
23293 BOW' DRG.	3450 R.P.M.
9 1/2 BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 8", 10", 12" N.P.T.

NO. STGS.	HP	D	M	P	L
1A	75	7.5	62.6	52.2	114.8
1B	60	5.37	111	52.2	163.2
2A	175	10.5	60.2	61.5	121.7
2B	125	9	59	61.5	120.5
3A	250	10.5	89.0	70.5	15'
3B	200	10.5	60.2	70.5	13'

Dimensions in Inches