
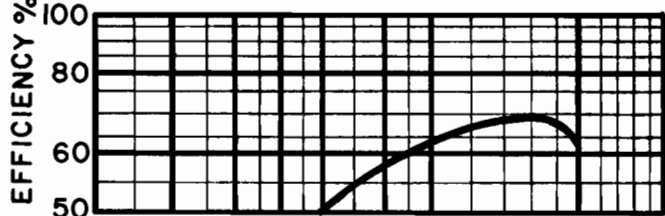
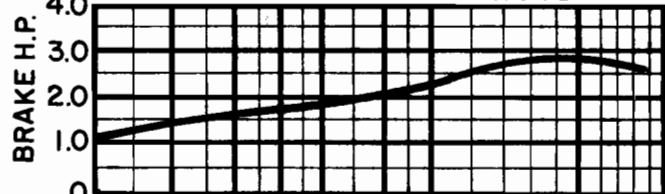


PIONEER

P 160 SELECTION CURVES

PAGE: 300-012
DATE: 6-25-79
SUPERSEDES: 4-17-78

60 HERTZ

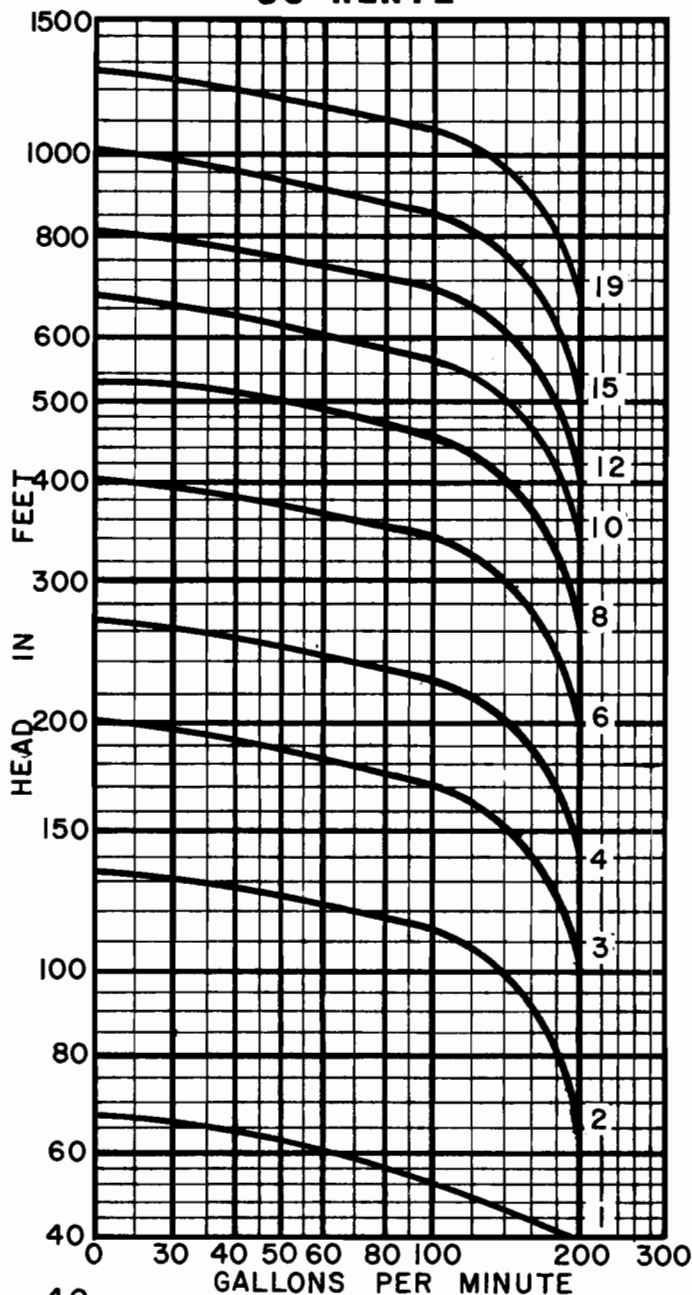

90 TO 200 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	P16012H	3	230	16.5
	P16032H		230	11.4
	P16034H		460	5.7
2	P16012J	5	230	17.5
	P16032J		230	17.4
	P16034J		460	8.7
3	P16012K	7½	230	40.0
	P16032K		230	26.8
	P16034K		460	13.4
4	P16012L	10	230	52.0
	P16032L		230	32.0
	P16034L		460	16.0
6	P16032M	15	230	46.6
	P16034M		460	23.3
8	P16032N	20	230	61.0
	P16034N		460	30.5
10	P16032P	25	230	75.0
	P16034P		460	37.5
12	P16032R	30	230	92.0
	P16034R		460	46.0
15	P16034S	40	460	60.0
19	P16034T	50	460	75.0

Service Factor 1.15

OPEN IMPELLER


23001 IMP DRG.	3.4 K
23000 BOWL DRG.	3450 R.P.M.
5⅜ BOWL DIA.	4.1 EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	3	3.75	23.0	17.3	40.3
2	5		28.5	21.0	49.5
3	7½	5.37	30.7	24.8	55.5
4	10		34.4	28.6	63.0
6	15		34.4	39.8	74.2
8	20	5.37	38.4	43.6	82.0
10	25		42.4	51.1	93.5
12	30		42.4	58.6	101
15	40		68.8	69.9	138.7
19	50	5.37	76.8	84.9	161.7

Dimensions in Inches

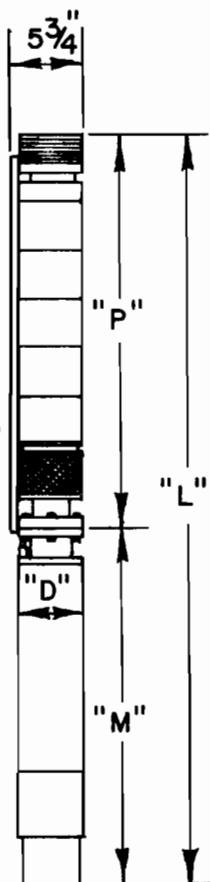

WELL
SIZE
6"