




PIONEER

P 230

SELECTION CURVES

60 HERTZ


180 TO 300 G.P.M.

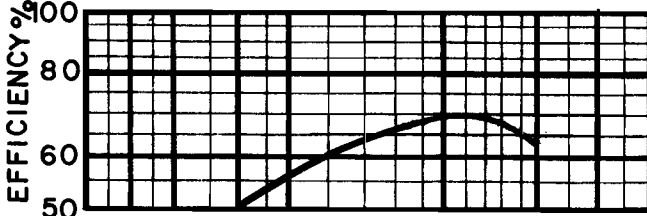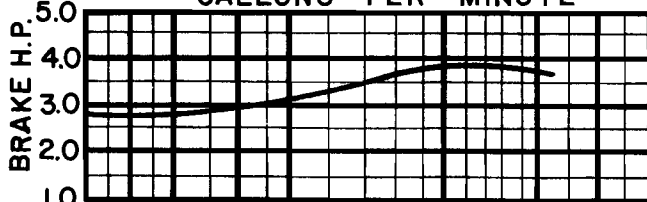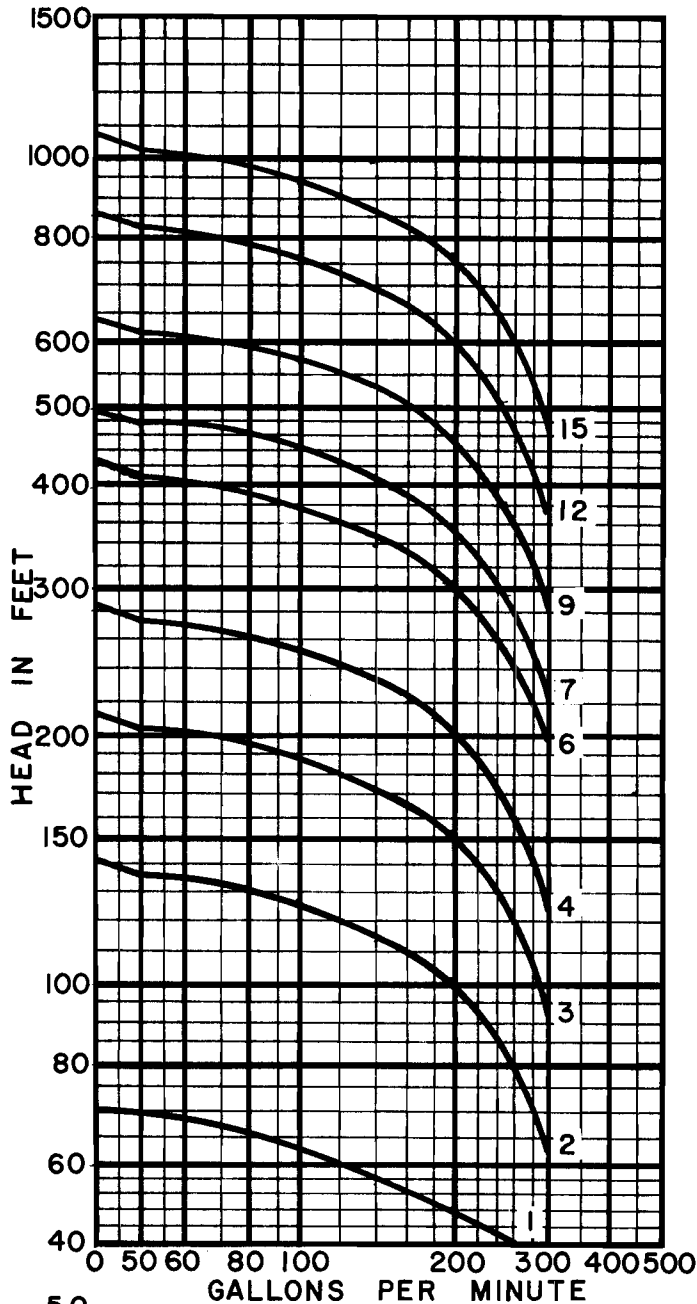

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	P23012J	5	230	27.5
	P23032J		230	17.4
	P23034J		460	8.7
2	P23012K	7½	230	40.0
	P23032K		230	26.8
	P23034K		460	13.4
3	P23012L	10	230	52.0
	P23032L		230	32.0
	P23034L		460	16.0
4	P23032M	15	230	46.6
	P23034M		460	23.3
6	P23032N	20	230	61.0
	P23034N		460	30.5
7	P23032P	25	230	75.0
	P23034P		460	37.5
9	P23032R	30	230	92.0
	P23034R		460	46.0
12	P23034S	40	460	60.0
15	P23034T	50	460	75.0

Service Factor 1.15

WELL
SIZE
6"

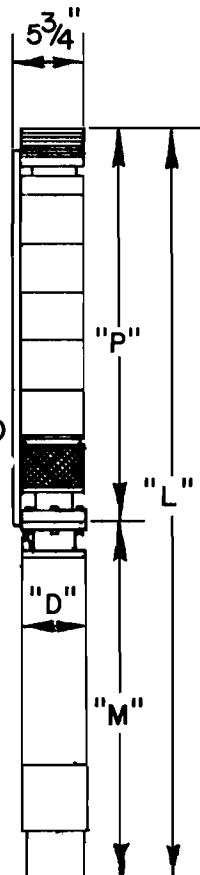

OPEN IMPELLER	
23023 IMP. DRG.	2.0 K
23024 BOWL DRG.	3450 R.P.M.
5 3/8 BOWL DIA	4.65 EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	5	3.75	28.5	18.3	46.8
2	7½		30.7	23.3	54.0
3	10	5.37	34.4	28.3	62.7
4	15		34.4	33.3	67.7
6	20		38.4	42.3	80.7
7	25	5.37	42.4	47.3	89.7
9	30		42.4	57.3	99.7
12	40		68.8	72.3	141.1
15	50	5.37	76.8	87.3	164.1

Dimensions in Inches