
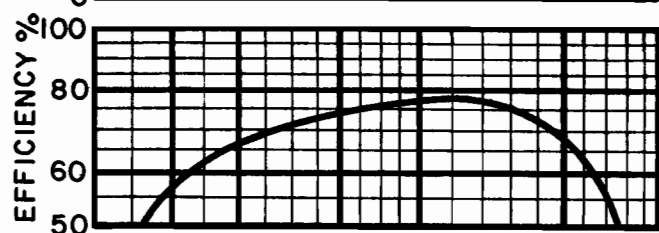
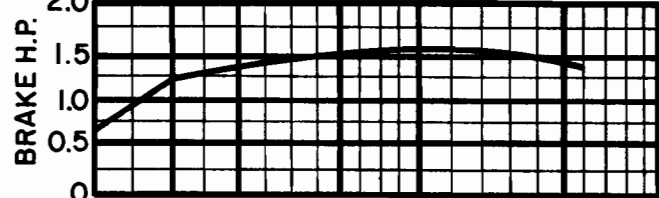


PIONEER

PA 100 SELECTION CURVES

PAGE: 300-010
DATE: 6-26-79
SUPERSEDES: 4-17-79

60 HERTZ

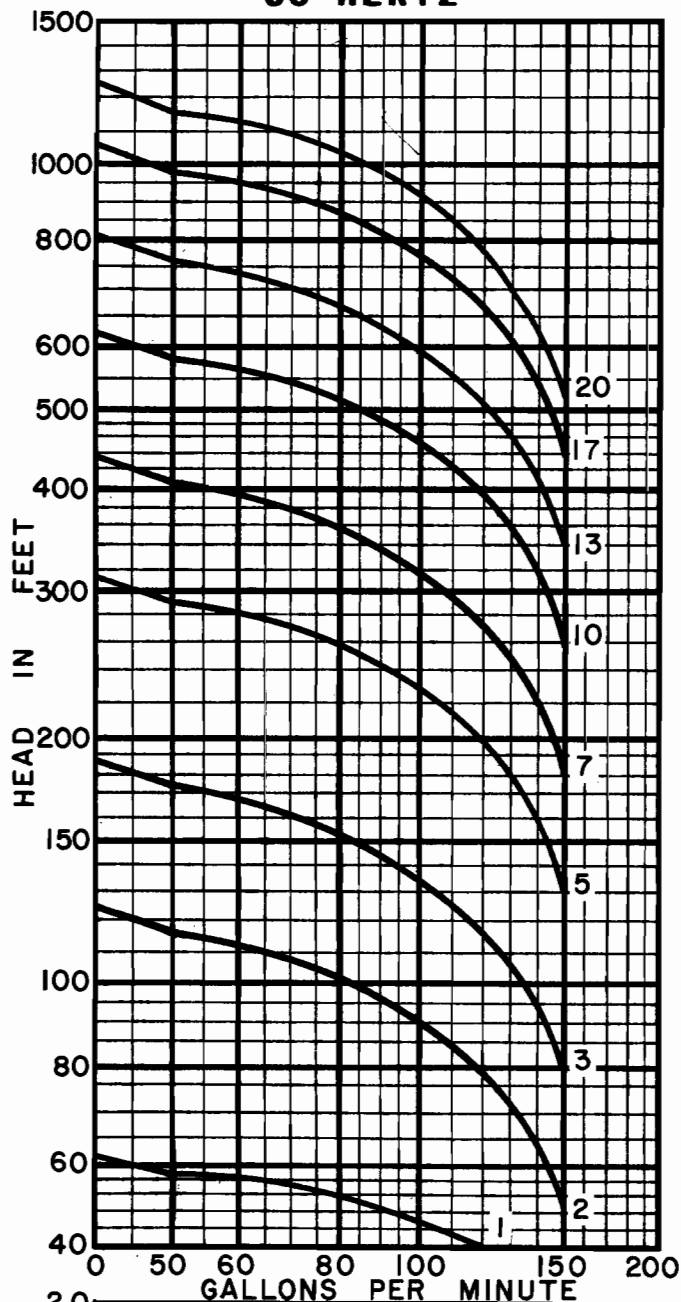

60 TO 150 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PA10012F	1½	230	11.5
	PA10032F		230	6.3
	PA10034F		460	3.1
2	PA10012H	3	230	16.5
	PA10032H		230	11.4
	PA10034H		460	5.7
3	PA10012J	5	230	27.5
	PA10032J		230	17.4
	PA10034J		460	8.7
5	PA10012K	7½	230	40.0
	PA10032K		230	26.8
	PA10034K		460	13.4
7	PA10012L	10	230	52.0
	PA10032L		230	32.0
	PA10034L		460	16.0
10	PA10032M	15	230	46.6
	PA10034M		460	23.3
13	PA10032N	20	230	61.0
	PA10034N		460	30.5
17	PA10032P	25	230	75.0
	PA10034P		460	37.5
20	PA10032R	30	230	92.0
	PA10034R		460	46.0

Service Factor 1.15

OPEN IMPELLER


23055 IMP. DRG.	3.7 K
23000 BOWL DRG.	3450 R.P.M.
5 3/8 BOWL DIA.	4.1 EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	1½	3.75	19.9	17.3	37.2
2	3		23.0	21.0	44.0
3	5		28.5	24.8	53.3
5	7½	5.37	30.7	32.3	63.0
7	10		34.4	39.8	74.2
10	15		34.4	51.1	85.5
13	20	5.37	38.4	62.3	100.7
17	25		42.4	77.4	119.8
20	30		42.4	88.7	131.1

Dimensions in Inches

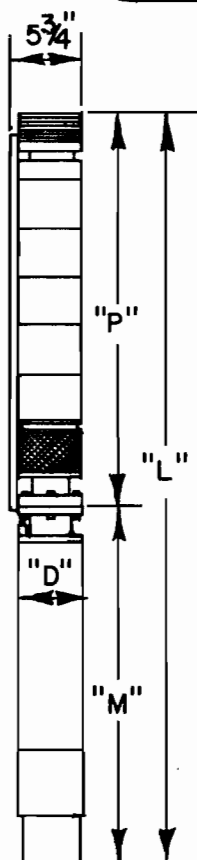

WELL
SIZE
6"