
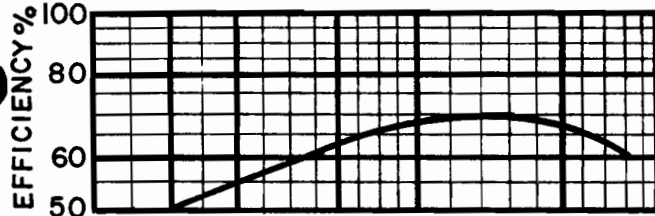
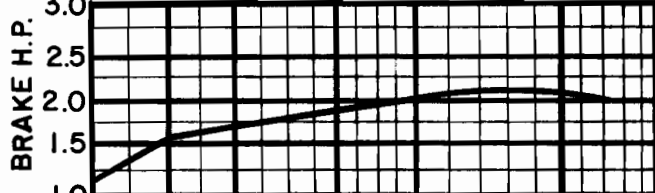


PIONEER

PA 130 SELECTION CURVES

PAGE: 300-011
DATE: 6-26-79
SUPERSEDES: 4-17-78

60 HERTZ

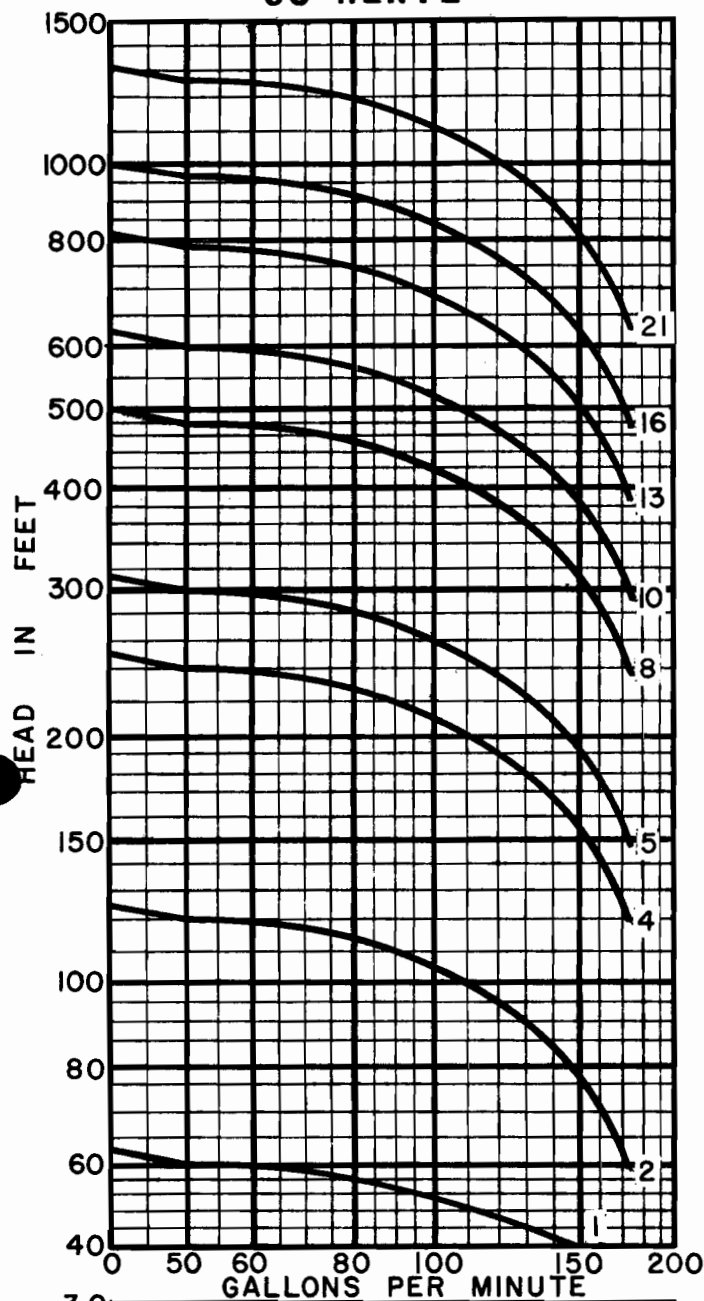


75 TO 175 G.P.M.

NO. STGS.	MODEL	HP	VOLTS	F.L.A.
1	PA13012H	3	230	16.5
	PA13032H		230	11.4
	PA13034H		460	5.7
2	PA13012J	5	230	27.5
	PA13032J		230	17.4
	PA13034J		460	8.7
4	PA13012K	7½	230	40.0
	PA13032K		230	26.8
	PA13034K		460	13.4
5	PA13012L	10	230	52.0
	PA13032L		230	32.0
	PA13034L		460	16.0
8	PA13032M	15	230	46.6
	PA13034M		460	23.3
10	PA13032N	20	230	61.0
	PA13034N		460	30.5
13	PA13032P	25	230	75.0
	PA13034P		460	37.5
16	PA13032R	30	230	92.0
	PA13034R		460	46.0
21	PA13034S	40	460	60.0

Service Factor 1.15

WELL
SIZE
6"

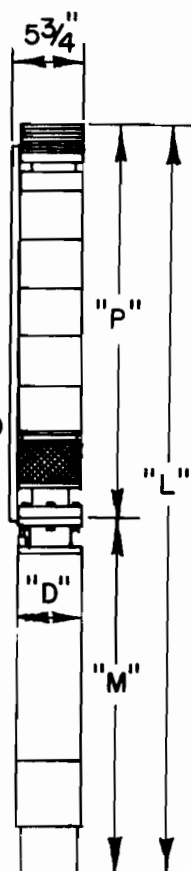

OPEN IMPELLER

23055	3.7
IMP DRG.	K
23000	3450
BOWL DRG.	R.P.M.
5 3/8	4.1
BOWL DIA.	EYE AREA

DIMENSIONS

Discharge Size: 4" N.P.T.

NO. STGS.	HP	D	M	P	L
1	3	3.75	23.0	17.3	40.3
2	5		28.5	21.0	49.5
4	7½	5.37	30.7	28.6	59.3
5	10		34.4	32.3	66.7
8	15	5.37	34.4	43.6	78.0
10	20		38.4	51.1	89.5
13	25	5.37	42.4	62.3	104.7
16	30		42.4	73.6	116.0
21	40	5.37	68.8	92.4	161.2

Dimensions in Inches